



벤처기업



벤처디자인



INNOBIZ
중소기업 기술혁신 협회




SUNGIL

Ultra-precision Couplings
Connecting Shaft
Support Units
FA Units
A.P. Lock



SUNGIL MACHINERY

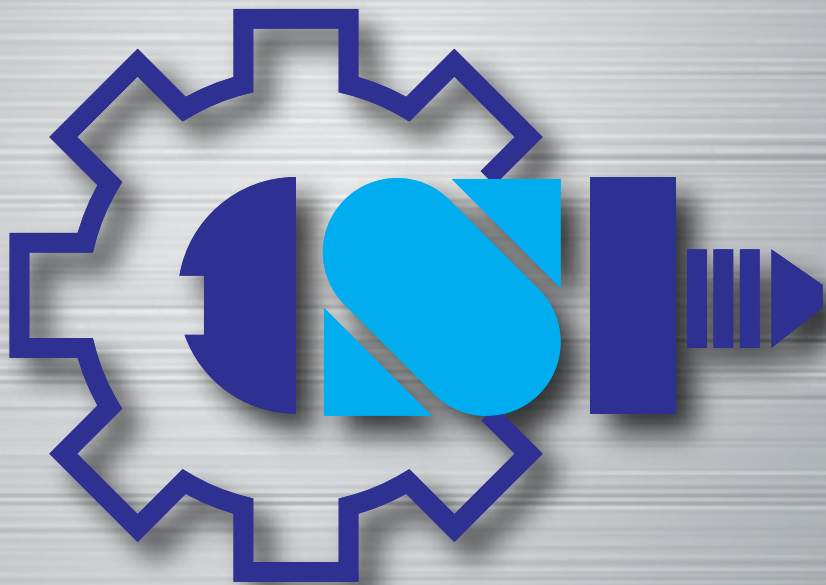



Sungil's efforts to become the no.1 F.A. machinery company will continue.

Sungil Machinery Co., Ltd. is Korea's first F.A. machinery company that invented and mass produced compact high precision couplings. With continuous effort for innovation and product development, Sungil Machinery Co., Ltd. now has the most diverse portfolio of high precision coupling products in the world. Furthermore, it has put tremendous effort in improving the competitiveness of the Korean F.A. market by producing various high quality F.A. components such as support units for ball screw, connecting shaft, and A.P. locks.

[Sungil Machinery Co., Ltd. which is currently Korea's No.1 F.A. parts manufacturer, now strives to expand to the global market.](#) To achieve this goal, it has established branch offices in China and Japan. Furthermore, it has built a global network of authorized dealers.

Sungil Machinery Co., Ltd. will continue to place customer satisfaction as our No. 1 goal and work to earn our customers' trust by focusing on new product development, productivity improvement, and strict quality control. We would like to express our deepest gratitude to customers support Sungil Machinery Co., Ltd and our products.

Company History

SINCE 1991..

Foundation

Pioneer of F.A. component industry related to power transmission in Republic of Korea

Domestically first development and commercialization of various types of high precision couplings.

Growth

- ▶ Expanding domestic market share of coupling in F.A. industry.
- ▶ Continuous product development

Globalization

- ▶ Exporting Sungil's products to 25 countries.
- ▶ Founding branches in Japan and China.

- 1992 03 Founded Sungil Machinery
- 1992 06 Developed oldham couplings (SOH Series) domestically first.
 - 03 Developed disc(SD Series), Urethane flexible(SFC Series) couplings domestically first.
- 1996 12 Developed cross joint(SCJ), radial beam(SRB) and jaw(SJC) type couplings domestically first.
- 2005 12 Acquired ISO 9001:2000 certification
 - 12 Developed support units for ball screws
- 2006 11 Signed written agreement with Seoul National University of Science and Technology
 - 12 Awarded silver prize in SFC product venture design (Korea Institute of Design Promotion)
 - 12 Recognized as technology innovation company (INNO-BIZ) (Small and Medium Business Administration)
 - 12 Founded Sungil technology institute (Korea Industrial Technology Association)
- 2007 03 Signed academic-industrial cooperation agreement with Department of Mechanical Design Automation (Seoul National University of Science and Technology)
 - 03 Selected as export-oriented company (Small and Medium Business Administration)
 - 04 Signed written agreement of corporate-technical high school human resources (Yuhan Technical High school)
 - 04 Confirmed as parts specialized company (Minister of Trade, Industry & Energy)
 - 06 Was selected and performed 'small and medium-sized business technology innovation project'
 - 07 Developed high torque disc coupling (SHD Series)
 - 10 Awarded as man of merit who developed excellent capital goods from Prime Minister
 - 12 Awarded participation prize in SHD product venture design (Korea Institute of Design Promotion)
- 2008 02 Incorporation of going business (Sungil Machinery Co., Ltd.)
 - 03 Selected as export-oriented company (Small and Medium Business Administration)
 - 08 Founded a research institution affiliated with Sungil Machinery Co., Ltd (Korea Industrial Technology Association)
- 2009 03 Was selected and performed 'small and medium-sized business technology innovation project'
 - 09 Developed high performance rubber type couplings (SHR Series)
- 2010 03 Awarded exemplary taxpayer (YangCheon tax office)
 - 05 First development in the world of a assembly method of a light preloaded (C7) support units using regular angular bearing
- 2011 02 Developed and manufactured aluminum power lock first in the world
 - 06 Was selected and performed 'Foundation and development project' (Small and Medium Business Administration)
 - 06 Awarded 'Local economy development' (Mayor of Seoul)
 - 09 Awarded man of merit badge (Korean Red Cross)
 - 10 Awarded as corporation which developed excellent capital goods (Presidential prize)
- 2012 03 Awarded badge of honor (Korean Red Cross)
 - 03 Founded Sungil China branch office (Sungil machinery(Wuxi) Co., Ltd.)
 - 09 Awarded 'Outstanding individual of small and medium business technology innovation' (Prime minister)
 - 11 Signed academic-industrial cooperation agreement with Department Automobile engineering (Seoul National University of Science and Technology)
- 2013 01 Developed and standardized connecting shafts
 - 01 Developed A.P. Lock and started mass production
 - 02 Awarded exemplary taxpayer (Ministry of Strategy and Finance)
 - 06 Was selected as export incubator in Tokyo, Japan (KOTRA)
 - 06 Was selected as Promising Export Firm by Small and Medium Business Administration)
 - 09 Founded a branch office in Tokyo, Japan (SI-CENTRAL Co., Ltd)
- 2014 04 Awarded The Grand Prize of Commerce & Industry in Yangchoen-gu (The Korea Chamber of Commerce and Industry)
 - 09 Started Branch-Promotion Project with KOTRA (KOTRA)
 - 10 Awarded the outstanding result corporation of R&D project funded by SBA (Seoul Business Administration)
- 2015 05 Appointed as Korea Sinzisikin(New brain leader). (Korea Sinzisikin Association)
 - 08 Selected as a Korea Master Technician. (Ministry of Employment and labor)"

Sungil's Certifications and Prizes

Certifications




Sungil research institute



ISO 9001



ISO 14001



Certificate of SINZISIKIN (new brain leader)



INNO-BIZ certification



Venture company certification



Company specialty in components



Industrial and educational cooperation agreement



Promising Export Firm



Best Work Place

Sungil is an outstanding F.A. component manufacturer in Korea. Sungil has established 'Sungil Research Institute' to make itself competitive through researching and developing its technology to provide high quality products and services.

'Sungil Research Institute' focus on government projects, developing new products, improving performance, increasing productivity and technical support service cooperating with industries, educational institutes and other laboratories.

Until now, Sungil has conducted 4 government projects, pending or registered 7 patents, 5 utility models, 16 designs of F.A. components and still developing new products that correspond to customers needs.

Accumulating technology is the only way to enter the global top 3 ultra precision coupling manufacturer and be the outstanding F.A. component brand. Sungil promises to provide the best products and services to customers.

Prizes and Social Contribution



President prize (excellent component manufacturing)



Prime minister prize



Good tax-payer's prize



Gold prize of red cross



Excellent government funded R&D Performance



Certificate of Korea Master Technician

Sungil was founded at 1991 and since then it has stuck to F.A. component manufacturing. Even only a single component, from manufacture to assemble, we make it with craftsman's spirit. Quality is the first value that we pursue. Sungil made domestic customers competitive by manufacturing products domestically which were before imported. This was recognized by the government and Sungil was awarded by the president(2011).

Also Sungil is a social enterprise. We have continuously

hired young workers from technical high school and passed on our technical know-how because we believe that as a manufacturing company training domestic human source is a company's responsibility. Sungil has also participated in the Red Cross Work. For these contributions Sungil has awarded by the prime minister and the Korea national red cross.








Sungil will contribute on national competitive for F.A. industry and be a honest company as always. Thank you for your support sincerely.








Contents

Ultra-precision Couplings

13 Introduction



MODEL	SRB Series [Radial Beam Type]				SOH Series [Oldham Type]		
	SRB	SRBM	SRBS	SRBMS	SOH	SOHM	SOH(Big)
Figure							
	Al7075-T6	Al7075-T6	Stainless	Stainless			
Page	18~21				22~24		25




MODEL	SD Series [Disc Type]				SHD Series [High Torque Disc Type]	SCJ Series [Cross Joint Type]	
	SD□S	SD□W	SD□SS	SD□WS	SHDS	SHDW	SCJ
형상							
			Stainless	Stainless	Al7075-T6	Al7075-T6	
Page	26~31		32~33		34~37		38~39

MODEL	SRG Series [Rigid Type]		SFC Series [Urethan Flexible Type]	SJC Series [Jaw Type]		SHR Series [Gum Type]	
	SRG	SRGL	SFC	SJC	SJCM	SJC-□□T	SHR
Figure							
Page	40~41		42	43~50		51~53	

Connecting Shaft

53 Characteristics and Intrallation



MODEL	SJCL Series	SJCTL Series	SHDL Series
Coupling Type	Jaw Type	Jaw Type	High Torque Disc Type
Figure			
Page	56~57	58~59	60~61

Support Unit

63 characteristics
64 How to Order and Ball Bearing for standard Types
65 Mounting Procedure



MODEL	EK	EF	BK	BF	AK	AF
Figure						
Grade	P5, C8, P0-C7	-	P5, C8, P0-C7	-	P5, C8, P0-C7	-
Page	70	71	72	73	74	75

MODEL	FK	FF	CK	CF	WBK (Miniature Type)	SWBK (For High-load application)
Figure						
Grade	P5, C8, P0-C7	-	P5, C8, P0-C7	-	-	With TAC bearing
Page	76	77	78	79	80	81

F.A. Unit



MODEL	Joint Unit		Lock Nut	Bearing Unit	
	SJU	SBJU	RN	SBS	SBD
Figure					
Remark	-	-	-	Single Bearing Support	Double Bearing Support
Page	83	84	85	86	

A.P. Lock

84 Design and Installation guide



MODEL	SAPL-A Series			SAPL-B	SAPL-C Series		
	SAPL-A	SAPL-AS	SAPL-AK		SAPL-C	SAPL-CS	SAPL-CK
Material of Body	S45C	SUS304	S45C (Electroless Nickel Plating)	S45C	S45C	SUS304	S45C (Electroless Nickel Plating)
Figure							
Page	92~93	94	95	96~97	98~99	100	101

MODEL	SAPL-D1	SAPL-D2	SAPL-D3	SAPL-D4	SAPL-T	SAPL-R	SAPC	SAPA
Material of Body	S45C	S45C	S45C	S45C	S45C	S45C	High Strength Aluminum Alloy	High Strength Aluminum Alloy
Figure								
Page	102~103	104~105	106~107	108~109	110~111	112~114	115~117	118~120

New Product Descriptions

Subminiature SOH & SRB Series



SOH Series	Product Number	Shaft Clamping Method	Dimension (mm)		Max. Torque (Nm)	Rated Torque (Nm)
			External Diameter(D)	Total Length(L)		
	SOH-6	Set Screw	5.9	8.4	0.4	0.2
	SOH-8	Set Screw	7.9	9.8	1	0.5
	SOH-8SS	Set Screw	7.9	12.6	1	0.5
	SOH-10	Set Screw	9.9	10.4	1.4	0.7
	SOH-12	Set Screw	11.9	14.5	1.8	0.9
	SOHM-12C	Clamp	11.9	16.5	1.8	0.9

※ Remark: No Alumite

SRB Series	Product Number	Shaft Clamping Method	Dimension (mm)		Max. Torque (Nm)	Rated Torque (Nm)
			External Diameter(D)	Total Length(L)		
	SRB-8	Set Screw	7.9	14	0.2	0.1

※ Remark: No Alumite

■ The subminiature couplings have been standardized reflecting the needs of usage at a limited space or of shaft clamping when bore size is smaller than Ø3.

SD series Ø35 size

Now available for sale



SD Series	Product Number	Shaft Clamping Method	Dimension (mm)		Max. Torque (Nm)	Rated Torque (Nm)
			External Diameter(D)	Total Length(L)		
	SDS-35C	Clamp	35	28	8	4
	SDWA-35C	Clamp	35	34.6	8	4
	SDWC-35C	Clamp	35	38.1	8	4


■ SD series with external 35 (clamp) is a medium sized substitute which have been designed especially for customers who concern weak clamping force of 31C when there is not enough space for 39C.

P.26~P.31


Support unit for High-load applications and machine tools

- TAC Bearing (High strength thrust angular contact ball bearing) is inserted in the Support unit for High-load applications and machine tools.
- Bore range is standardized from $\varnothing 25$ to $\varnothing 40$.
- Appropriate lock nuts are used for high-load applications and machine tools.


Model no.	Bearing type	Basic dynamic rated load (kgf)	Static permissible load (kgf)
SWBK25 DF	25TAC 62B	2910	4150
SWBK25 DFD	25TAC 62B	4700	8300
SWBK30 DF	30TAC 62B	2980	4400
SWBK30 DFD	30TAC 62B	4850	8800
SWBK35 DF	35TAC 72B	3150	5100
SWBK35 DFD	35TAC 72B	5150	10200
SWBK35 DFF	35TAC 72B	5150	10200
SWBK40 DF	40TAC 72B	3250	5300
SWBK40 DFD	40TAC 72B	5250	10600
SWBK40 DFF	40TAC 72B	5250	10600



2열 DF 조합



3열 DFD 조합



4열 DFF 조합

P.81

SJC-■■■T

new

Taper Ring Type Clamp Hub of SJC (Jaw Coupling)

- Be optimized for Spindle of Machining Tool with high rotation speed and operation torque.
- Perfect symmetric structure with rotating axis
- Well standardized from OD 55mm to OD 100mm



P.49

SHD■■ - 110■ Series

new

Extra Larged-sized SHD model

- Outer Diameter : 110 mm
- Single disk type (SHDS) and Double disk type (SHDW) type are available.
- Various Clamping ways are available (Set screw, Side Clamping & Taper ring type)



P.34 ~ P.37

SD■■S-■■C

new

Stainless Steel Disk Coupling

- All parts of disk type coupling is made up of stainless steel.
- Various sizes are standardized. (outer diameter : 19mm ~ 64mm)
- Be optimal for vacuum or clean room environment
It is available to manufacture larger sized product that is excluded from catalog (ex. SD□□S- 80C, 90C, 100C)



P.32~P.33

SHR-■■C

new

SHR Series : High Performance Rubber Coupling

- The middle body is made up of HNBR
- Be optimized for high gain system of servo motor.
- Can minimize the over/under shoot caused by rapid acceleration or deceleration
- Excellent ability to absorb vibration and noise
- Rapid and precise positioning.



P.51 ~ P.53

New Product Descriptions



A.P. Lock : SAPL Series


- Sungil **A**ccurate & **P**owerful Locking Device
- Product code 'SAP' was registered as the trademark at the Intellectual Property Office (Application number : 40-2011-0011919).
- Homogeneous mechanical property through stabilizing treatment
- Shaft-clamping force is improved by spreading special oil or grease on taper-shaped parts of A.P. Lock.
(S45C – operation oil #68, Electroless Nickel Plating – Fluorinated grease.)
- Bore tolerance is thoroughly controlled by all inspection.
- Shaft Clamping force and contact ratio was qualified in In-house Lab.

SAPL-A



S45C

SAPL-AS



Stainless

SAPL-AK



Electroless Nickel Plating

SAPL-B




S45C

SAPL-C



S45C

SAPL-CS



Stainless

SAPL-CK



Electroless Nickel Plating

SAPL-D1



S45C

SAPL-D2



S45C

SAPL-D3



S45C

SAPL-D4



S45C

SAPL-T



S45C

SAPL-R



S45C

SAPC



High Strength Aluminum Alloy


SAPA



High Strength Aluminum Alloy



Example

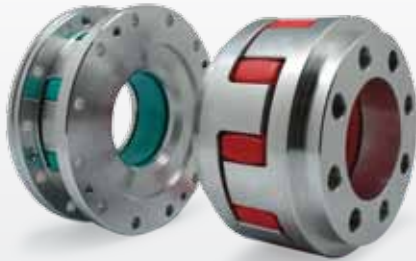

- Be released domestically first in Korea.
- Various Designed Hub can be supplied by order production (Please check the lead time)
- OD of Sleeve : 120, 135, 160

OD of Sleeve	Hardness	Rated Torque [kN]	Max. Torque [kN]
120	GR (Sh 98A)	620	1240
	RD (Sh 64D)	740	1480
135	GR (Sh 98A)	850	1700
	RD (Sh 64D)	1050	2100
160	GR (Sh 98A)	1700	3400
	RD (Sh 64D)	2100	4200

Figure of Sleeve




Connecting Shaft



- Two types of coupling are applied : Disk Type (SHDL), Jaw Type(SJCL)
- High precise straightness of middle long shaft
- Easy installation and disassembly
- Usage : Belt drive connection, Reducer Connection, Screw Jack System



Belt Drive Connection

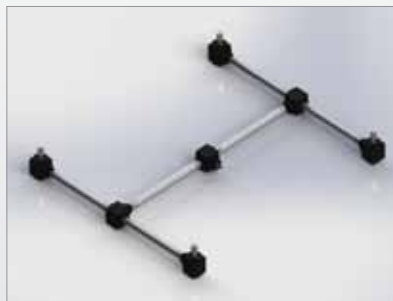

Up-Down Lifting System



SJCL Series



SHDL Series

Experiment equipments

Fracture/Slip Torque Testing Machine



- Specifications
 - torque : 0 ~ 500 Nm
 - speed : 5 ~ 200 rph
 - twist angle : 0 ~ 30°
 - exclusive SW
 - auto/manual
 - real time display/storage
- Use
 - testing slip torque
 - testing fracture torque
 - testing torsional rigidity
 - testing cyclic load lifespan

Coupling lifespan Testing Machine



- Specifications
 - torque : 0 ~ 100 Nm
 - max rpm : 11,000rpm
 - eccentricity : 0.0 ~ 3.0 mm
 - angular misalignment : 0.0 ~ 3.0°
 - axis displacement : 0.0 ~ 10 mm
- Use
 - testing lifespan with axial/parallel/angular misalignment
 - testing max rotation performance

Coupling Overshoot Testing Machine



- Specifications
 - acceleration time : 0.02 sec
 - max rpm : 6,000rpm
 - position resolution : 0.5 micron
 - possible load : 0 ~ 100kg
- Use
 - testing overshoot displacement
 - testing coupling performance at initial acceleration
 - testing accelerated-life

3-dimension Measuring Instrument



Rockwell Hardness Measuring Instrument




- Specifications
 - test load : 60, 100, 150Kgf
 - standard load : 10Kgf
 - max test height 210mm
 - product size : 200 x 150 x 720
- Use
 - product hardness test
 - heat treatment quality test

Resonant Frequency/Balancing Measuring Instrument



Resonant frequency measuring instrument



Balancing measuring instrument

Sungil utilize FEA to evaluate structure and dynamic performance for new or modified design and then verifies actual performance with in-house testing machine. Sungil cooperates with various institutes to improve and develop products. Sungil will do its best to improve quality and develop new products.

Intellectual Property

Patents



Industrial Designs



Trade Marks



Ultra-precision Coupling




Sungil Ultra-precision Coupling

Ultra-precision Coupling


Alignment Adjustment

- ① Flexible coupling can transmit torque and rotation angle by allowing misalignment. However, when the misalignment exceeds the permissible value, vibrations may occur and the life of the coupling may reduce shortly. Be sure to adjust the alignment.
- ② There are three types of shaft misalignments such as eccentricity (error in parallel alignment), angularity (error in angular alignment) and end-play (shift axle direction). Adjust the alignment to be lower than limit listed in the specification table of each product provided in this catalog.
- ③ The limit of misalignment indicated in this catalog is for when only one misalignment (eccentricity, angularity and end-play, respective) is taking place. When there are more than 2 misalignments, we recommend you to apply misalignment lower than 1/2 of the limits.
- ④ Misalignments are sometimes caused not only by equipment assembly but also by vibration, heat expansion, wear of bearings and so forth during operation. Therefore, it is recommended to adjust the shaft misalignment to be below 1/3 of maximum limit.


■ Parallel Offset Misalignment




■ Combination of parallel and angular offset misalignment

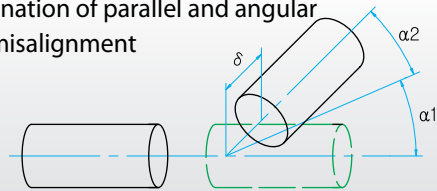


■ Angular misalignment (concentric)

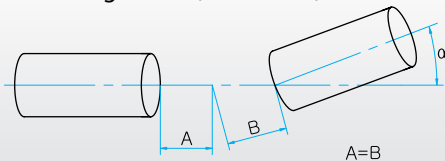


■ End-Play

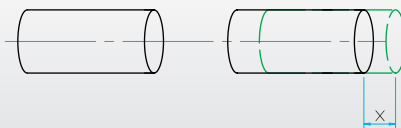

■ Angular misalignment (eccentric)

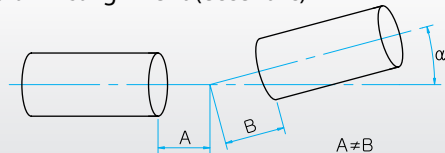

■ Run Out



Adjustment of Torque according to Temperature

SOH, SFC, SJC, and SHR use polyurethane, polyacetal, plastic parts or Anti-Vibration Rubber. These models must be used in the operational temperature indicated in this catalog.

When ambient temperature exceeds 30°, maximum torque and rated torque should be checked by the correction factor on the chart.

Ambient Temperature	Correction Factor
-20°C ~ 30°C	1.0
30°C ~ 40°C	0.8
40°C ~ 60°C	0.6
60°C ~ 100°C	0.5

Cautions

- Misalignment or torque exceeding maximum limit may reduce the life of a coupling due to plastic deformation.
- Stop the operation of a machine quickly when there is abnormal metallic noise, and check shaft misalignment and any disturbance in shaft rotation. After that, operate the machine again.
- When used in harsh condition such as significant load fluctuation, apply adhesive on screw to prevent loosening or select a larger size product.
- 'Rated Torque' is a torque that can be transferred continuously.
- 'Max Torque' is a torque that can be transferred momentarily at the moment of starting or reversing motion.
- Rate/ Maximum transferable torques have been determined without considering slip torque of the shaft. Slip torque is dependent on inner bore diameters.

Sungil Ultra-precision Coupling

Ultra-precision Coupling

Ways to Clamp Shafts



■ Set Screw Type

- A kind of common clamping type
- Shaft is easily damaged due to direct contact of clamping bolt to the shaft and the clamping force is weak
- Be vulnerable to vibration



■ Clamp Type

- Bore is contracted by tightening bolts and than shaft is clamped. .
- No shaft damage and better shaft clamping force than set screw type.



■ Clamp Split Type

- Be consist of two separate parts.
- No need to disassemble driven and driving parts for coupling installation (easy assembly)



■ Taper Type

- Excellent shaft clamping force
- Perfect symmetry and ideal balancing.



■ Keyway

- Traditional way to compensate clamping force of Set Screw, Clamp, and Clamp Split type
- Please check the recommended key size according to bore size

Shaft Clamping Way		SRB Series	SOH Series	SD Series	SHD Series	SRG Series	SCJ Series	SFC Series	SJC Series	SHR Series
Set Screw Type	Standard	O	O	O	O	O	O	O	O	X
	Key way	O	O	O	O	O	O	X	O	X
Clamp Type	Standard	O	O	O	O	O	O	X	O	O
	Key way	O	O	O	O	O	O	X	O	O
Taper Type	Standard	X	X	X	O	X	X	X	O	X
Clamp Split Type	Standard	X	X	▲	▲	▲	X	X	▲	O
	Key way	X	X	▲	▲	▲	X	X	▲	O

※ Keyway can be processed to all product models that have clamp type hubs

※ Set screw type is not available for SRBM, SOHM and SJCM.

※ Set screw type is not available for the Big sized SOH Series (15page)

※ Set screw type is not available for Stainless steel disk type. (SD□□S)

▲ For the SD Series, clamp split type is available only on cylindrical hub that's outer diameter is larger than or equal to $\phi 54$ (that is not available for the flange-shaped hub)



▲ The SHD's clamping hub for the split type has different structure from the normal SHD's clamp type hub. Please check the lead time when you order.

▲ Please check the lead time when you order semi or entire split type of SRG.

▲ Split type is available for SJC Series that's outer diameter is larger than or same to $\phi 30$ (For the outer diameter $\phi 30$, it is only available on SJC30-30C)

※Please check the lead time when you order clamp split type for the all kinds of product.

1/10 Taper Bushing

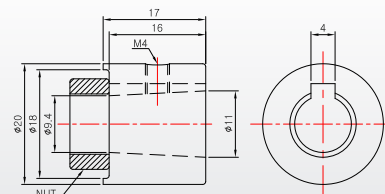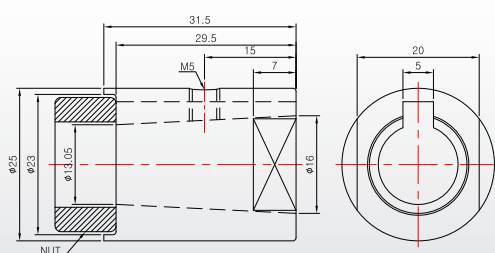


Sungil Ultra-precision Coupling


Ultra-precision Coupling

Standard Dimension of Keyway

Bore diameter	Dimension				Nominal Dimension (b x h)
	b		t		
	Basic Size	Tolerance	Basic Size	Tolerance	
ø8 ~ ø10	3	±0.0125	1.4	+0.1 0	3 x 3
ø10 ~ ø12	4	±0.015	1.8		4 x 4
ø12 ~ ø17	5		2.3		5 x 5
ø17 ~ ø22	6		2.8		6 x 6
ø22 ~ ø30	8	±0.018	3.3	+0.2 0	8 x 7
ø30 ~ ø38	10				10 x 8
ø38 ~ ø44	12	±0.0215	4.4		12 x 8
ø44 ~ ø50	14				14 x 9
ø50 ~ ø58	16				16 x 10
ø58 ~ ø65	18				18 x 11



Shaft Insertion Length

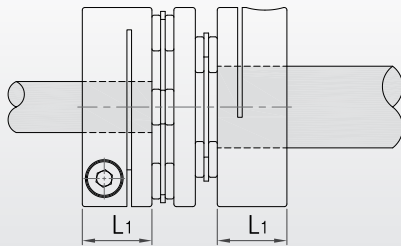

- The shaft insertion length that we recommend is 'L1' dimension listed within catalog chart for all kinds of catalog.
- If the length is too short, the slip can be easily occurred and the damage near side slot may be caused. On the other hand, If the length is too long, an internal interference or damage can be happened.

Customer Service

1. **Nickel plated bolts** or **stainless steel bolts** can be applied to all types of coupling products.
(Please mark the bolt type you want when you order)
2. It is available to order special bore size besides the standard listed on this catalog.
(Please contact to us. If the bore size that customer wants reduces product's performance or durability, the sized- product can not be offered.)
3. Please contact us when you ask special product that is not a standard. SUNG IL always do our best to develop new or special order product which customers need.

Compliance with RoHS & REACH



1. The most types of coupling of SUNGIL MACHINERY consist of harmless raw materials and are compliant with RoHS (except SCJ Series)
2. All types of coupling is compliant with REACH that is regulation of harmful chemicals from EU

SRB Series

Radial Beam Flexible Coupling




'SI. CO' mark(Trademark : 40-2012-0061376)indicates that the authenticity is certified.
'SRB' (Trademark : 40-2012-0044883) is the original trademark for SUNGIL's Radial Beam Coupling.

This product is a radial beam type flexible coupling that is made of high strength aluminum alloy(Al7075-T6) in one piece structure. Sungil machinery has maximized the advantage of the German VMT(Helical) Type and made up for the weak points.




Features


- Zero Backlash
- Body material: Al 7075-T6(High strength aluminum alloy), **Stainless steel**
- High Torsional Stiffness, High Permissible Torque
- Stability in high rotational speed
- Low moment of Inertia
- Excellent durability of oil and chemical resistance.

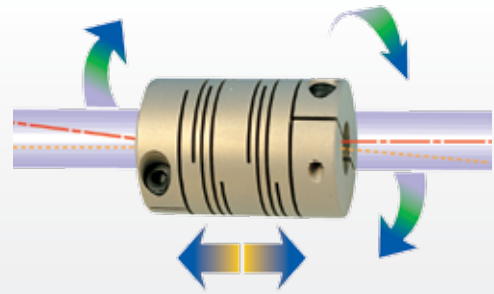

※ Registration of Design 30-027587



It becomes easy to assemble by processing the inside of coupling widely



Rounding(R) is machined at the end part of the slit of every Sungil Radial Beam Coupling. So it can avoid stress concentration and minimize the damage by parallel, angular misalignment.

-Registration of Design-

(※ A product that is not machined by rounding is not a Sungil(SI)'s Product)

Structure & Material

SRB Type



Clamp Type



Set Screw Type

Type	SRB-□□	SRB-□□C	SRBS-□□	SRBS-□□C
Fastening Type	Set Screw	Clamp	Set Screw	Clamp
Material	High strength aluminum alloy (Al 7075-T6)		Stainless Steel	
Surface Treatment	Alumite		-	

SRBM Type



Clamp Type




Set Screw Type

Type	SRBM-□□	SRBM-□□C	SRBMS-□□C
Fastening Type	Set Screw	Clamp	Clamp
Material	High strength aluminum alloy (Al 7075-T6)		Stainless Steel
Surface Treatment	Alumite		-

※ Surface treatment is not processed for SRB-8 products.


How to order product

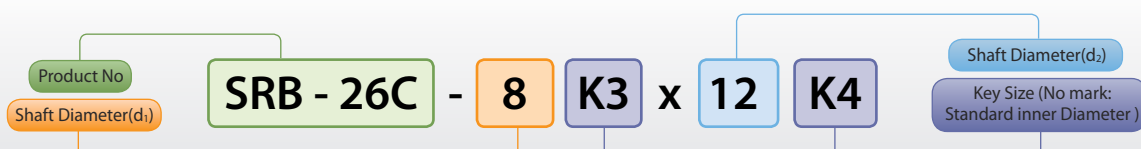

※ Please mark each inner diameter size.

SRB Series Radial Beam Flexible Coupling

Please, download CAD DATA from www.sungilfa.com

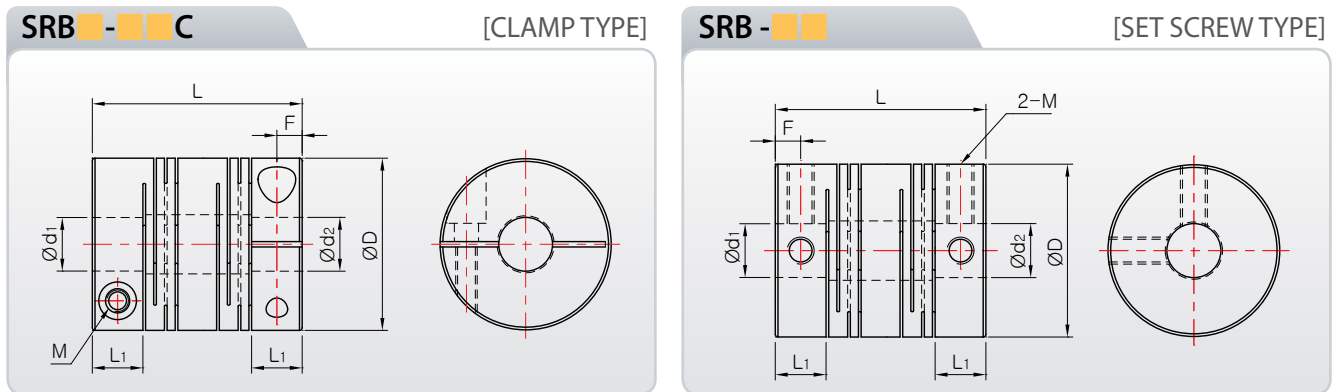

Dimensions & Performance

※ Material : High strength aluminum alloy (Al 7075-T6)

Product Number	Dimension (mm) (±0.3)				Fastening Bolt M	Fastening Torque (N·m)	Max-RPM (min-1)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SRB-12C	12.7	19	5	2.5	M2	0.5	35,000	0.4	0.2	40	1.05 × 10 ⁻⁷	4.4	2.5	0.1	±0.3
SRB-16C	16	21.5	6.05	3	M2.6	1	27,000	0.8	0.4	75	3.1 × 10 ⁻⁷	8.2	2.5	0.15	±0.3
SRB-19C	19.1	23	6.16	3.05	M2.6	1	20,000	1.2	0.6	150	6.4 × 10 ⁻⁷	12	2.5	0.15	±0.3
SRB-22C	22.2	26.5	7.15	3.55	M3	1.7	18,000	2.0	1.0	200	1.4 × 10 ⁻⁶	17.9	2.5	0.15	±0.4
SRB-26C	26.2	31.5	7.48	3.7	M3	1.7	17,000	4	2	340	3.16 × 10 ⁻⁶	29.9	2.5	0.2	±0.4
SRBA-32C	31.8	39	9.4	4.65	M4	3.5	14,000	7.6	3.8	450	8.61 × 10 ⁻⁶	54.9	2.5	0.2	±0.4
SRBB-32C	31.8	44	9.4	4.65	M4	3.5	14,000	7.6	3.8	450	1.0 × 10 ⁻⁵	62.3	2.5	0.2	±0.4
SRBA-39C	39	43	10.74	5.3	M5	8	10,000	14	7	640	2.1 × 10 ⁻⁵	87.8	2.5	0.25	±0.4
SRBB-39C	39	56	12.04	5.45	M5	8	10,000	14	7	640	2.79 × 10 ⁻⁵	117	2.5	0.25	±0.4
SRBA-49C	49	63.5	15.05	7.5	M6	13	10,000	30	15	1,500	8.35 × 10 ⁻⁵	236	2.5	0.25	±0.5
SRBB-49C	49	70	14.5	7.2	M6	13	8,400	30	15	1,500	1.0 × 10 ⁻⁴	258	2.5	0.25	±0.5
SRBA-60C	60	76.2	19	9.35	M8	30	7,000	60	30	2,500	2.17 × 10 ⁻⁴	407	2.5	0.25	±0.5
SRBB-60C	60	88	19	9.35	M8	30	7,000	60	30	2,500	2.58 × 10 ⁻⁴	483	2.5	0.25	±0.5
new SRB-8	7.9	14	3.5	1.7	M2	0.3	50,000	0.2	0.1	16	1.2 × 10 ⁻⁸	1.5	2.5	0.1	±0.2
SRB-12	12.7	18	4.5	2.15	M2.5	0.5	40,000	0.4	0.2	40	1.04 × 10 ⁻⁷	4.4	2.5	0.1	±0.3
SRB-16	16	18.5	4.7	2.3	M3	0.7	30,000	0.8	0.4	75	2.8 × 10 ⁻⁷	7.2	2.5	0.15	±0.3
SRB-19	19.1	22	5.96	2.9	M3	0.7	24,000	1.2	0.6	150	6.4 × 10 ⁻⁷	12	2.5	0.15	±0.3
SRB-22	22.2	25	6.5	3.2	M4	1.7	20,000	2.0	1.0	200	1.4 × 10 ⁻⁶	17.4	2.5	0.15	±0.4
SRB-26	26.2	30	7.73	3.4	M4	1.7	18,000	4	2	340	3.1 × 10 ⁻⁶	29.2	2.5	0.2	±0.4
SRB-32	31.8	39	9.4	4.7	M5	4	18,000	7.6	3.8	450	9.4 × 10 ⁻⁶	56.8	2.5	0.2	±0.4
SRB-39	39	56	16.04	5.9	M5	4	12,000	14	7	640	2.8 × 10 ⁻⁵	124	2.5	0.25	±0.4
SRB-49	49	70	19.75	9.4	M6	7	10,000	30	15	1,500	1.0 × 10 ⁻⁴	280	2.5	0.25	±0.5
SRB-60	60	88	19	9	M8	15	8,500	60	30	2,500	2.67 × 10 ⁻⁴	500	2.5	0.3	±0.5

* Mass and mass moment of inertia are measured with max. bore size ※ One(1) locking bolt is included in SRB-8 products.



Standard Inner diameter

Product Number	Standard Inner Diameter(d ₁ , d ₂ , unit:mm)																			
	Ø2	Ø3	Ø4	Ø5	Ø6	Ø6.35	Ø8	Ø9.525	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25
SRB-8 □	●	●																		
SRB-12 □		●	●	●																
SRB-16 □		●	●	●	●															
SRB-19 □			●	●	●	●	●													
SRB-22 □				●	●	●	●	●	●											
SRB-26 □				●	●	●	●	●	●	●										
SRB □ -32 □							●	●	●	●	●	●								
SRB □ -39 □								●	●	●	●	●	●	●	●	●				
SRB □ -49 □									●	●	●	●	●	●	●	●	●	●		
SRB □ -60 □										●	●	●	●	●	●	●	●	●	●	●

- For the inner diameter, INCH type is available
- Nonstandard inner diameter is also available
- Keyway is available
- The recommendation for shaft tolerance is h7.

SRB Series

Radial Beam Flexible Coupling

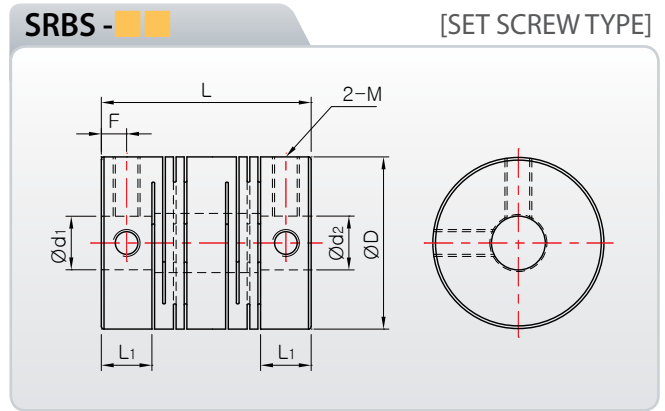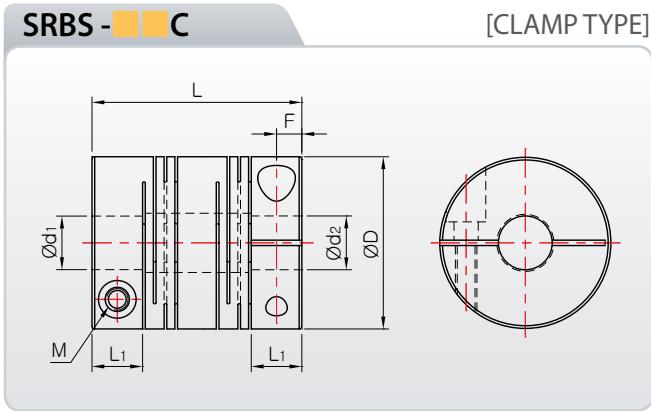

Dimensions & Performance

※ Material : Stainless Steel

Product Number	Dimension (mm) (±0.3)				Fastening Bolt M	Fastening Torque (N·m)	Max·RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SRBS-12C	12.7	19	5	2.5	M2	0.5	32,000	0.6	0.3	65	3.0 × 10 ⁻⁷	13	2.5	0.1	±0.3
SRBS-16C	16	21.5	6.05	3	M2.6	1	25,000	1	0.5	85	9.0 × 10 ⁻⁷	26	2.5	0.15	±0.3
SRBS-19C	19.1	23	6.16	3.05	M2.6	1	18,000	1.8	0.9	230	1.7 × 10 ⁻⁶	32	2.5	0.15	±0.3
SRBS-22C	22.2	26.5	7.15	3.55	M3	1.5	15,000	3.2	1.6	290	3.8 × 10 ⁻⁶	43	2.5	0.15	±0.4
SRBS-26C	26.2	31.5	7.48	3.7	M3	1.5	14,000	4.2	2.1	350	8.6 × 10 ⁻⁶	84	2.5	0.2	±0.4
SRBS-32C	31.8	39	9.4	4.65	M4	2.5	12,000	7.6	3.8	840	2.5 × 10 ⁻⁵	160	2.5	0.2	±0.4
SRBAS-39C	39	43	10.74	5.3	M5	4	9,000	16	8	1,200	6.1 × 10 ⁻⁵	280	2.5	0.25	±0.4
SRBBS-39C	39	56	12.04	5.45	M5	4	9,000	16	8	1,000	8.6 × 10 ⁻⁵	360	2.5	0.25	±0.4
SRBAS-49C	49	63.5	15.05	7.5	M6	8	7,000	32	16	1,600	2.7 × 10 ⁻⁴	672	2.5	0.25	±0.5
SRBBS-49C	49	70	14.5	7.2	M6	8	7,000	32	16	1,400	2.8 × 10 ⁻⁴	740	2.5	0.25	±0.5
SRBAS-60C	60	76.2	19	9.35	M8	16	5,000	60	30	2,000	7.2 × 10 ⁻⁴	1,150	2.5	0.25	±0.5
SRBBS-60C	60	88	19	9.35	M8	16	5,000	60	30	1,800	8.6 × 10 ⁻⁴	1,370	2.5	0.25	±0.5
SRBS-12	12.7	18	4.5	2.15	M2.5	0.5	34,000	0.6	0.3	65	3.0 × 10 ⁻⁷	12.4	2.5	0.1	±0.3
SRBS-16	16	18.5	4.7	2.3	M3	0.7	27,000	1	0.5	85	7.7 × 10 ⁻⁷	21	2.5	0.15	±0.3
SRBS-19	19.1	22	5.94	2.9	M3	0.7	20,000	1.8	0.9	230	1.8 × 10 ⁻⁶	34	2.5	0.15	±0.3
SRBS-22	22.2	25	6.5	3.2	M4	1.5	17,000	3.2	1.6	290	3.8 × 10 ⁻⁶	49.5	2.5	0.15	±0.4
SRBS-26	26.2	30	7.73	3.4	M4	1.5	16,000	4.2	2.1	350	8.8 × 10 ⁻⁶	84	2.5	0.2	±0.4
SRBS-32	31.8	39	9.4	4.7	M5	2	14,000	7.6	3.8	840	2.7 × 10 ⁻⁵	160	2.5	0.2	±0.4
SRBS-39	39	56	16.04	5.9	M5	2	10,000	16	8	1,000	8.8 × 10 ⁻⁵	388	2.5	0.25	±0.4
SRBS-49	49	70	19.75	9.4	M6	4	7,000	32	16	1,400	2.8 × 10 ⁻⁴	775	2.5	0.25	±0.5
SRBS-60	60	88	19	9	M8	8	6,000	60	30	1,800	7.6 × 10 ⁻⁴	1,416	2.5	0.3	±0.5


* SRB-60 Series 납기는 당사로 문의 바랍니다. * 질량 및 관성모멘트는 최대 내경을 기준으로 산정되었습니다.

Standard Inner diameter


Product Number	Standard Inner Diameter(d ₁ , d ₂ , unit:mm)							
SRBS-12□	3×3	3×4	4×4	4×5	4.5×5	5×5		
SRBS-16□	3×3	4×4	4×5	4×6	4.5×5	4.5×6	5×5	5×6
	6×6							
SRBS-19□	4×4	4×5	5×5	5×6	5×8	6×6	6×6.35	6×8
	6.35×8	8×8						
SRBS-22□	5×5	5×6	6×6	6×6.35	6×8	6×10	6.35×8	6.35×10
	8×8	8×9.525	8×10	10×10				
SRBS-26□	5×5	6×6	6×6.35	6×8	6×10	6.35×8	6.35×10	8×8
	8×9.525	8×10	10×10	10×12	12×12			
SRBS-32□	6×6	6×8	6×10	6.35×8	8×8	8×9.525	8×10	8×12
	10×10	10×12	10×14	12×12	12×14	14×14	15×15	
SRBS-39□	8×8	10×10	10×12	10×14	12×12	14×14	15×15	16×16
SRBS-49□	12×14	14×14	14×16	15×15	16×16	18×18	20×20	
SRBS-60□	15×15	16×16	18×18	20×20	22×22	24×24	25×25	

SRB Series Radial Beam Flexible Coupling


Please, download CAD DATA from www.sungilfa.com

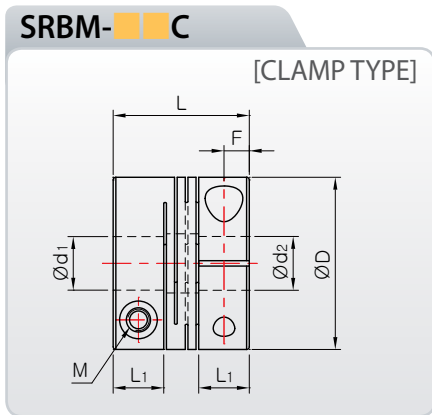

※ Material : High strength aluminum alloy (Al 7075-T6)

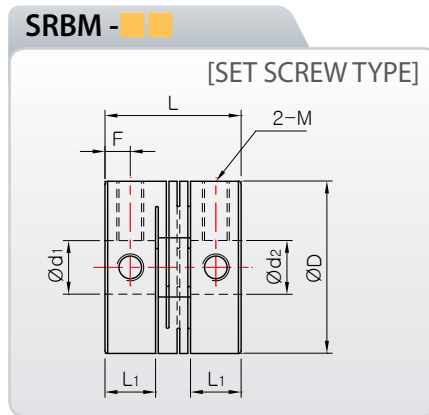

※ Material : High strength aluminum alloy (Al 7075-T6)

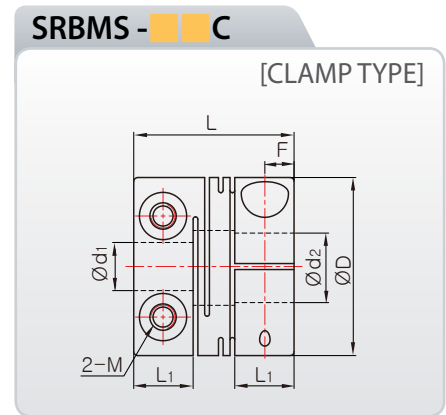

※ Material : Stainless steel

Dimensions & Performance

Product Number	Dimension (mm) (±0.3)				Fastening Bolt M	Fastening Torque (N·m)	Max. RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SRBM-12C	12.7	14	5	2.5	M2	0.5	35,000	0.4	0.2	60	7.88×10 ⁻⁸	3.2	1	0	±0.15
SRBM-16C	16	16	6	2.95	M2.6	1	27,000	0.8	0.4	130	2.3×10 ⁻⁷	6.3	1	0	±0.15
SRBM-19C	19.1	17	6.31	3.1	M2.6	1	20,000	1.2	0.6	160	5.0×10 ⁻⁷	9.2	1	0	±0.15
SRBM-22C	22.2	20	7.4	3.65	M3	1.7	18,000	2.0	1.0	180	1.1×10 ⁻⁶	15	1	0	±0.15
SRBM-26C	26.2	23	8.4	4.1	M3	1.7	17,000	4.0	2.0	480	2.5×10 ⁻⁶	25	1	0	±0.15
SRBM-32C	31.8	30	11	5.4	M4	3.5	14,000	7.6	3.8	780	6.84×10 ⁻⁶	44	1	0	±0.15
SRBMS-12C	12.7	14	5	2.5	M2	0.5	20,000	0.6	0.3	120	2.4×10 ⁻⁷	10	1	0	±0.15
SRBMS-16C	16	16	6	2.95	M2.6	1	20,000	1.0	0.5	240	7.0×10 ⁻⁷	20	1	0	±0.15
SRBMS-19C	19.1	17	6.31	3.1	M2.6	1	19,000	1.8	0.9	300	1.5×10 ⁻⁶	32	1	0	±0.15
SRBMS-22C	22.2	20	7.4	3.65	M3	1.5	17,000	3.2	1.6	350	3.1×10 ⁻⁶	42	1	0	±0.15
SRBMS-26C	26.2	23	8.4	4.1	M3	1.5	15,000	4.2	2.1	720	7.2×10 ⁻⁶	70	1	0	±0.15
SRBMS-32C	31.8	30	11	5.4	M4	2.5	10,000	7.6	3.8	1,300	2.0×10 ⁻⁵	140	1	0	±0.15
SRBM-12	12.7	13	4.5	2.2	M2.5	0.5	40,000	0.4	0.2	60	7.89×10 ⁻⁸	3.2	1	0	±0.15
SRBM-16	16	14	5.0	2.4	M3	0.7	30,000	0.8	0.4	130	2.15×10 ⁻⁷	5.8	1	0	±0.15
SRBM-19	19.1	17	6.31	3.1	M3	0.7	24,000	1.2	0.6	160	5.34×10 ⁻⁷	10	1	0	±0.15
SRBM-22	22.2	19	6.9	3.3	M4	1.7	20,000	2.0	1.0	180	1.1×10 ⁻⁶	14	1	0	±0.15
SRBM-26	26.2	22	7.9	3.8	M4	1.7	18,000	4.0	2.0	480	2.5×10 ⁻⁶	25	1	0	±0.15
SRBM-32	31.8	29	10.5	5.1	M5	4	16,000	7.6	3.8	780	6.94×10 ⁻⁶	44.9	1	0	±0.15

* Mass and mass moment of inertia are measured with max. bore size

Standard Inner diameter

Product Number	Standard Inner Diameter(d ₁ , d ₂ , unit:mm)												
	Ø2	Ø3	Ø4	Ø5	Ø6	Ø6.35	Ø8	Ø9.525	Ø10	Ø11	Ø12	Ø14	Ø15
SRBM(S)-12□		●	●	●									
SRBM(S)-16□		●	●	●	●								
SRBM(S)-19□			●	●	●	●	●						
SRBM(S)-22□				●	●	●	●	●	●				
SRBM(S)-26□				●	●	●	●	●	●	●	●		
SRBM(S)-32□					●	●	●	●	●	●	●	●	●

■ For the inner diameter, INCH type is available
■ The recommendation for shaft tolerance is h7.

■ Nonstandard inner diameter is also available

■ Keyway is available

SOH Series

Oldham Coupling




'SI.CO' mark(Trademark : 40-2012-0061376) indicates that the authenticity is certified.
 'SOH' (Trademark : 40-2012-0044882) is the original trademark for SUNGIL's Oldham Coupling.

The major characteristic of OLDHAM COUPLING is excellent flexibility and wide range of parallel misalignment acceptability. Since there is no restoring force, there is little weight(load) on the bearing and shaft. Torque is transferred through a disk that is capable of accepting misalignment error and mechanical intermittence. However, excessive load can damage the disk. Replacement of a disk is easy without disassembling the hub from the shaft.




Features


- Superior performance absorbing parallel and angular misalignment (the middle disk's slip and the hub's rounding effect)
- Easy to assemble and replace
- Minimizes the load on the shaft under misalignment
- Electrical insulation
- Minimizes backlash by pre-loaded assembly

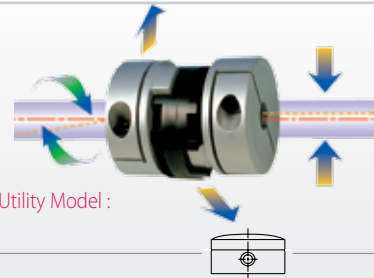

Traditional Oldham Type




Sungil Oldham Type




When there is an angular misalignment, the conventional OLDHAM couplings encounter bending moment on the outer diameter which leads to a bending moment on the shaft. However, since SUNGIL OLDHAM coupling is featured after being machined in micro rounding process, it can accept angular misalignment. Also, it reduces the load on the shaft and transmits torque constantly.

Proper installation of OLDHAM COUPLING

- It should be avoid to install with relatively long driven/driving shaft from bearing supports and proper bearing shaft is necessary.
- OLDHAM coupling is inadequate for connecting fluctuating shafts or being used in pair.




Right Use




Wrong Use


Misalignment



Permissible Parallel Misalignment : \pm mm



Permissible Angular Misalignment : \pm °



Permissible End-play : \pm mm

Application

- X-Y Position Table
- Suitable for small sized motor such as AC motor, DC motor, and Servo motor
- Hydraulic distribution system and optical instrument
- Ventilation equipment, environmental equipment
- Encoder
- Transferring equipment of Paper, disk, tape transporting device


Structure & Material



※ Surface treatment (Alumite) is not processed on hubs for SOH-6, 8, 10, 12, 12C.
 ※ White-colored disk is inserted for SOH-6, 8, 10, 12. (The material is same polyacetal as black-colored disk.)

SOH Series Oldham Coupling

Please, download CAD DATA from www.sungilfa.com

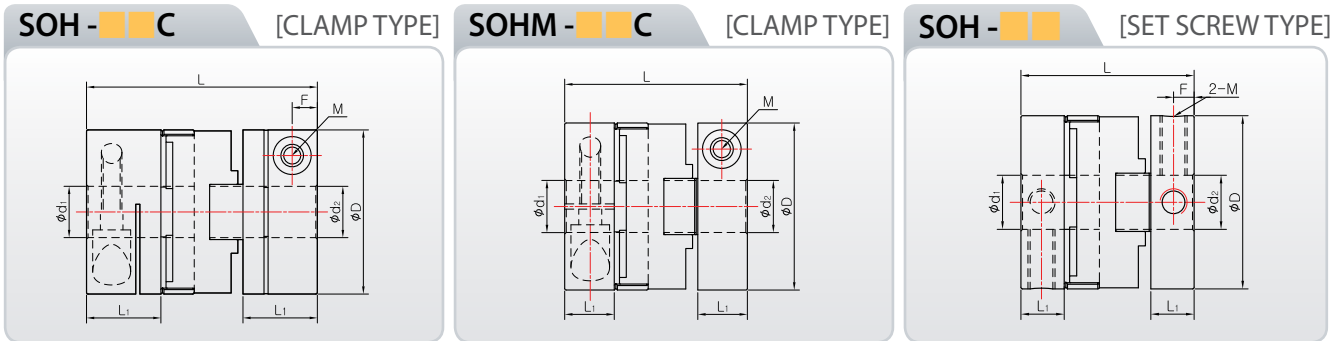

Dimensions & Performance


Product Number	Dimension (mm) (±0.3)				Fastening Bolt	Fastening Torque	Max-RPM	Max Torque	Rated Torque	Torsional Stiffness	Moment of Inertia	Mass	Permissible Misalignment		
													Angle	Parallel	End-Play
SOH-16C	16	23.9	7.7	2.7	M2.6	1	13,000	2	1	65	3.07×10^{-7}	8.5	1.5	1	0.1
SOH-20C	20	25.7	8	2.8	M2.6	1	11,000	3	1.5	120	8.16×10^{-7}	14.2	1.5	1.5	0.1
SOH-25C	25.5	32	10.2	3.5	M3	1.7	10,000	5	2.5	200	2.71×10^{-6}	29.3	1.5	2	0.1
SOH-32C	32	44.7	14.4	4.9	M4	3.5	9,000	14	7	620	9.18×10^{-6}	59.6	1.5	2.5	0.15
SOH-43C	43	52	16.5	5.8	M5	8	8,000	25	12.5	1,200	3.4×10^{-5}	127.1	1.5	3.0	0.15
SOH-53C	53	58.3	19.5	6.3	M5	8	7,000	40	20	1,400	9.1×10^{-5}	217	1.5	3.2	0.2
SOH-57C	57	76.2	26.9	7.7	M6	13	6,000	68	34	2,600	1.6×10^{-4}	329	1.5	3.5	0.2
SOHM-12C	11.9	16.5	5	2.5	M2	0.5	15,000	1.8	0.9	55	7.4×10^{-8}	3.5	1.5	1	0.05
SOHM-16C	16	20.7	6.1	3	M2.6	1	13,000	2	1	65	2.6×10^{-7}	7.4	1.5	1	0.1
SOHM-20C	20	21.9	6.1	2.9	M2.6	1	11,000	3	1.5	120	6.8×10^{-7}	12	1.5	1.5	0.1
SOHM-25C	25.5	26.4	7.4	3.7	M3	1.7	10,000	5	2.5	200	2.2×10^{-6}	23	1.5	2	0.1
SOHM-32C	32	34.9	9.5	4.7	M4	3.5	9,000	14	7	620	6.8×10^{-6}	44	1.5	2.5	0.2
SOHM-43C	43	47	14.7	7.3	M5	8	8,000	25	12.5	1,200	3.0×10^{-5}	114	1.5	3.0	0.15
SOHM-53C	53	53.1	16.9	8.3	M5	8	7,400	40	20	1,400	8.3×10^{-5}	197	1.5	3.2	0.15
SOHM-57C	57	56.8	18	8.7	M6	13	6,000	68	34	2,600	1.2×10^{-4}	232	1.5	3.5	0.2
SOHM-70C	73	75.5	25	12.3	M8	30	4,500	120	60	4,800	4.5×10^{-4}	547	1.5	3.5	0.2
SOH-6	5.9	8.4	2.5	1.25	M2	0.3	22,000	0.4	0.2	5	2.5×10^{-9}	0.5	1.5	0.5	0.05
SOH-8	7.9	9.8	2.5	1.25	M2	0.3	20,000	1	0.5	10	8.4×10^{-9}	0.9	1.5	0.7	0.05
SOH-10	9.9	10.4	2.9	1.5	M2	0.3	18,000	1.4	0.7	25	2.4×10^{-8}	1.7	1.5	0.9	0.05
SOH-12	11.9	14.5	3.9	2	M3	0.7	15,000	1.8	0.9	55	6.3×10^{-8}	3	1.5	1	0.05
SOH-16	16	17.9	4.7	2.2	M3	0.7	13,000	2	1	65	2.4×10^{-7}	7	1.5	1	0.1
SOH-20	20	19.9	5.1	2.4	M4	1.7	11,000	3	1.5	120	6.4×10^{-7}	12	1.5	1.5	0.1
SOH-25	25.5	25.4	6.9	3.1	M4	1.7	10,000	5	2.5	200	2.2×10^{-6}	24	1.5	2	0.1
SOH-32	32	31.9	8	3.8	M5	4	9,000	14	7	620	6.3×10^{-6}	41	1.5	2.5	0.2
SOH-43	43	52	16.5	7.1	M5	4	8,000	25	12.5	1,200	3.7×10^{-5}	135	1.5	3.0	0.15
SOH-53	53	58.3	19.5	7.5	M6	7	7,000	40	20	1,400	1.0×10^{-4}	228	1.5	3.2	0.15
SOH-57	57	76.2	26.9	9.9	M8	15	6,000	68	34	2,600	1.8×10^{-4}	345	1.5	3.5	0.2
SOH-70	73	75.5	25	12.2	M8	15	4,500	120	60	4,800	4.5×10^{-4}	567	1.5	3.5	0.2

* Mass and mass moment of inertia are measured with max. bore size

※ SOH-16 and SOH-20 have different number of tightening bolts according to inner bore sizes (1ea or 2ea)

※ One(1) locking bolt is included in SOH6, 8 products.

How to order product

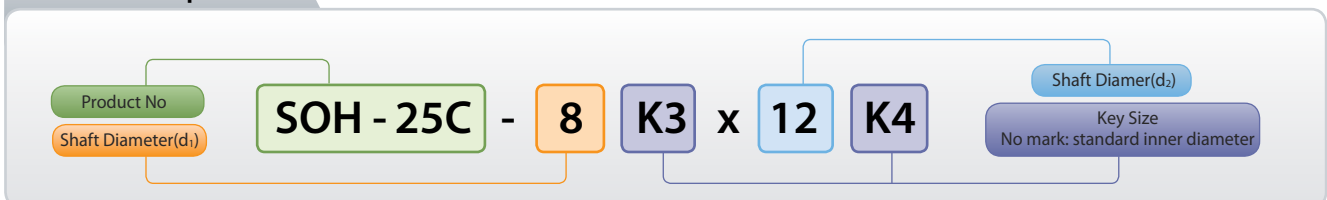


※ Please mark each inner diameter size.

※ When you order 'penetration type', please mark 'penetration-type'


SOH Series

Oldham Coupling


SOH-■■■S [SET SCREW TYPE]



SOH-■■■SC [COMPLEX TYPE]



SOH-■■■SS [SET SCREW TYPE]



Dimensions & Performance

Product Number	Dimension (mm) (±0.3)						Fastening Torque (N·m)	Fastening Torque (N·m)	Max. RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	L	L ₁	L ₂	F ₁	F ₂									Angle (°)	Parallel (mm)	End-Play (mm)
SOH-16S	16	20.9	4.7	7.7	2.2	3.8	M3	0.7	13,000	2	1	65	2.7 × 10 ⁻⁷	7.9	1.5	1	0.1
SOH-20S	20	22.8	5.1	8	2.4	3.6	M4	1.7	11,000	3	1.5	120	7.5 × 10 ⁻⁷	13	1.5	1.5	0.1
SOH-25S	25.5	28.7	6.9	10.2	3.1	4.9	M4	1.7	10,000	5	2.5	200	2.6 × 10 ⁻⁶	27.2	1.5	2	0.1
SOH-32S	32	38.3	8	14.4	3.8	5.5	M5	4	9,000	14	7	620	8.1 × 10 ⁻⁶	52	1.5	2.5	0.2
SOH-16SC	16	20.9	4.7	7.7	2.2	2.7	M3/M2.6	0.7/1	13,000	2	1	65	2.9 × 10 ⁻⁷	7.5	1.5	1	0.1
SOH-20SC	20	22.8	5.1	8	2.4	2.8	M4/M2.6	1.7/1	11,000	3	1.5	120	7.2 × 10 ⁻⁷	12.6	1.5	1.5	0.1
SOH-25SC	25.5	28.7	6.9	10.2	3.1	3.5	M4/M3	1.7/1.7	10,000	5	2.5	200	2.6 × 10 ⁻⁶	26	1.5	2	0.1
SOH-32SC	32	38.3	8	14.4	3.8	4.9	M5/M4	4/3.5	9,000	14	7	620	7.8 × 10 ⁻⁶	50.3	1.5	2.5	0.2
new SOH-8SS	7.9	12.6	4.6	4.6	2.3	2.3	M3	0.7	20,000	1	0.5	10	1.3 × 10 ⁻⁸	1.5	1.5	0.7	0.05
SOH-16SS	16	23.9	7.7	7.7	3.8	3.8	M3	0.7	13,000	2	1	65	3.4 × 10 ⁻⁷	9.3	1.5	1	0.1
SOH-20SS	20	25.7	8	8	3.6	3.6	M4	1.7	11,000	3	1.5	120	8.9 × 10 ⁻⁷	15	1.5	1.5	0.1
SOH-25SS	25.5	32	10.2	10.2	4.9	4.9	M4	1.7	10,000	5	2.5	200	2.9 × 10 ⁻⁶	31	1.5	2	0.1
SOH-32SS	32	44.7	14.4	14.4	5.5	5.5	M5	4	9,000	14	7	620	9.5 × 10 ⁻⁶	63	1.5	2.5	0.2

* Mass and mass moment of inertia are measured with max. bore size

* SOH-□□SC-d1 (set screw hub) x d2(clamp type hub) * SOH-□□S-d1 (shorter set screw hub) x d2(longer set screw hub)
 (the order of inner bore size is important)

Standard Inner diameter

제품번호	표준 내경 (d ₁ , d ₂) Standard INNER Diameter (mm)																													
	1	1.5	2	2.5	3	4	4.5	5	6	6.35	8	9.525	10	11	12	14	15	16	18	19	20	22	24	25	25.4	28	30	32	35	40
SOH□-6□□	●	●	●																											
SOH□-8□□	●		●	●																										
SOH□-10□□			●	●	●																									
SOH□-12□□				●	●	●	●																							
SOH□-16□□					●	●	●	●	●																					
SOH□-20□□						●	●	●	●	●																				
SOH□-25□□							●	●	●	●	●																			
SOH□-32□□								●	●	●	●	●																		
SOH□-43□□									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SOH□-53□□										●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SOH□-57□□											●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SOH□-70□□												●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

- For the inner diameter, INCH type is available
- Keyway is available
- The recommendation for shaft tolerance is h7.
- Nonstandard inner diameter is also available
- For the * inner bore, the shaft cannot penetrate through a spacer.
- The following is the size of the inner diameter of penetration-type spacer (SOH-16 =ø7.7, SOH-20 =ø10.7, SOH-25 =ø14.5, SOH-32 =ø16.5, SOH-43 =ø21.7, SOH-53 =ø25.7, SOH-70 =ø35.3)

SOH-■■■



SOH-■■■SC



SOH-■■■S



SOH-■■■SS



SOH Series

SOH Big Series Oldham Coupling


Please, download CAD DATA from www.sungilfa.com

특징

- Allowable Inner Diameter Size: $\varnothing 15 \sim \varnothing 60$
- High permissible torque, High torsional stiffness
- High Absorptivity of misalignment
- Excellent fastening due to double clamping
- Excellent balancing due to perfect bilateral symmetry



※ Registration of Design : 30-0593190-4

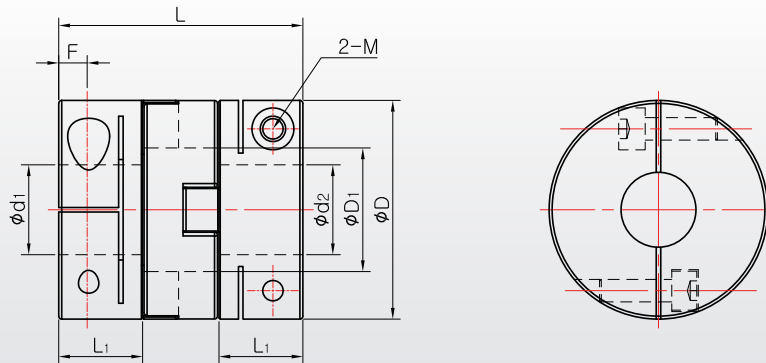

The following is the size of the inner diameter of penetration-type spacer
Please refer to this when ordering key-type or penetration type.

- SOH-70C = $\varnothing 35.3$
- SOH-90C = $\varnothing 40.5$
- SOH-120C = $\varnothing 50.5$

Dimensions & Performance

Product Number	Dimension (mm) (± 0.3)					Fastening Bolt M	Fastening Torque (N·m)	Max·RPM (min^{-1})	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia ($\text{kg}\cdot\text{m}^2$)	Mass (g)	Permissible Misalignment		
	D	D ₁	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SOH-70C	73	35.3	81.5	28	10	M8	30	4,500	130	65	2,000	5.4×10^{-4}	670	1.5	3.5	0.3
SOH-90C	88	40.5	97	33.5	12	M10	50	4,500	210	105	2,500	1.2×10^{-3}	1240	1.5	4	0.35
SOH-120C	118	50.5	138	40.5	13	M12	90	3,500	400	200	6,300	6.5×10^{-3}	2600	1.5	4.5	0.4

* Mass and mass moment of inertia are measured with max. bore size

Permissible Misalignment

Product Number	Standard Inner Diameter(d ₁ , d ₂ unit:mm)																					
	$\varnothing 15$	$\varnothing 16$	$\varnothing 18$	$\varnothing 19$	$\varnothing 20$	$\varnothing 22$	$\varnothing 24$	$\varnothing 25$	$\varnothing 28$	$\varnothing 30$	$\varnothing 32$	$\varnothing 34$	$\varnothing 35$	$\varnothing 40$	$\varnothing 42$	$\varnothing 45$	$\varnothing 50$	$\varnothing 52$	$\varnothing 55$	$\varnothing 58$	$\varnothing 60$	
SOH-70C	●	●	●	●	●	●	●	●	●	●	●	●	●	●								
SOH-90C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
SOH-120C								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

- For the inner diameter, INCH type is available
- Nonstandard inner diameter is also available
- Keyway is available
- The recommendation for shaft tolerance is h7.

SD Series

Zero Backlash Disk Coupling


'SI. CO' mark(Trademark : 40-2012-0061376) indicates that the authenticity is certified.
 'SDS, SDW'(Trademark : 40-2012-0044877, 0044876) is the original trademark for SUNGIL's Disk Coupling.

SUNGIL's DISK COUPLING has large torsional stiffness and zero backlash, and it is a highly precise coupling that has a infinite life. SUNGIL's DISK COUPLING can rotate with high speed in uni-direction or bi-directions and is used mainly in high-precision measuring equipments, high speed movement control systems, dynamometer, precision encoder and so forth.




Features

- Absorbs misalignment by plat spring (Single disk type cannot accept parallel misalignment)
- High torsional stiffness
- Zero backlash
- Semi-permanent life time
- Identical clockwise and counter-clockwise rotational characteristics
- Low moment of inertia
- Accurate and fast response performance
- 2 types: Single disk, Double disk
- Assembly of Disk Coupling with stainless steel component(bolt, collar) is available(please contact us)

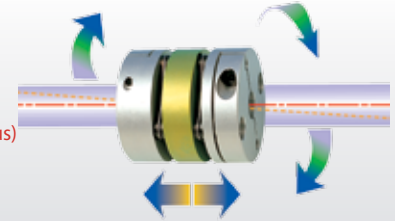

※ Patent application : 10-2012-0057200

Allowance for Parallel misalignment when applying midde shaft

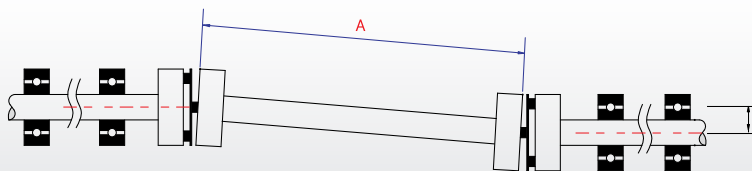


Allowance for parallel misalignment B

$$B = A \times \sin \theta$$

A : Fluctuating shaft length

θ : Allowance for Angular misalignment of Coupling


Misalignment

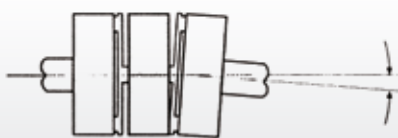

Angular Misalignment : \pm °



Parallel Misalignment : \pm mm



End-Play : \pm mm

Application


- Servo motor, Stepping Motor
- Encoder for high precision
- High speed & precise position controlling system
- X-Y positioning, Linear Robot

Structure & Material

Disk : Stainless steel

Middle Plate:
High strength aluminum
Surface treatment:
Alumite

Hub: High strength aluminum
Surface treatment: Alumite



Clamping : SCM435
(Stainless bolts are available)




How to order product



- ※ Please mark each inner diameter size.
- ※ It is impossible to ask for additional keyways and change inner diameter size after ordering.
- ※ Do not disassemble because each part is assembled in an optimized position.
- ※ The clamp split hub can be applied to SDWB,C-54CW, SD□□-64CW(cylindrical hub), SD□□-80CW, SD□□-90CW and SD□□-100CW.)

SD Series Zero Backlash Disk Coupling



Please, download CAD DATA from www.sungilfa.com

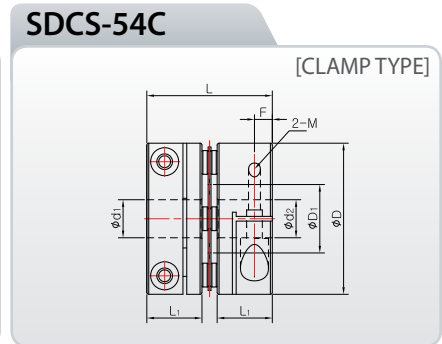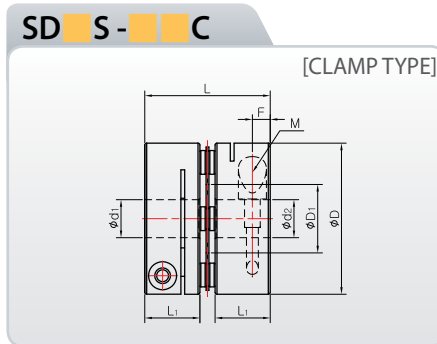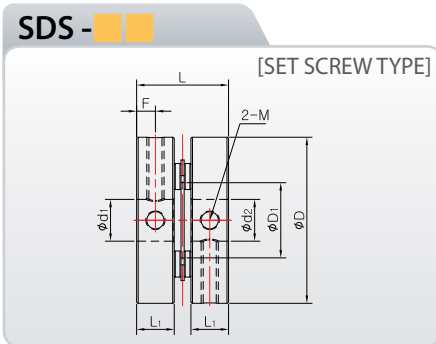

Dimensions & Performance

Product Number	Dimension (mm) (±0.3)					Fastening Bolt M	Fastening Torque (N·m)	Max·RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	D ₁	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SDS-16	16	6.7	12	5.1	2.5	M2.5	0.5	16,000	1	0.5	270	1.8 × 10 ⁻⁷	5	0.5	0.02	±0.1
SDS-16C	16	6.7	17.4	7.8	2.5	M2	0.5	14,000	1	0.5	270	2.6 × 10 ⁻⁷	7	1	0.02	±0.1
SDS-19	19	8.5	14.5	6.1	3	M3	0.7	16,000	1.8	0.9	600	3.0 × 10 ⁻⁷	6	1	0.02	±0.1
SDS-19C	19	8.5	19.3	8.7	2.9	M2.6	1	14,000	1.8	0.9	600	4.0 × 10 ⁻⁷	8	1	0.02	±0.1
SDS-22	22.2	10	14.8	6.2	3	M3	0.7	12,000	2.2	1.1	600	6.9 × 10 ⁻⁷	10	1	0.02	±0.1
SDS-22C	22.2	10	19.7	8.7	2.8	M2.6	1	10,000	2.2	1.1	600	1.0 × 10 ⁻⁶	15	1	0.02	±0.1
SDS-26	26.6	12.2	17.6	7.4	3.6	M4	1.7	12,000	3	1.5	900	2.0 × 10 ⁻⁶	20	1	0.02	±0.15
SDS-26C	26.6	12.2	24.1	10.6	3.4	M3	1.7	10,000	3	1.5	900	2.4 × 10 ⁻⁶	25	1	0.02	±0.15
SDS-31	31.8	14.4	17.6	7.2	3.6	M4	1.7	10,000	6	3	1,700	4.4 × 10 ⁻⁶	30	1	0.02	±0.2
SDS-31C	31.8	14.4	26.4	11.6	3.7	M3	1.7	9,000	6	3	1,700	5.8 × 10 ⁻⁶	40	1	0.02	±0.2
SDS-35C	35	16.2	28	12.7	4.4	M4	3.5	8,500	8	4	2,000	1.0 × 10 ⁻⁵	57	1	0.02	±0.2
SDS-39C	39	17	31.3	13.7	4.3	M4	3.5	8,000	10	5	2,300	1.6 × 10 ⁻⁵	70	1	0.02	±0.25
SDCS-42C	42.5	18	31.4	13.7	4.3	M4	3.5	8,000	14	7	2,800	3.4 × 10 ⁻⁵	95	1	0.02	±0.25
SDCS-47C	47	20.4	35.6	16	5.2	M4	3.5	8,000	24	12	6,000	5.4 × 10 ⁻⁵	140	1	0.02	±0.25
SDCS-54C	54	25	42.3	19	6.3	M5	8	8,000	44	22	11,000	9.8 × 10 ⁻⁵	200	1	0.02	±0.25

* Mass and mass moment of inertia are measured with max. bore size

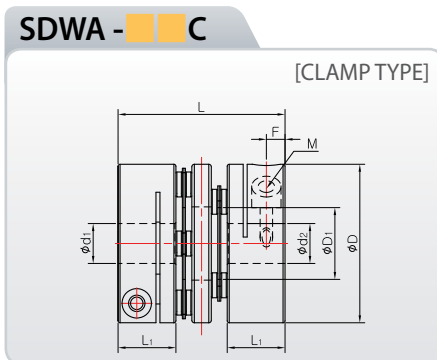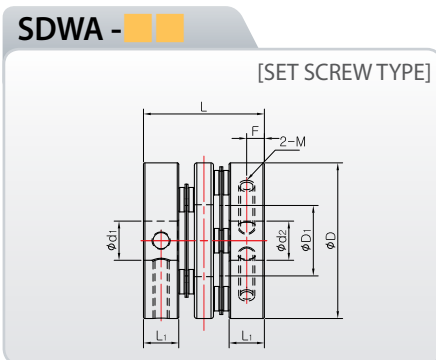


Dimensions & Performance

Product Number	Dimension (mm) (±0.3)					Fastening Bolt M	Fastening Torque (N·m)	Max·RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	D ₁	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SDWA-16	16	6.3	15.8	5.1	2.5	M2.5	0.5	16,000	1	0.5	200	2.2 × 10 ⁻⁷	6	1	0.05	±0.2
SDWB-16	16	6.3	17.8	5.1	2.5	M2.5	0.5	16,000	1	0.5	200	2.6 × 10 ⁻⁷	7	1	0.05	±0.2
SDWA-16C	16	6.3	21.2	7.8	2.5	M2	1	14,000	1	0.5	200	3.3 × 10 ⁻⁷	9	1	0.05	±0.2
SDWB-16C	16	6.3	23.2	7.8	2.5	M2	1	14,000	1	0.5	200	3.7 × 10 ⁻⁷	10	1	0.05	±0.2
SDWA-19	19	8.5	18.1	6.1	3	M3	0.7	16,000	1.8	0.9	300	5.3 × 10 ⁻⁷	10	1	0.05	±0.2
SDWB-19	19	8.5	21.1	6.1	3	M3	0.7	16,000	1.8	0.9	300	5.8 × 10 ⁻⁷	11	1	0.05	±0.2
SDWA-19C	19	8.5	23.3	8.7	2.9	M2.6	1	14,000	1.8	0.9	300	7.4 × 10 ⁻⁷	14	1	0.05	±0.2
SDWB-19C	19	8.5	26.3	8.7	2.9	M2.6	1	14,000	1.8	0.9	300	7.9 × 10 ⁻⁷	15	1	0.05	±0.2

* Mass and mass moment of inertia are measured with max. bore size

SD Series

Zero Backlash Disk Coupling

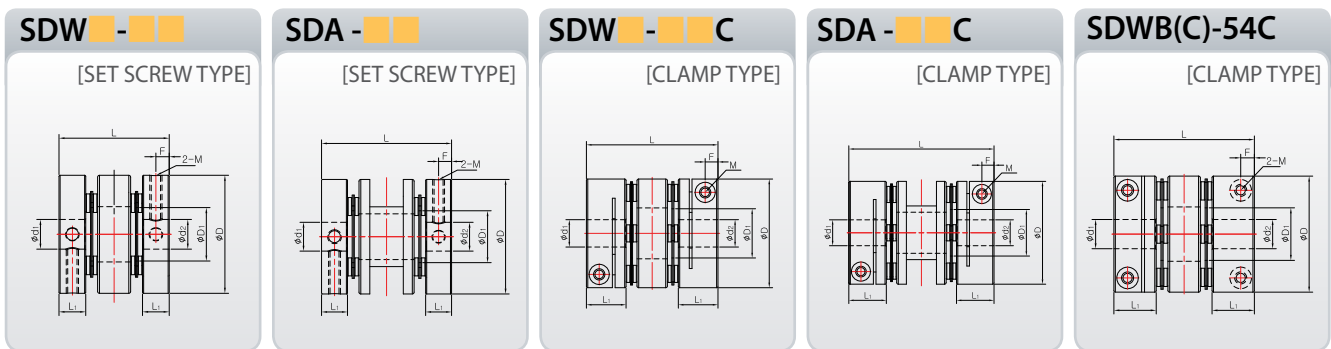

Dimensions & Performance

Product Number	Dimension (mm) (±0.3)					Fastening Bolt M	Fastening Torque (N·m)	Max. RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	D ₁	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SDWA-22	22.2	9	20.1	6.3	3	M3	0.7	12,000	2.2	1.1	400	1.0×10 ⁻⁶	16	1.5	0.12	±0.2
SDWB-22	22.2	9	22.3	6.3	3	M3	0.7	12,000	2.2	1.1	400	1.1×10 ⁻⁶	17	1.5	0.12	±0.2
SDA-22	22.2	8.3	28.3	6.3	3	M3	0.7	12,000	2.2	1.1	400	1.3×10 ⁻⁶	18	1.5	0.12	±0.2
SDWA-22C	22.2	9	25	8.7	2.8	M2.6	1	10,000	2.2	1.1	400	1.3×10 ⁻⁶	18	1.5	0.12	±0.2
SDWB-22C	22.2	9	27.2	8.7	2.8	M2.6	1	10,000	2.2	1.1	400	1.4×10 ⁻⁶	19	1.5	0.12	±0.2
SDA-22C	22.2	8.3	33.2	8.7	2.8	M2.6	1	10,000	2.2	1.1	400	1.5×10 ⁻⁶	20	1.5	0.12	±0.2
SDWA-26	26.6	12.2	26	7.4	3.6	M4	1.7	12,000	3	1.5	600	2.3×10 ⁻⁶	28	1.5	0.15	±0.3
SDA-26	26.6	10.5	31.7	7.4	3.6	M4	1.7	12,000	3	1.5	600	3.2×10 ⁻⁶	32	1.5	0.15	±0.3
SDWA-26C	26.6	12.2	32.5	10.6	3.4	M3	1.7	10,000	3	1.5	600	3.4×10 ⁻⁶	34	1.5	0.15	±0.3
SDA-26C	26.6	10.5	38.2	10.6	3.4	M3	1.7	10,000	3	1.5	600	3.9×10 ⁻⁶	39	1.5	0.15	±0.3
SDWA-31	31.8	14.4	24.7	7.2	3.6	M4	1.7	10,000	6	3	1,300	4.3×10 ⁻⁶	30	1.5	0.15	±0.4
SDWB-31	31.8	14.4	29.7	7.2	3.6	M4	1.7	10,000	6	3	1,300	5.5×10 ⁻⁶	38	1.5	0.15	±0.4
SDA-31	31.8	12.7	36.1	7.2	3.6	M4	1.7	10,000	6	3	1,300	5.5×10 ⁻⁶	38	1.5	0.15	±0.4
SDWA-31C	31.8	14.4	33.5	11.6	3.7	M3	1.7	9,000	6	3	1,300	7.5×10 ⁻⁶	52	1.5	0.15	±0.4
SDWB-31C	31.8	14.4	38.5	11.6	3.7	M3	1.7	9,000	6	3	1,300	8.8×10 ⁻⁶	60	1.5	0.15	±0.4
SDA-31C	31.8	12.7	44.9	11.6	3.7	M3	1.7	9,000	6	3	1,300	8.8×10 ⁻⁶	60	1.5	0.15	±0.4
new SDWA-35C	35	16.2	34.6	12.7	4.4	M4	3.5	8,500	8	4	1,500	1.21 X 10 ⁻⁵	66.8	1.5	0.16	±0.4
new SDWC-35C	35	16.2	38.1	12.7	4.4	M4	3.5	8,500	8	4	1,500	1.37 X 10 ⁻⁵	75	1.5	0.16	±0.4
SDWA-39C	39	17	39.5	13.7	4.3	M4	3.5	8,000	10	5	1,800	2.1×10 ⁻⁵	95	1.5	0.18	±0.4
SDWC-39C	39	17	45	13.7	4.3	M4	3.5	8,000	10	5	1,800	2.4×10 ⁻⁵	110	1.5	0.18	±0.4
SDA-39C	39	15.3	56.5	13.7	4.3	M4	3.5	8,000	10	5	1,800	3.0×10 ⁻⁵	120	1.5	0.18	±0.4
SDWC-42C	42.5	18	46.2	13.7	4.3	M4	3.5	8,000	14	7	2,000	3.3×10 ⁻⁵	120	1.5	0.18	±0.5
SDWC-47C	47	20.4	50	16	5.2	M4	3.5	8,000	24	12	4,000	5.5×10 ⁻⁵	160	1.5	0.2	±0.5
SDWB-54C	54	25	52.6	19	6.3	M5	8	8,000	44	22	7,000	1.1×10 ⁻⁴	250	1.5	0.2	±0.5
SDWC-54C	54	25	58.6	19	6.3	M5	8	8,000	44	22	7,000	1.2×10 ⁻⁴	280	1.5	0.2	±0.5

* Mass and mass moment of inertia are measured with max. bore size




Standard Inner diameter

Product Number	Standard Inner Diameter(d _i , d ₂ unit:mm)																							
	3	4	4.5	5	6	6.35	7	8	9	9.525	10	11	12	12.7	14	15	15.875	16	17	18	19	20	24	25
SD□□-16□	●	●	●	●																				
SD□□-19□	●	●	●	●	●																			
SD□□-22□	●	●	●	●	●	●	●	●	●*	●*														
SD□□-26□		●	●	●	●	●	●	●	●	●	●													
SD□□-31□				●	●	●	●	●	●	●	●	●	●	●	●	●*								
SD□□-35□				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
SD□□-39□				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
SD□□-42C					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●*	●*		
SD□□-47C								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SD□□-54□											●	●	●	●	●	●	●	●	●	●	●	●	●	●

- For the inner diameter, INCH type is available
- Keyway is available
- In case of the ★ inner bore diameter, a shaft cannot penetrate through the stainless steel plate spring.
- Nonstandard inner diameter is also available
- The recommendation for shaft tolerance is h7.

SD Series Zero Backlash Disk Coupling

Please, download CAD DATA from www.sungilfa.com

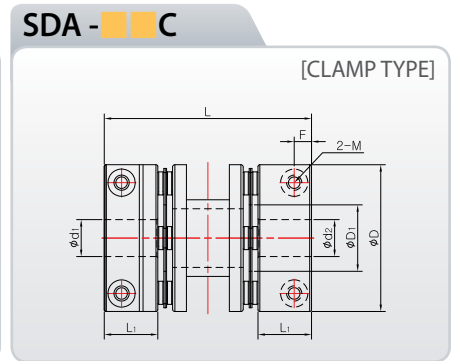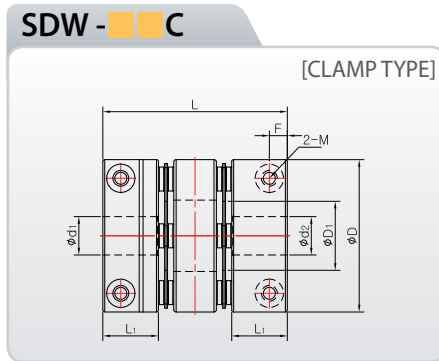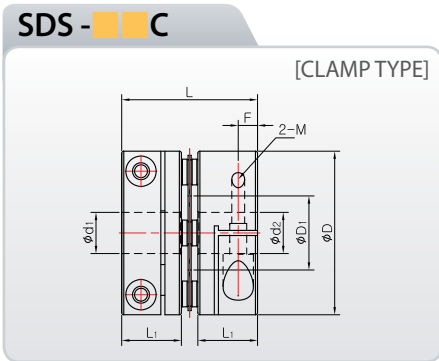

Dimensions & Performance

Product Number	Dimension (mm) (±0.3)					Fastening Bolt M	Fastening Torque (N·m)	Max. RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	D ₁	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SDS-80C	80	35.8	66.1	29.7	9.4	M8	30	7,000	150	75	40,000	7.5 × 10 ⁻⁴	800	1	0.02	±0.4
SDW-80C	80	35.8	81.8	29.7	9.4	M8	30	6,000	150	75	20,000	8.4 × 10 ⁻⁴	900	2	0.4	±0.6
SDA-80C	80	32	98.3	29.7	9.4	M8	30	6,000	150	75	20,000	9.5 × 10 ⁻⁴	1,000	2	0.5	±0.6
SDS-90C	94.5	41.6	68.9	30.4	9.3	M8	30	6,000	300	150	60,000	1.2 × 10 ⁻³	930	1	0.02	±0.5
SDW-90C	94.5	41.6	98.9	30.4	9.3	M8	30	6,000	300	150	35,000	1.8 × 10 ⁻³	1,350	2	0.4	±0.8
SDS-100C	104.5	47.7	71.7	30.7	9.3	M8	30	6,000	440	220	70,000	2.2 × 10 ⁻³	1,300	1	0.02	±0.6
SDW-100C	104.5	47.7	103.8	30.7	9.3	M8	30	6,000	440	220	50,000	2.9 × 10 ⁻³	1,700	2	0.4	±0.8

* Mass and mass moment of inertia are measured with max. bore size

Standard Inner diameter




Product Number	Standard Inner Diameter(d ₁ , d ₂ unit:mm)															
	15	16	18	19	20	22	24	25	28	30	32	35	40	45	50	50
SDS-80C	●	●	●	●	●	●	●	●	●	●	●					
SDW-80C	●	●	●	●	●	●	●	●	●	●	●					
SDS-90C					●	●	●	●	●	●	●	●	●	●		
SDW-90C					●	●	●	●	●	●	●	●	●	●		
SDS-100C					●	●	●	●	●	●	●	●	●	●	●	★
SDW-100C					●	●	●	●	●	●	●	●	●	●	●	★

- For the inner diameter, INCH type is available
- Nonstandard inner diameter is also available
- Keyway is available
- The recommendation for shaft tolerance is h7.
- In case of the ★ inner bore diameter, a shaft cannot penetrate through the stainless steel plate spring.



SD Series

Zero Backlash Disk Coupling

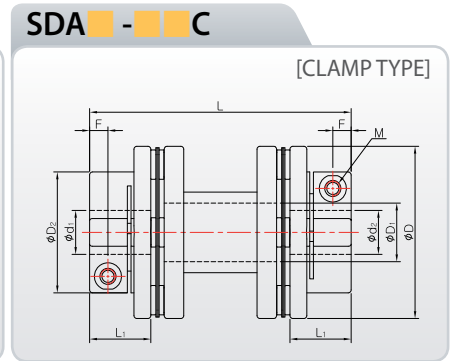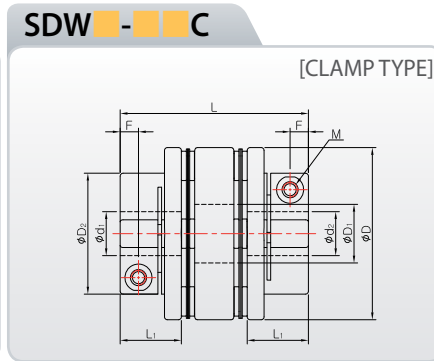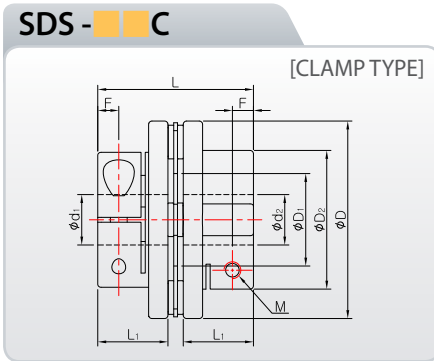

Dimensions & Performance

Product Number	Dimension (mm) (±0.3)						Fastening Bolt M	Fastening Torque (N·m)	Max-RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	D ₁	D ₂	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SDS-42C	42.5	18	29.3	30.8	13.4	3.8	M3	1.7	8,000	14	7	2,800	1.7×10 ⁻⁵	65	1	0.02	±0.25
SDWA-42C	42.5	18	29.3	39.7	13.4	3.8	M3	1.7	8,000	14	7	2,000	2.1×10 ⁻⁵	84	1.5	0.18	±0.5
SDWB-42C	42.5	18	29.3	44.2	13.4	3.8	M3	1.7	8,000	14	7	2,000	2.4×10 ⁻⁵	94	1.5	0.18	±0.5
SDAA-42C	42.5	18	29.3	50	13.4	3.8	M3	1.7	8,000	14	7	2,000	2.7×10 ⁻⁵	105	1.5	0.18	±0.5
SDAB-42C	42.5	18	29.3	57.9	13.4	3.8	M3	1.7	8,000	14	7	2,000	2.8×10 ⁻⁵	110	1.5	0.18	±0.5
SDAC-42C	42.5	18	29.3	67.3	13.4	3.8	M3	1.7	8,000	14	7	2,000	2.9×10 ⁻⁵	115	1.5	0.18	±0.5
SDS-47C	47	20.4	33	37	16.7	5	M4	3.5	8,000	24	12	6,000	3.2×10 ⁻⁵	108	1	0.02	±0.25
SDWA-47C	47	20.4	33	45.6	16.7	5	M4	3.5	7,500	24	12	4,000	3.6×10 ⁻⁵	120	1.5	0.2	±0.5
SDWB-47C	47	20.4	33	51.4	16.7	5	M4	3.5	7,500	24	12	4,000	3.9×10 ⁻⁵	132	1.5	0.2	±0.5
SDAA-47C	47	20	33	63.8	16.7	5	M4	3.5	7,500	24	12	4,000	4.5×10 ⁻⁵	152	1.5	0.2	±0.5
SDAB-47C	47	20	33	90.7	16.7	5	M4	3.5	7,500	24	12	4,000	5.1×10 ⁻⁵	172	1.5	0.2	±0.5
SDS-54C	54	25	38.5	47.1	21.4	6.1	M5	8	8,000	44	22	11,000	5.5×10 ⁻⁵	145	1	0.02	±0.25
SDWA-54C	54	25	38.5	60.6	21.4	6.1	M5	8	7,500	44	22	7,000	7.2×10 ⁻⁵	192	1.5	0.2	±0.5
SDAA-54C	54	24.3	38.5	76	21.4	6.1	M5	8	7,500	44	22	7,000	9.0×10 ⁻⁵	240	1.5	0.2	±0.5
SDAB-54C	54	24.3	38.5	89.9	21.4	6.1	M5	8	7,500	44	22	7,000	1.1×10 ⁻⁴	266	1.5	0.2	±0.5
SDS-64C	64	25.8	48	58.2	26	7.5	M6	13	7,000	62	31	20,000	1.8×10 ⁻⁴	292	1	0.02	±0.25
SDWA-64C	64	25.8	48	74.4	26	7.5	M6	13	6,500	62	31	11,000	2.2×10 ⁻⁴	373	1.5	0.3	±0.5
SDA-64C	64	25.8	48	89.9	26	7.5	M6	13	6,500	62	31	11,000	2.7×10 ⁻⁴	450	1.5	0.3	±0.5

* Mass and mass moment of inertia are measured with max. bore size.

■ For SDW□-64C, cylindrical-shaped hubs are available from bore size Ø15. Please indicate "D" after the bore size when the order is placed.

■ For SDW□-64C, cylindrical-shaped hubs are used from Ø28 (inner bore diameter).

Standard Inner diameter

Product Number	Standard Inner Diameter (d ₁ , d ₂ , unit:mm)																											
	5	6	6.35	7	8	9	9.525	10	11	12	12.7	14	15	15.875	16	17	18	19	20	21	22	24	25	26	28	30	35	
SD□□-42C	●	●	●	●	●	●	●	●	●	●	●	●	●															
SD□□-47C				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
SD□□-54C								●	●	●	●	●	●	●	●	●	●	●	●									
SD□□-64C										●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	★	★	★	★

■ For the inner diameter, INCH type is available

■ Nonstandard inner diameter is also available


■ Keyway is available

■ The recommendation for shaft tolerance is h7.

■ In case of the ★ inner bore diameter, a shaft cannot penetrate through the stainless steel plate spring.

SD Series Zero Backlash Disk Coupling

Please, download CAD DATA from www.sungilfa.com

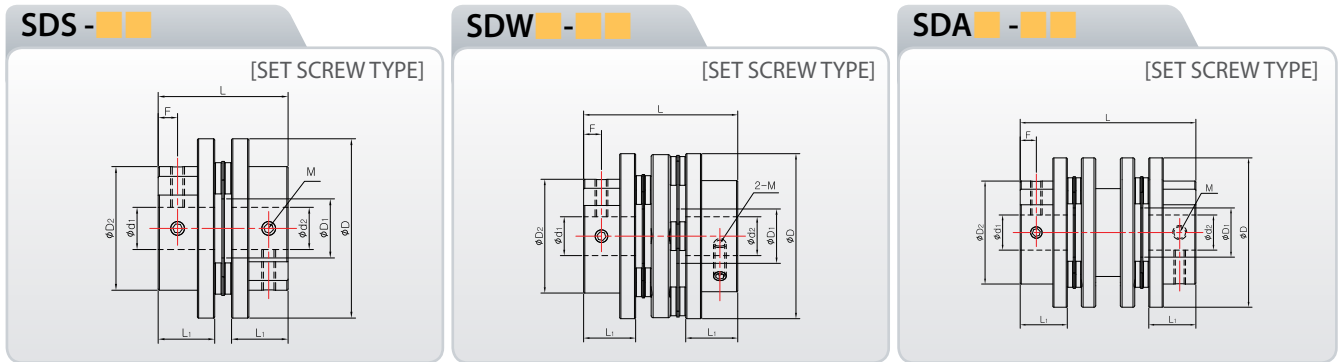

Dimensions & Performance

Product Number	Dimension (mm) (±0.3)						Fastening Bolt M	Fastening Torque (N·m)	Max·RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	D ₁	D ₂	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SDS-42	42.5	18	29.3	30.8	13.4	4.6	M4	1.7	8,000	14	7	2,800	1.7×10 ⁻⁵	65	1	0.02	±0.25
SDWA-42	42.5	18	29.3	39.7	13.4	4.6	M4	1.7	8,000	14	7	2,000	2.1×10 ⁻⁵	84	1.5	0.18	±0.5
SDWB-42	42.5	18	29.3	44.2	13.4	4.6	M4	1.7	8,000	14	7	2,000	2.4×10 ⁻⁵	94	1.5	0.18	±0.5
SDAA-42	42.5	18	29.3	50	13.4	4.6	M4	1.7	8,000	14	7	2,000	2.7×10 ⁻⁵	105	1.5	0.18	±0.5
SDAB-42	42.5	18	29.3	57.9	13.4	4.6	M4	1.7	8,000	14	7	2,000	2.8×10 ⁻⁵	110	1.5	0.18	±0.5
SDAC-42	42.5	18	29.3	67.3	13.4	4.6	M4	1.7	8,000	14	7	2,000	2.9×10 ⁻⁵	115	1.5	0.18	±0.5
SDS-47	47	20.4	33	31.4	13.9	4.5	M5	4	8,000	24	12	6,000	2.7×10 ⁻⁵	91	1	0.02	±0.25
SDWA-47	47	20.4	33	39.9	13.9	4.5	M5	4	8,000	24	12	4,000	3.4×10 ⁻⁵	115	1.5	0.2	±0.5
SDWB-47	47	20.4	33	45.7	13.9	4.5	M5	4	8,000	24	12	4,000	3.6×10 ⁻⁵	120	1.5	0.2	±0.5
SDAA-47	47	20	33	58.1	13.9	4.5	M5	4	8,000	24	12	4,000	4.2×10 ⁻⁵	140	1.5	0.2	±0.5
SDAB-47	47	20	33	85	13.9	4.5	M5	4	8,000	24	12	4,000	4.7×10 ⁻⁵	160	1.5	0.2	±0.5
SDS-54	54	25	38.5	42.3	19	5.8	M5	4	7,500	44	22	11,000	4.9×10 ⁻⁵	130	1	0.02	±0.25
SDWA-54	54	25	38.5	55.8	19	5.8	M5	4	7,500	44	22	7,000	6.7×10 ⁻⁵	177	1.5	0.2	±0.5
SDAA-54	54	24.3	38.5	71.2	19	5.8	M5	4	7,500	44	22	7,000	9.0×10 ⁻⁵	230	1.5	0.2	±0.5
SDAB-54	54	24.3	38.5	85.1	19	5.8	M5	4	7,500	44	22	7,000	1.1×10 ⁻⁴	250	1.5	0.2	±0.5
SDS-64	64	25.8	48	58.2	26	8	M8	15	7,000	62	31	20,000	1.8×10 ⁻⁴	292	1	0.02	±0.25
SDWA-64	64	25.8	48	74.4	26	8	M8	15	7,000	62	31	11,000	2.2×10 ⁻⁴	373	1.5	0.3	±0.5
SDA-64	64	25.8	48	89.9	26	8	M8	15	7,000	62	31	11,000	2.7×10 ⁻⁴	450	1.5	0.3	±0.5

* Mass and mass moment of inertia are measured with max. bore size.

■ For SDW □-64C, cylindrical-shaped hubs are available from bore size Ø15. Please indicate "D" after the bore size when the order is placed.

■ For SDW □-64C, cylindrical-shaped hubs are used from Ø28(inner bore diameter).

Standard Inner diameter

Product Number	Standard Inner Diameter(d _i , d _j , unit:mm)																												
	5	6	6.35	7	8	9	9.525	10	11	12	12.7	14	15	15.875	16	17	18	19	20	21	22	24	25	26	28	30	35		
SD□□-42		●	●	●	●	●	●	●	●	●	●	●	●																
SD□□-47					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
SD□□-54								●	●	●	●	●	●	●	●	●	●	●	●	●	●								
SD□□-64										●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

■ For the inner diameter, INCH type is available

■ Nonstandard inner diameter is also available

■ Keyway is available

■ The recommendation for shaft tolerance is h7.

■ In case of the ★ inner bore diameter, a shaft cannot penetrate through the stainless steel plate spring.

SD Series (Stainless)

Zero Backlash Disk Coupling (Stainless)

'SI, CO' mark (Trademark : 40-2012-0061376) indicates that the authenticity is certified.

'SDS, SDW' (Trademark : 40-2012-0044877, 0044876) are the original trademarks for SUNGIL's Disk Coupling.



Features


- Standardized disk couplings made up of stainless steel domestically for the first time.
- Various sizes of outer diameter and inner bore is available
- High torsional stiffness
- Identical clockwise and counter-clockwise rotational characteristics
- Single Disk Type/Double Disk Type
- Excellent corrosion resistance (Cleanroom, High vacuum equipment, High, High Humidity)




Application

- High precise stage
- Position controlling system
- Index table
- Servo Motor, Stepping Motor
- Power and motion transmission in vacuum or clean room
- Used in acidic or alkaline environments

Structure

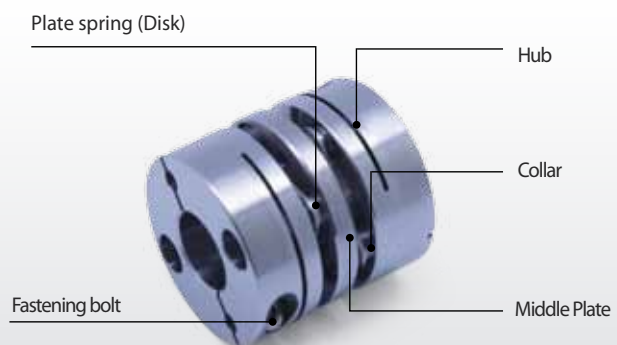

How to order product

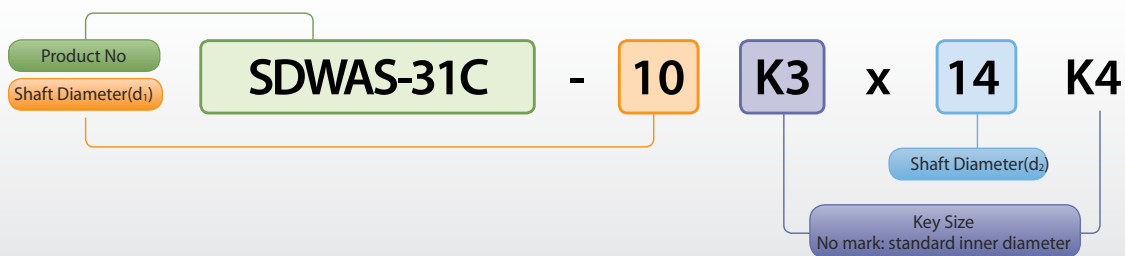

※ Please mark each inner bore diameter.


※ It is impossible to order the additional keyways after ordering.

※ Do not disassemble because each part is optimally assembled for the exact concentricity between each shaft hole.


SD Series (Stainless)

Zero Backlash Disk Coupling (Stainless)


Please, download CAD DATA from www.sungilfa.com

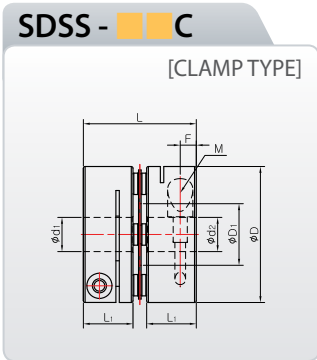


Outer diameter (D) : $\varnothing 19 \sim \varnothing 47$

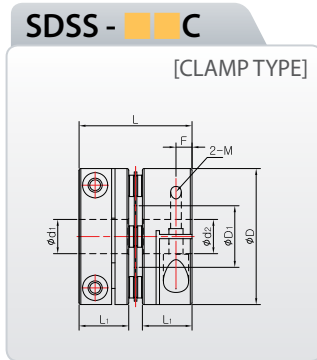

Outer diameter(D) : $\varnothing 54 \sim \varnothing 64$

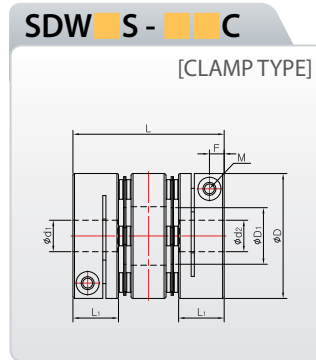

Outer diameter (D) : $\varnothing 19 \sim \varnothing 47$

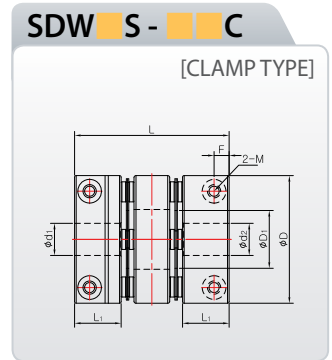

Outer diameter (D) : $\varnothing 54 \sim \varnothing 64$

Dimensions & Performance

Product Number	Dimension (mm) (± 0.3)					Fastening Bolt M	Fastening Torque (N·m)	Max. RPM (min^{-1})	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia ($\text{kg} \cdot \text{m}^2$)	Mass (g)	Permissible Misalignment		
	D	D ₁	L	L ₁	F									Angle (°)	Parallel (mm)	End-Play (mm)
SDSS-19C	19	8.5	19.3	8.7	2.9	M2.6	1	14000	1	0.5	960	1.0×10^{-6}	21	1	0.02	± 0.1
SDSS-22C	22.2	10	19.7	8.7	2.8	M2.6	1	10,000	2.2	1.1	960	2.5×10^{-6}	42	1	0.02	± 0.1
SDSS-26C	26.6	12.2	24.1	10.7	3.4	M3	1.5	10,000	3	1.5	1,200	6.0×10^{-6}	70	1	0.02	± 0.15
SDSS-31C	31.8	14.4	26.4	11.6	3.7	M3	1.5	9,000	6	3	2,600	1.5×10^{-5}	112	1	0.02	± 0.2
SDSS-39C	39	17	31.3	13.7	4.3	M4	2.5	8,000	10	5	2,800	4.0×10^{-5}	196	1	0.02	± 0.2
SDSS-42C	42.5	18	31.4	13.7	4.3	M4	2.5	8,000	14	7	3,300	8.5×10^{-5}	266	1	0.02	± 0.25
SDSS-47C	47	20.4	36	16	5.2	M4	2.5	8,000	24	12	7,000	1.4×10^{-4}	392	1	0.02	± 0.25
SDSS-54C	54	25	42	19	6.3	M5	4	8,000	44	22	12,000	2.5×10^{-4}	560	1	0.02	± 0.25
SDSS-64C	64	25.8	57.5	26	7.5	M6	8	6,000	62	31	22,000	6.5×10^{-4}	950	1	0.02	± 0.25
SDWAS-19C	19	8.5	23.3	8.7	2.9	M2.6	1	14,000	1	0.5	400	1.6×10^{-6}	37	1	0.05	± 0.2
SDWBS-19C	19	8.5	26.3	8.7	2.9	M2.6	1	14,000	1	0.5	400	2.0×10^{-6}	39	1	0.05	± 0.2
SDWAS-22C	22.2	9	25	8.7	2.8	M2.6	1	10,000	2.2	1.1	520	3.3×10^{-6}	47	1.5	0.12	± 0.2
SDWBS-22C	22.2	9	27.2	8.7	2.8	M2.6	1	10,000	2.2	1.1	520	3.5×10^{-6}	50	1.5	0.12	± 0.2
SDWAS-26C	26.6	12.2	32.5	10.7	3.4	M3	1.5	10,000	3	1.5	750	8.5×10^{-6}	92	1.5	0.15	± 0.3
SDWAS-31C	31.8	14.4	33.5	11.6	3.7	M3	1.5	10,000	6	3	1,650	1.9×10^{-5}	140	1.5	0.15	± 0.4
SDWBS-31C	31.8	14.4	38.5	11.6	3.7	M3	1.5	8,000	6	3	1,650	2.2×10^{-5}	162	1.5	0.15	± 0.4
SDWAS-39C	39	17	39.5	13.7	4.3	M4	2.5	8,000	10	5	2,250	5.3×10^{-5}	257	1.5	0.18	± 0.4
SDWCS-39C	39	17	45	13.7	4.3	M4	2.5	8,000	10	5	2,250	6.0×10^{-5}	297	1.5	0.18	± 0.4
SDWCS-42C	42.5	18	46.2	13.7	4.3	M4	2.5	8,000	14	7	2,500	8.3×10^{-5}	324	1.5	0.18	± 0.5
SDWCS-47C	47	20.4	50.7	16	5.2	M4	2.5	8,000	24	12	5,000	1.4×10^{-4}	432	1.5	0.2	± 0.5
SDWBS-54C	54	25	52	19	6.3	M5	4	8,000	44	22	8,750	2.8×10^{-4}	675	1.5	0.2	± 0.5
SDWCS-54C	54	25	58	19	6.3	M5	4	8,000	44	22	8,750	3.0×10^{-4}	756	1.5	0.2	± 0.5
SDWAS-64C	64	25.8	73	26	7.5	M6	8	6,500	62	31	13,800	6.8×10^{-4}	1200	1.5	0.3	± 0.5

* Mass and mass moment of inertia are measured with max. bore size

Standard bore diameter

Product Number	Standard Inner Diameter (d_1, d_2 unit:mm)																											
	4	4.5	5	6	6.35	7	8	9	9.525	10	11	12	12.7	14	15	15.875	16	17	18	19	20	21	22	24	25	26	28	30
SD□S-19C	●	●	●	●																								
SD□S-22C	●	●	●	●	●	●	●	●	★	★																		
SD□S-26C			●	●	●	●	●	●	●	●																		
SD□S-31C				●	●	●	●	●	●	●	●	●	●	●	●	★												
SD□S-39C							●	●	●	●	●	●	●	●	●	●	●	●										
SD□S-42C							●	●	●	●	●	●	●	●	●	●	●	●	●	●	★	★						
SD□S-47C										●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SD□S-54C										●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SD□S-64C											●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	★

■ For the inner diameter, INCH type is available ■ Non-standard inner bore diameter is also available ■ h7 shaft tolerance is recommended.
 ■ Keyway is available. ■ The inner diameter marked ★ is not available for Shaft-penetration type.

SHD Series

High Torque Flexible Disk Coupling

'SI. CO' mark (Trademark : 40-2012-0061376) indicates that the authenticity is certified.
 'SHD' (Trademark : 40-2012-0044879) is the original trademark for SUNGIL's High Performance Disk Coupling.



2007
Venture Design Award

Optimal Design with New concept!! We realize ideal Servo System

The newly developed flexible disk coupling is realized by optimized design using computational simulations and it maximizes the stainless plate spring's mobility space.

We increased the number of mounting holes to distribute the stress around the bolts and made stainless plate springs flexible to realize a perfect servo system

We consider all components to maximize the life time. For example, stainless plates are assembled with bushing in one-piece package.

The outer diameter size of bushing is larger than the diameter size of the mounting hole. It is manufactured in rounding shape, so this product has durability against bending during parallel, angular misalignment and end-play. Also, we combined several stainless plates with the bushing as a package. Therefore, it is possible to make extremely precise concentric combinations and prevent and protect the disks deformation while there is any load and misalignment.

SUNGIL machinery assembles products perfectly.
 We measure and adjust concentricity in every process for perfect concentricity of the both-side holes.

Taper Clamp type can solve the balancing problem that happens in the conventional fastening methods. The small hole on the outer diameter of coupling prevents the product from rotating with the bolt when user fastens with a fastening bolt. It is manufactured to assemble easily.



※ Registration of utility model :
20-0386586



Features

- Stainless disk absorb misalignments
- High torsional stiffness
- Zero backlash
- Identical CW/CCW rotational performance
- Suitable for high rotation speed
- Accurate and fast response performance
- Retaining 1/10 Taper Busing

Material

- Hub : High strength Aluminum alloy (Surface treatment : Alumite)
- Middle plate : High strength Aluminum alloy (Surface treatment : Alumite)
- Disk : Stainless steel
- Bolt : SCM435 (Assembly with stainless steel components (collar, bolt) is available)


How to order product



※ Please mark each inner diameter size.
 ※ Clamp split hub is available for the SHD□-□□C, but the lead time must be checked.

SHD Series High Torque Flexible Disk Coupling

Please, download CAD DATA from www.sungilfa.com

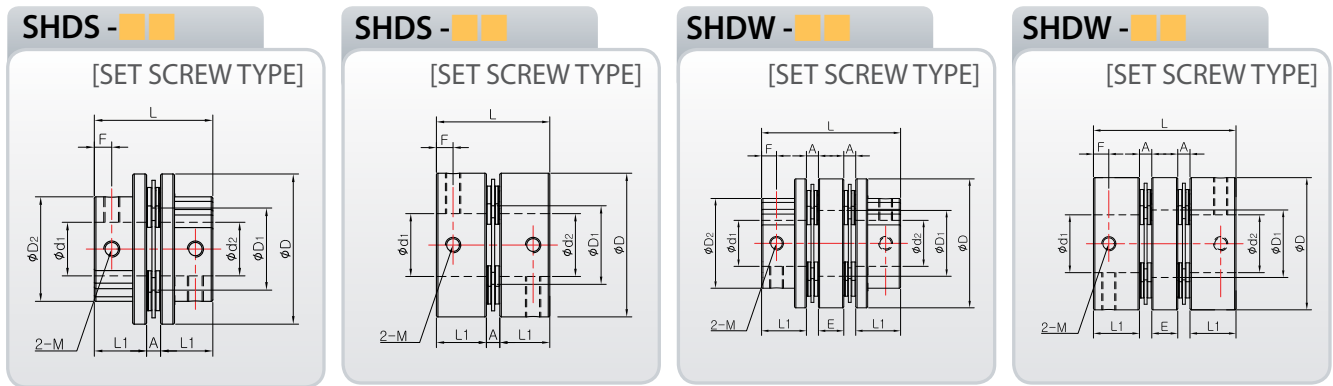

Dimensions & Performance







Product Number	SHDS - 56	SHDW - 56	SHDS - 66	SHDW - 66	SHDS - 88	SHDW - 88	SHDS - 110	SHDW - 110
ØD	56	56	66	66	88	88	108	108
ØD ₂	39	39	46	46	63	63	77	77
F	6.5	6.5	7.5	7.5	9.5	9.5	13	13
L ₁	19.5	19.5	24.5	24.5	30	30	34.5	34.5
A	5.2	5.2	7.5	7.5	9.9	9.9	8.7	8.7
L	44.2	60.4	56.5	80	69.9	99.8	77.7	111
ØD ₁	30.6	28.6	35.6	35.6	46	46	61.5	61.5
E	-	11	-	16	-	20	-	24.6
M	M6	M6	M8	M8	M8	M8	M10	M10
Wrench Torque(N·m)	7	7	15	15	15	15	30	30
Rated Torque(N·m)	35	35	60	60	180	180	280	280
Max. Torque(N·m)	70	70	120	120	360	360	560	560
Max. RPM	7,700	7,700	7,000	7,000	5,500	5,500	4,000	4,000
Moment of Inertia(Kg·m ²)	2.9 × 10 ⁻⁵	4.6 × 10 ⁻⁵	8.0 × 10 ⁻⁵	1.2 × 10 ⁻⁴	2.9 × 10 ⁻⁴	4.3 × 10 ⁻⁴	2.0 × 10 ⁻³	3.2 × 10 ⁻³
Torsional Stiffness(N·m/rad)	2.0 × 10 ⁴	1.0 × 10 ⁴	3.0 × 10 ⁴	1.5 × 10 ⁴	7.0 × 10 ⁴	3.5 × 10 ⁴	1.4 × 10 ⁵	7.0 × 10 ⁴
Mass(g)	150	240	300	440	600	900	1,190	1,750
Allowable Angular Misalignment(°)	0.7	1	0.7	1	0.7	1	0.7	1
Allowable Parallel Misalignment(±mm)	0.02	0.2	0.02	0.2	0.02	0.2	0.02	0.25
Allowable End-Play(±mm)	0.3	0.6	0.3	0.6	0.3	0.6	0.5	1

* Mass and mass moment of inertia are measured with max. bore size.

※ SHD □ -56 : Cylindrical shape hub from Ø22 ※ SHD □ -66 : Cylindrical shape hub from Ø26



* There is no relation between "Rated torque & max. torque" and "slip torque".

※ SHD □ -88 : Cylindrical shape hub from Ø32 ※ SHD □ -110 : Cylindrical shape hub from Ø48

Product Number	Single Disk Type			
SHDS				
	SHDS-□□	SHDS-□□	SHDS-□□C	SHDS-□□T
Product Number	Double Disk Type			
SHDS				
	SHDW-□□	SHDW-□□	SHDW-□□C	SHDW-□□T

SHD Series

High Torque Flexible Disk Coupling

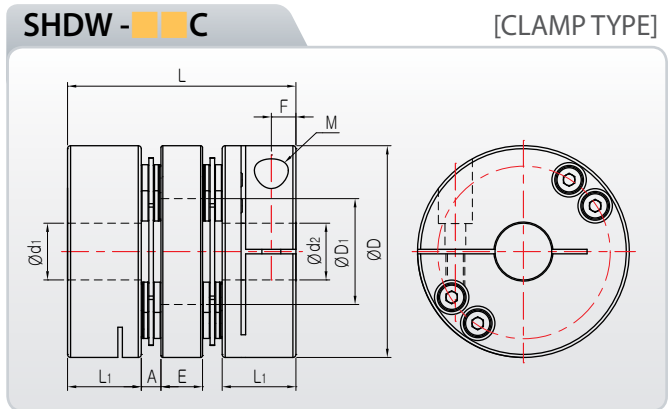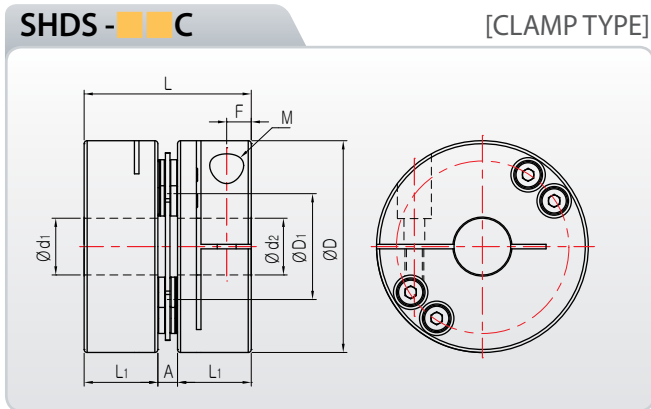

Dimensions & Performance

Product Number	SHDS - 56C	SHDW - 56C	SHDS - 66C	SHDW - 66C	SHDS - 88C	SHDW - 88C	SHDS - 110C	SHDW - 110C
ØD	56	56	66	66	88	88	108	108
L ₁	19.5	19.5	24.5	24.5	30	30	34.5	34.5
A	5.2	5.2	7.5	7.5	9.9	9.9	8.7	8.7
L	44.2	60.4	56.5	80	69.9	99.8	77.7	111
F	6.5	6.5	7.5	7.5	10	10	10.5	10.5
ØD ₁	30.6	28.6	35.6	35.6	46	46	61.5	61.5
E	-	11	-	16	-	20	-	24.6
M	M6	M6	M6	M6	M8	M8	M10	M10
Wrench Torque(N·m)	13	13	13	13	30	30	50	50
Rated Torque(N·m)	35	35	60	60	180	180	280	280
Max. Torque(N·m)	70	70	120	120	360	360	560	560
Max. RPM	7,000	7,000	6,500	6,500	5,500	5,500	4,000	4,000
Moment of Inertia(Kg·m ²)	4.0 × 10 ⁻⁵	5.8 × 10 ⁻⁵	1.0 × 10 ⁻⁴	1.4 × 10 ⁻⁴	4.3 × 10 ⁻⁴	5.7 × 10 ⁻⁴	2.3 × 10 ⁻³	3.7 × 10 ⁻³
Torsional Stiffness(N·m/rad)	2.0 × 10 ⁴	1.0 × 10 ⁴	3.0 × 10 ⁴	1.5 × 10 ⁴	7.0 × 10 ⁴	3.5 × 10 ⁴	1.4 × 10 ⁵	7.0 × 10 ⁴
Mass(g)	210	300	380	520	900	1,200	1,350	1,920
Allowable Angular Misalignment(°)	0.7	1	0.7	1	0.7	1	0.7	1
Allowable Parallel Misalignment(±mm)	0.02	0.2	0.02	0.2	0.02	0.2	0.02	0.25
Allowable End-Play(±mm)	0.3	0.6	0.3	0.6	0.3	0.6	0.5	1


* Mass and mass moment of inertia are measured with max. bore size.

* There is no relation between "Rated torque & max. torque" and "slip torque".



SHD Series High Torque Flexible Disk Coupling

Please, download CAD DATA from www.sungilfa.com

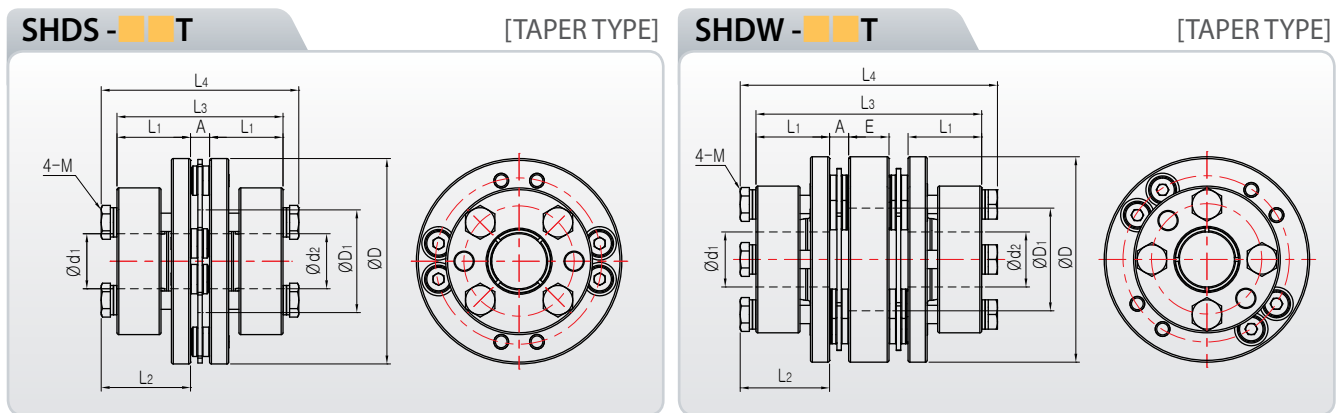

Dimensions & Performance

Product Number	SHDS - 56T	SHDW - 56T	SHDS - 66T	SHDW - 66T	SHDS - 88T	SHDW - 88T	SHDS - 110T	SHDW - 110T
ØD	56	56	66	66	88	88	108	108
L1	20.2	20.2	25	25	30	30	30.7	30.7
L2	24.7	24.7	30	30	35.2	35.2	35.9	35.9
A	5.2	5.2	7.5	7.5	9.9	9.9	8.7	8.7
L3	45.6	61.8	57.5	81	69.9	99.8	70.1	103.4
L4	54.6	70.8	67.5	91	80.3	110.2	80.5	113.8
ØD ₁	30.6	28.6	35.6	35.6	46	46	61.5	61.5
E	-	11	-	16	-	20	-	24.6
M	M5	M5	M6	M6	M6	M6	M6	M6
Wrench Torque(N·m)	8	8	13	13	13	13	13	13
Allowable Torque(N·m)	60	60	120	120	200	200	350	350
Max. RPM	7,700	7,700	7,000	7,000	6,000	6,000	4,500	4,500
Moment of Inertia(Kg·m ²)	3.6 × 10 ⁻⁵	5.4 × 10 ⁻⁵	8.6 × 10 ⁻⁵	1.2 × 10 ⁻⁴	3.2 × 10 ⁻⁴	4.6 × 10 ⁻⁴	1.6 × 10 ⁻³	3.7 × 10 ⁻³
Torsional Stiffness(N·m/rad)	2.0 × 10 ⁴	1.0 × 10 ⁴	3.0 × 10 ⁴	1.5 × 10 ⁴	7.0 × 10 ⁴	3.5 × 10 ⁴	1.4 × 10 ⁵	7.0 × 10 ⁴
Mass(g)	190	280	320	460	670	970	980	1,530
Allowable Angular Misalignment(°)	0.7	1	0.7	1	0.7	1	0.7	1
Allowable Parallel Misalignment(±mm)	0.02	0.2	0.02	0.2	0.02	0.2	0.02	0.25
Allowable End-Play(±mm)	0.3	0.6	0.3	0.6	0.3	0.6	0.5	1

* Mass and mass moment of inertia are measured with max. bore size.

* Allowable torque is stated based on the smallest shaft diameter. If the size of shaft diameter with surface pressure becomes larger, allowable torque will get higher.

Standard Inner diameter

Product Number	Standard Inner Diameter(d ₁ , d ₂ , unit:mm)																								
	10	11	12	14	15	16	18	19	20	22	24	25	26	28	30	32	35	38	40	42	45	48	50	55	60
SHD □ - 56 □	●	●	●	●	●	●	●	●	●	●	●	●													
SHD □ - 66 □					●	●	●	●	●	●	●	●	●	●	●	●									
SHD □ - 88 □									●	●	●	●	●	●	●	●	●	●	●	●	●	●			
SHD □ - 110 □																●	●	●	●	●	●	●	●	●	●

■ We recommend that tolerance of shaft is h7.

SCJ Series

Cross Joint Coupling



'SI. CO' mark(Trademark : 40-2012-0061376) indicates that the authenticity is certified.
 'SCJ' (Trademark : 40-2012-0044875) is the original trademark for SUNGIL's Cross Joint Coupling.

SUNGIL's Cross Joint type is a precise compensation coupling that absorbs parallel and angular misalignment by the unique combination of pin and dry bearing. We combined the advantages of Oldham coupling and Universal joint to prevent internal stress induced by misalignment or vibration. It is designed simply with high strength and low moment of inertia, so it has accurate response performance




2006
Venture Design Award




Features

- Excellent absorbability in eccentricity and angular misalignment(bearing, center block, pin)
- Identical CW/CCW rotational performance
- Minimized backlash
- Minimized load on shaft
- Various sizes are available
- Excellent durability
- Resistance against chemical and oil

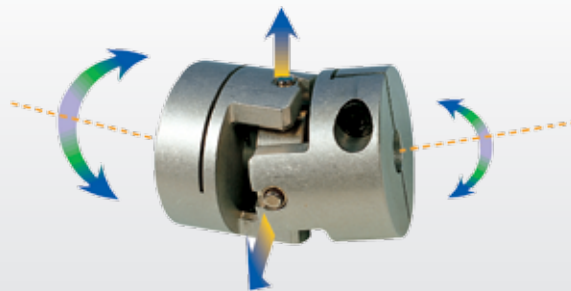

Structure & Material

Pin : Steel
 Surface Treatment :
 Electroless Nickel Coating
 Bush : Dry Bearing



Hub : Aluminum Alloy
 Surface Treatment :
 Alumite

Center Block : Stainless Steel

Clamping bolt: SCM435
 (Stainless steel bolt is available)



CLAMP TYPE




SET SCREW TYPE

Application

- Robot, X-Y table
- Equipment related to
Semiconductor and Display
- CNC, MCT, Machining tool
- Medical Instrument
- Optical instrument, Measuring tool


How to order product

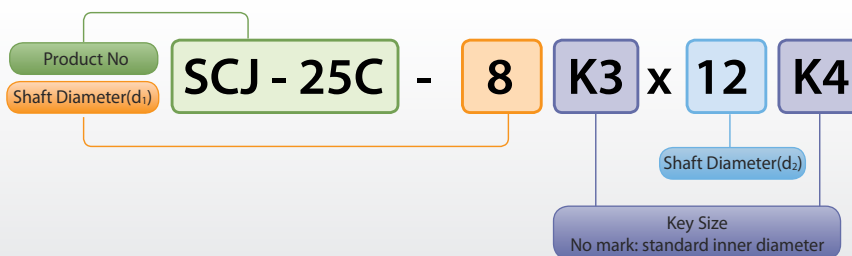

※ Please mark each inner diameter size.

SCJ Series Cross Joint Coupling

Please, download CAD DATA from www.sungilfa.com

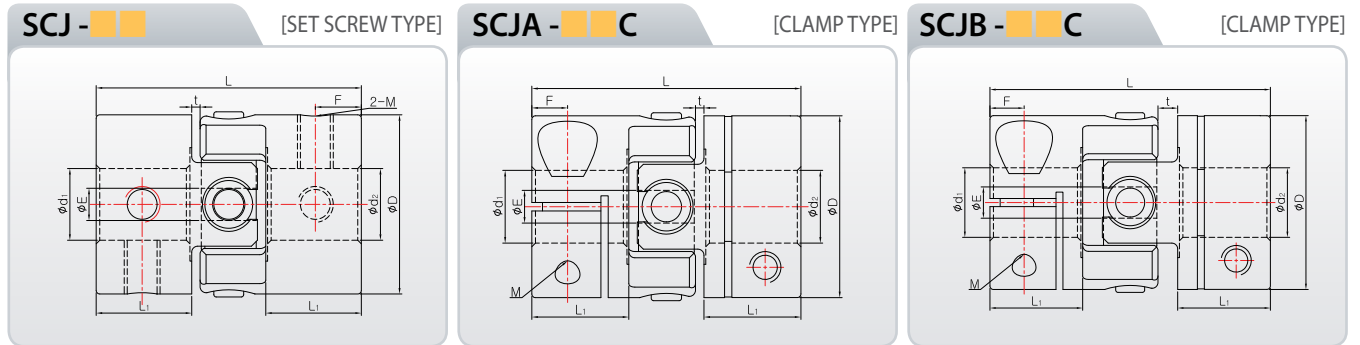

Dimensions & Performance

Product Number	Fastening Bolt M	Fastening Torque (N·m)	Max. RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
									Angle (°)	Parallel (mm)	End-Play (mm)
SCJA-15C	M2.6	1	21,000	0.5	0.25	220	3.3×10 ⁻⁷	9	1.5	0.3	0
SCJA-20C	M2.6	1	16,000	1	0.5	350	1.2×10 ⁻⁶	19	1.5	0.5	0
SCJA-25C	M3	1.7	12,000	2	1	800	3.3×10 ⁻⁶	34	1.5	0.5	0
SCJA-32C	M4	3.5	9,000	4	2	1,200	1.1×10 ⁻⁵	72	1.5	0.5	0
SCJA-40C	M5	8	7,000	10	5	1,900	3.2×10 ⁻⁵	140	1.5	0.5	0
SCJB-15C	M2.6	1	18,000	0.5	0.25	200	3.5×10 ⁻⁷	10	2	0.3	0
SCJB-20C	M2.6	1	12,000	1	0.5	300	1.3×10 ⁻⁶	20	2	0.5	0
SCJB-25C	M3	1.7	9,000	2	1	700	3.4×10 ⁻⁶	35	2	0.5	0
SCJB-32C	M4	3.5	7,000	4	2	1,000	1.2×10 ⁻⁵	75	2	0.5	0
SCJB-40C	M5	8	5,000	10	5	1,800	3.3×10 ⁻⁵	145	2	0.5	0
SCJ-15	M3	0.7	21,000	0.5	0.25	200	2.9×10 ⁻⁷	9	1.5	0.3	0
SCJ-20	M3	0.7	16,000	1	0.5	450	1.0×10 ⁻⁶	20	1.5	0.5	0
SCJ-25	M4	1.7	12,000	2	1	800	3.1×10 ⁻⁶	35	1.5	0.5	0
SCJ-32	M4	4	9,000	4	2	1,200	1.1×10 ⁻⁵	75	1.5	0.5	0
SCJ-40	M5	4	7,000	10	5	1,900	3.1×10 ⁻⁵	145	1.5	0.5	0

* Mass and mass moment of inertia are measured with max. bore size

Dimensions and Standard Inner Diameter

Product Number	Dimension (mm) (±0.3)						Dimensions and Standard Inner Diameter(d ₁ , d ₂ , unit:mm)										
	D	L	L ₁	E	t	F	3	4	5	6	6.35	8	10	11	12	14	15
SCJA-15C	15	22.2	8	2.7	0.7	2.95	●	●	●	●							
SCJA-20C	20	23.4	7.9	4.2	0.8	2.75		●	●	●	●	●					
SCJA-25C	25	30.4	10.4	5.2	1.3	3.55			●	●	●	●	●				
SCJA-32C	32	39	13.5	8.2	1.6	4.4				●	●	●	●	●	●	●	
SCJA-40C	40	45.6	16	10	1.8	5.9						●	●	●	●	●	●
SCJB-15C	15	24.2	8	2.7	1.7	2.95	●	●	●	●	●						
SCJB-20C	20	26.4	7.9	4.2	2.3	2.75		●	●	●	●	●					
SCJB-25C	25	33.4	10.4	5.2	2.8	3.55			●	●	●	●	●				
SCJB-32C	32	43	13.5	8.2	3.6	4.4				●	●	●	●	●	●	●	
SCJB-40C	40	51	16	10	4.5	5.9						●	●	●	●	●	●
SCJ-15	15	22.2	8	2.7	0.7	3.85	●	●	●	●	●						
SCJ-20	20	23.4	7.9	4.2	0.8	3.75		●	●	●	●	●					
SCJ-25	25	30.4	10.4	5.2	1.3	4.95			●	●	●	●	●				
SCJ-32	32	39	13.5	8.2	1.6	6.55				●	●	●	●	●	●	●	
SCJ-40	40	45.6	16	10	1.8	7.8						●	●	●	●	●	●

- For the inner diameter, INCH type is available
- Nonstandard inner diameter is also available
- Keyway is available
- The recommendation for shaft tolerance is h7.

SRG Series

Miniature Rigid Coupling




'SI. CO' mark(Trademark : 40-2012-0061376) indicates that the authenticity is certified.

SUNGIL's small precise Rigid coupling has a One-Piece structure. It is used to connect two shafts as a joint, and shows excellent performance in any conditions (low or high speed, high torque and etc). However, it does not accept misalignments such as parallel, angular misalignment and end-play because it is might be deformed thereby. Therefore, to protect the coupling and machine, please use after arranging shafts perfectly.



Features

- Zero Backlash
- Identical CW/CCW rotational performance
- High torsional stiffness, High allowable torque
- One-piece type
- Precise concentricity
- No allowable misalignment

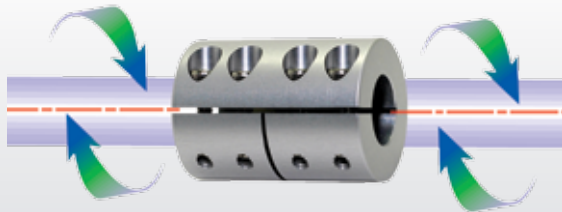

Structure and material

SRG - ■ ■




(SET SCREW TYPE)

SRG - ■ ■ C




(CLAMP TYPE)


SRGL - ■ ■ C



(LONG CLAMP TYPE)

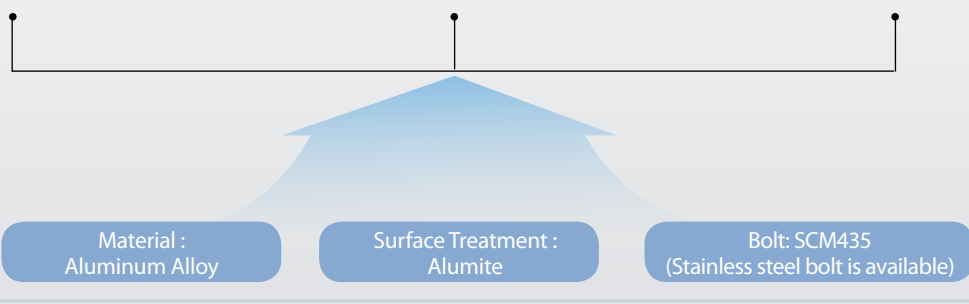




How to order product

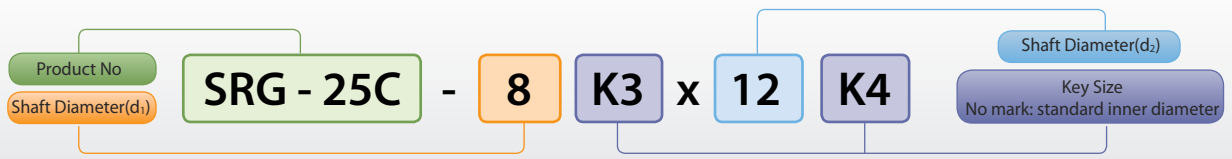

※ Please mark each inner diameter size.
 ※ For clamp type SRG model, split hub is available, but the lead time must be checked.

SRG Series Miniature Rigid Coupling

Please, download CAD DATA from www.sungilfa.com

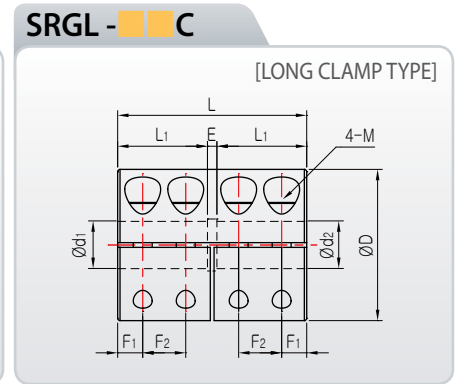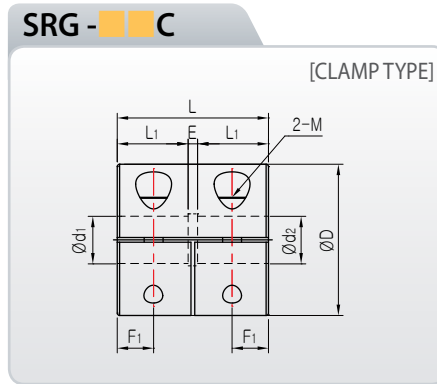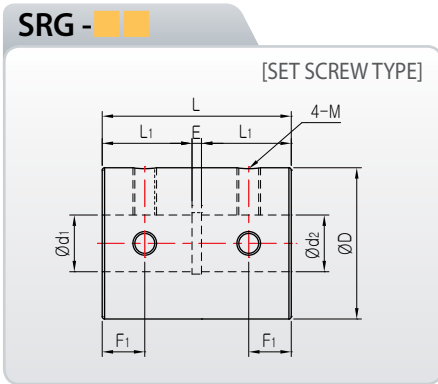

Dimensions & Performance

Product Number	Dimension (mm) (±0.3)						Fastening Bolt M	Fastening Torque (N·m)	Max·RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Moment of Inertia (kg·m ²)	Mass (g)
	D	L	L ₁	E	F ₁	F ₂							
SRG-16	16	22.5	10.25	2	5	-	M3	0.7	25,000	0.6	0.3	3.9 × 10 ⁻⁷	10
SRG-20	20	24	11	2	5.5	-	M3	0.7	20,000	1	0.5	9.7 × 10 ⁻⁷	15.4
SRG-25	25	35	16.5	2	7.5	-	M4	1.7	18,000	2	1	3.5 × 10 ⁻⁶	36
SRG-32	32	40	19	2	9	-	M5	4	14,000	4	2	1.1 × 10 ⁻⁵	69
SRG-43	43	52	25	2	12	-	M6	7	12,000	9	4.5	4.6 × 10 ⁻⁵	153
SRG-53	53	66	32	2	15.5	-	M8	15	8,000	22	11	1.4 × 10 ⁻⁴	316
SRG-16C	16	16	7	2	3.7	-	M2.6	1	18,000	0.6	0.3	2.5 × 10 ⁻⁷	6.8
SRG-20C	20	20	9	2	4.6	-	M2.6	1	15,000	1	0.5	7.5 × 10 ⁻⁷	12
SRG-25C	25	25	11.5	2	5.8	-	M3	1.7	12,000	2	1	2.3 × 10 ⁻⁶	24
SRG-32C	32	32	15	2	7.6	-	M4	3.5	10,000	4	2	8.0 × 10 ⁻⁶	52
SRG-43C	43	41	19.5	2	10	-	M5	8	8,000	9	4.5	3.3 × 10 ⁻⁵	114
SRG-53C	53	51	24.5	2	12.5	-	M6	13	6,000	22	11	9.2 × 10 ⁻⁵	234
SRGL-16C	16	22.5	10.25	2	3	5.4	M2.6	1	16,000	0.8	0.4	3.4 × 10 ⁻⁷	9.3
SRGL-20C	20	24	11	2	3.1	5.6	M2.6	1	14,000	1.2	0.6	8.6 × 10 ⁻⁷	14
SRGL-25C	25	35	16.5	2	4.7	7.6	M3	1.7	10,000	2.4	1.2	3.2 × 10 ⁻⁶	34
SRGL-32C	32	40	19	2	5.3	9.1	M4	3.5	9,000	4.8	2.4	9.8 × 10 ⁻⁶	63
SRGL-43C	43	52	25	2	7	11.5	M5	8	7,000	10	5	4.1 × 10 ⁻⁵	141
SRGL-53C	53	66	32	2	9	14.5	M6	13	5,500	24	12	1.3 × 10 ⁻⁴	297

- For the inner diameter, INCH type is available
- Nonstandard inner diameter is also available
- Keyway is available
- The recommendation for shaft tolerance is h7.
- * Mass and mass moment of inertia are measured with max. bore size

Standard Inner diameter

Product Number	Standard Inner Diameter(d ₁ , d ₂ , unit:mm)															
	3	4	5	6	8	10	11	12	14	15	16	18	20	22	24	25
SRG-16 / SRG-16C / SRGL-16C	●	●	●	●												
SRG-20 / SRG-20C / SRGL-20C		●	●	●	●	●										
SRG-25 / SRG-25C / SRGL-25C			●	●	●	●	●									
SRG-32 / SRG-32C / SRGL-32C				●	●	●	●	●	●							
SRG-43 / SRG-43C / SRGL-43C						●	●	●	●	●	●	●	●	●		
SRG-53 / SRG-53C / SRGL-53C							●	●	●	●	●	●	●	●	●	

SFC Series

Flexible Coupling

'SI. CO' mark(Trademark : 40-2012-0061376) indicates that the authenticity is certified.




2006 Venture Design Award


Features

- Excellent absorbability in misalignment
(eccentricity, angular misalignment, end-play)
- Absorbs impact and vibration
- No lubrication
- Low moment of inertia


※ Patent /Utility model : 20-0241950

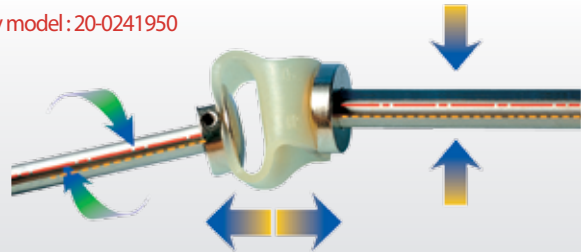

SFC 29, 38

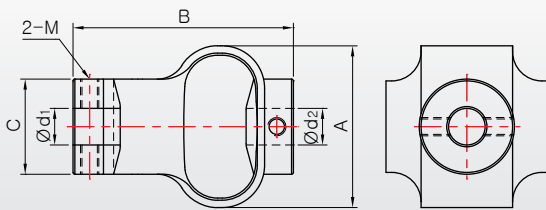

SFC 48, 54

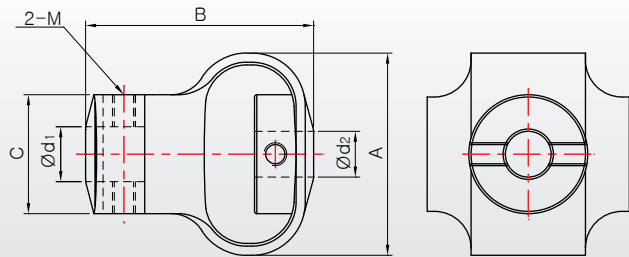

Dimensions & Performance

Product Number	Dimension (mm)(±0.3)			Fastening Bolt M	Fastening Torque (N·m)	Mass (g)	Max· RPM (min ⁻¹)	Max Torque (N·m)	Permissible Angular misalignment (°)	Permissible Parallel misalignment (mm)	End-Play (mm)
	A	B	C								
SFC-29	25	28	18	M4	1.7	19	3,000	0.35	10	2	1.5
SFC-38	32	35	22.5	M4	1.7	38	3,000	1.35	10	2.5	2
SFC-48	43	50	26	M5	4	60	3,000	1.8	12	2.5	2
SFC-54	50	59	29.5	M6	7	140	3,000	4.5	12	3	2

Standard Inner diameter

Product Number	Standard Inner diameter (d ₁ , d ₂) Standard INNER Diameter (mm)									
	4	5	6	8	10	12	14	15	16	
SFC-29	●	●	●	●	●					
SFC-38			●	●	●	●				
SFC-48				●	●	●	●			
SFC-54					●	●	●	●	●	

※ Please contact us when you order a product which is not a standard inner diameter

How to order product



※ For INNER diameter, key type is not available for SFC type

※Please mark each inner diameter size.

※Please contact us when you order

SJC Series

Zero Backlash Jaw Coupling




'SI, CO' mark(Trademark : 40-2012-0061376) indicates that the authenticity is certified.
'SJC' (Trademark : 40-2012-0044881) is the original trademark for SUNGIL's Jaw Coupling.

SUNGIL's Jaw coupling has a unique hub and sleeve structure, so it has maximized the advantages of zero backlash metallic coupling and common coupling with rubber elastic material.





Features

- Structure is manufactured with pre-load on Sleeve
- Zero backlash (low operational torque environment)
- Excellent durability and torsional stiffness
- Absorbs parallel and angular misalignment and vibration through Sleeve
- Identical CW and CCW rotational characteristics
- Oil resistance, electric insulation
- Operational temperature: -30°C~120°C
- Several holes are machined hub's inside surface for the well-balanced product

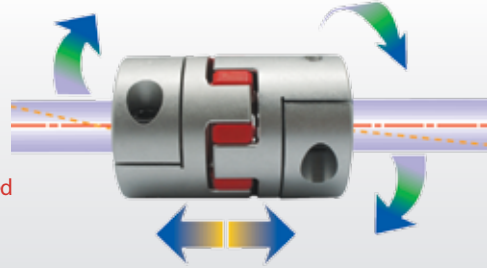

Sleeve

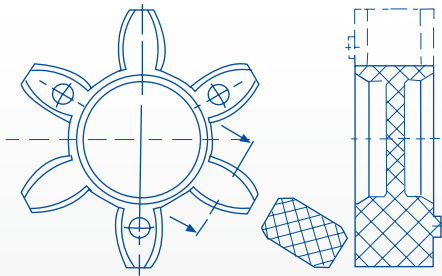

※ SUNGIL's sleeve is different from other sleeves because the center is non-penetrative. The teeth are made in a form shape by considering the dimensions (tolerance) of them very carefully, so there is no clearance and backlash on operation
 ※ There is penetrative sleeve that is machined after molding for easy assembly

※ S : Distance that absorbs axial-direction impact. Sungil's Jaw coupling is assembled with special tools for the uniform distance.



Out Diameter Size $\varnothing 14 \sim \varnothing 30$


Out Diameter Size $\varnothing 40$

Out Diameter Size $\varnothing 48 \sim \varnothing 100$

Application

- Position controlling-positioning
- Robot system
- Boring and grinding machine
- Machining center (machine tool)
- Medical equipment
- Servo Motor
- X-Y and X-Y-Z axle driving
- Reduction geared motor

Structure & Material

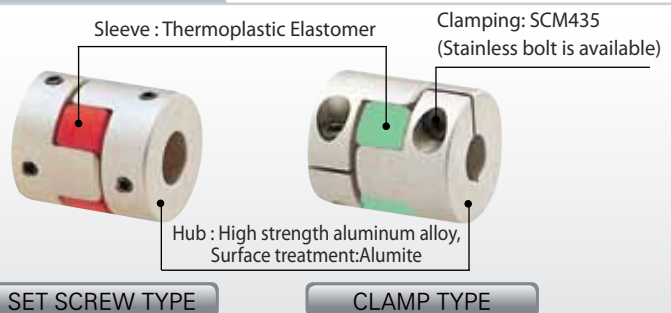

SET SCREW TYPE

CLAMP TYPE

SJC Series

Zero Backlash Jaw Coupling

Selection Method

SJC coupling has 2 different usages. One for transmitting angular rotation with zero backlash and another for transmitting extremely high torque. Choose the appropriate coupling because we have 2 different sleeves with different physical characteristics.

1. To transmit rotation with zero backlash mainly

In order to transmit angular rotation and control for the main purpose in low torque range, the same characteristic, metal spring coupling having zero backlash can be used. In addition, it can absorb torsional vibration which you cannot get from general couplings. To use for zero backlash, the operating torque is less than the rated torque on the table. (Refer to the table below) For zero backlash, the permissible torque is the same for 2 sleeves. However, for accurate transmission concerning necessary responsiveness, higher strength is required for sleeves.


2. To transmit extremely high torque mainly

SJC type coupling can be used for higher torque compared with metal coupling because it transmits torque by compressing sleeve. Therefore, it can be applied to general industrial machines such as pump that does not need zero backlash seriously. SJC couplings sleeves are offered in two different types, green sleeve which has lower strength is used in lower rated and maximum torque condition, while a red sleeve has higher values. On the contrary, the green sleeve's misalignment permissible value is higher than the red sleeve's and thus, this type of sleeve is more suitable for absorbing vibration or impact. So, select the proper sleeve for your use.

Sleeve			Fastening way	
Hardness (Shore D)	Color	Material	SET SCREW TYPE	CLAMP TYPE
55D (98A)	Green	Hytrel	SJC - ㉔ ㉔ - GR	SJC - ㉔ ㉔ C - GR
64D	Red	Hytrel	SJC - ㉔ ㉔ - RD	SJC - ㉔ ㉔ C - RD

Product Number	Sleeve Hardness	For Zero Backlash (N·m)	Rated Torque (N·m)	Max Torque (N·m)	Torsional Stiffness (N·m/rad)	Permissible Parallel Misalignment (mm)	Permissible Parallel Misalignment (°)	Permissible End-play (mm)
SJC-14	GR 55D (98A)	0.2	1.6	3.6	20	0.05	1.0	+0.6
	RD 64D		2	4	30	0.03		-0.2
SJC-20	GR 55D (98A)	0.2	4	8	40	0.07	1.0	+0.8
	RD 64D		5	10	65	0.05		-0.3
SJC-25	GR 55D (98A)	0.35	8	10	180	0.07	1.0	+1.0
	RD 64D		10	20	220	0.05		-0.4
SJC-30	GR 55D (98A)	0.5	10	20	180	0.08	1.0	+1.0
	RD 64D		14	28	220	0.06		-0.5
SJC-40	GR 55D (98A)	1.2	16	32	1,200	0.06	1.0	+1.2
	RD 64D		18	36	2,000	0.04		-0.6
SJC-48	GR 55D (98A)	-	35	70	1,800	0.08	1.0	+1.3
	RD 64D		45	90	3,600	0.05		-0.6
SJC-55	GR 55D (98A)	-	45	90	2,500	0.09	1.0	+1.4
	RD 64D		60	120	4,000	0.06		-0.6
SJC-65	GR 55D (98A)	-	120	240	4,000	0.1	1.0	+1.5
	RD 64D		180	360	8,000	0.08		-0.6
SJC-80	GR 55D (98A)	-	240	480	10,000	0.1	1.0	+1.5
	RD 64D		320	640	20,000	0.08		-0.6
SJC-100	GR 55D (98A)	-	300	600	20,000	0.15	1.0	+2.0
	RD 64D		600	1,200	40,000	0.1		-0.6


How to order product

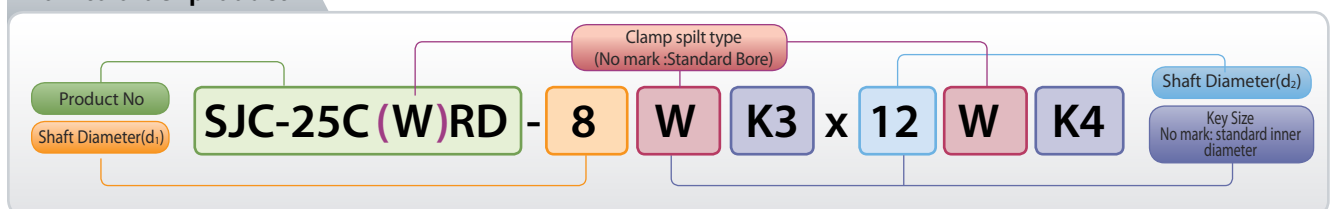

- ※ Please mark each inner diameter size.
- ※ When you order 'penetrate-type sleeve', please mark 'penetrate-type'.
- ※ The following is the size of the inner diameter of penetrate-type sleeves.
SJC-14=Ø4.5, SJC-20=Ø7, SJC-25=Ø7.6, SJC-30=Ø9.6, SJC-40=Ø15.5, SJC-55=Ø25.3, SJC-65=Ø26.7, SJC-80=Ø30.8, SJC-100=Ø50.5
- ※ Clamp split type is available for SJC-B-30C, SJC-40C, SJC-55C, SJC-65C, SJC-80C and SJC-100C. Please mark 'W' right behind the bore diameter where you want to separate.

SJC Series Zero Backlash Jaw Coupling

Please, download CAD DATA from www.sungilfa.com

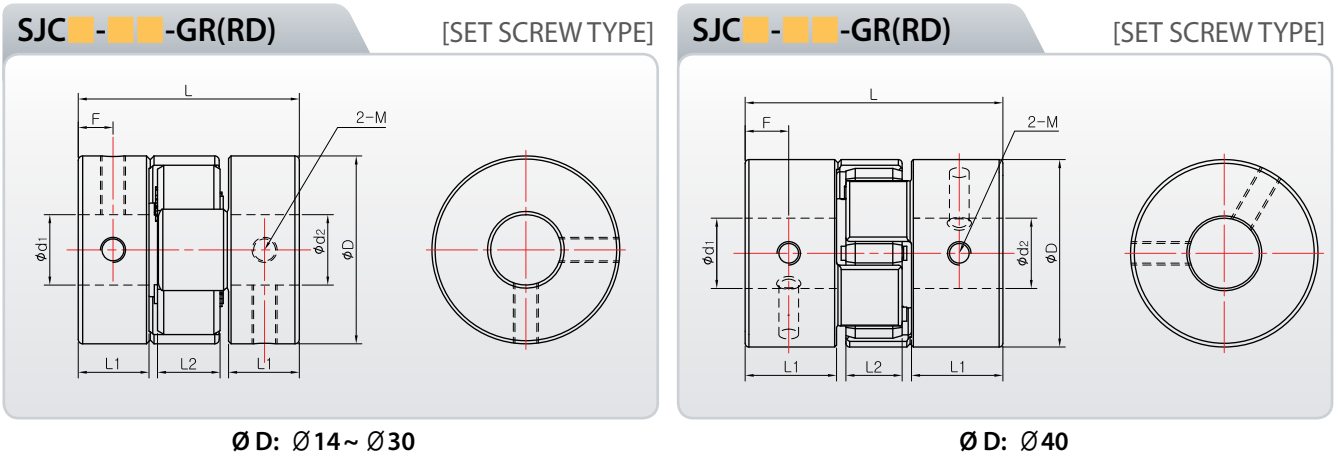

Dimensions & Performance

Product Number	Dimension (mm)(±0.3)					Fastening Bolt M	Fastening Torque (N·m)	Max. RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	L	L ₁	L ₂	F									Angle (°)	Parallel (mm)	End-Play (mm)
SJC-14 GR	14	22	7	6	3.45	M3	0.7	27,000	3.2	1.6	20	1.9×10 ⁻⁷	6.7	1.0	0.05	+0.6 -0.2
SJC-20 GR	20	30	10	8	4.65	M3	0.7	19,000	8	4	40	1.0×10 ⁻⁶	18.3	1.0	0.07	+0.8 -0.3
SJC-25 GR	25	31.25	10	9	4.95	M4	1.7	15,000	16	8	180	2.7×10 ⁻⁶	30	1.0	0.07	+1.0 -0.4
SJCA-30 GR	30	35.3	11.3	10	5.55	M4	1.7	13,000	20	10	180	6.2×10 ⁻⁶	46	1.0	0.08	+1.0 -0.4
SJCB-30 GR	30	44.7	16	10	7.25	M4	1.7	13,000	20	10	180	8.2×10 ⁻⁶	60	1.0	0.08	+1.0 -0.4
SJCA-40 GR	40	55	19.5	12	9.3	M5	4	9,600	32	16	1,200	3.3×10 ⁻⁵	132	1.0	0.06	+1.2 -0.5
SJCB-40 GR	40	66	25	12	11.6	M5	4	9,600	32	16	1,200	4.0×10 ⁻⁵	163	1.0	0.06	+1.2 -0.5
SJC-14 RD	14	22	7	6	3.45	M3	0.7	27,000	4	2	30	2.1×10 ⁻⁷	6.7	1.0	0.03	+0.6 -0.2
SJC-20 RD	20	30	10	8	4.65	M3	0.7	19,000	10	5	65	1.0×10 ⁻⁶	18.4	1.0	0.05	+0.8 -0.3
SJC-25 RD	25	31.25	10	9	4.95	M4	1.7	15,000	20	10	220	2.4×10 ⁻⁶	30	1.0	0.05	+1.0 -0.4
SJCA-30 RD	30	35.3	11.3	10	5.55	M4	1.7	13,000	28	14	220	5.9×10 ⁻⁶	46	1.0	0.06	+1.0 -0.4
SJCB-30 RD	30	44.7	16	10	7.25	M4	1.7	13,000	28	14	220	7.2×10 ⁻⁶	60	1.0	0.06	+1.0 -0.4
SJCA-40 RD	40	55	19.5	12	9.3	M5	4	9,600	36	18	2,000	3.1×10 ⁻⁵	132	1.0	0.04	+1.2 -0.5
SJCB-40 RD	40	66	25	12	11.6	M5	4	9,600	36	18	2,000	4.0×10 ⁻⁵	163	1.0	0.07	+1.2 -0.5

* Mass and mass moment of inertia are measured with max. bore size


Standard Inner diameter

Product Number	Standard Inner Diameter(d ₁ , d ₂ , unit:mm)																	
	3	4	4.5	5	6	6.35	7	8	9.525	10	11	12	14	15	16	18	19	20
SJC-14	●	●	●	●														
SJC-20		●	●	●	●	●	●	●										
SJC-25				●	●	●	●	●	●	●								
SJC-30					●	●	●	●	●	●	●	●	●					
SJC-40								●	●	●	●	●	●	●	●	●		

- For the inner diameter, INCH type is available
- Nonstandard inner diameter is also available
- Keyway is available
- The recommendation for shaft tolerance is h7.

SJC Series

Zero Backlash Jaw Coupling

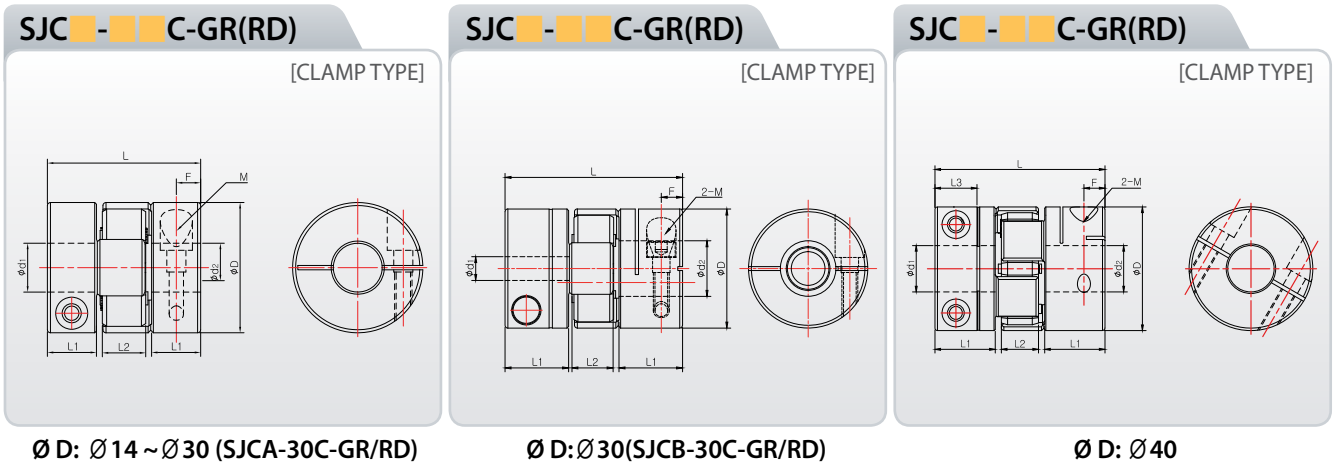

Dimensions & Performance

Product Number	Dimension (mm)(±0.3)						Fastening Bolt M	Fastening Torque (N·m)	Max. RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	L	L ₁	L ₂	L ₃	F									Angle (°)	Parallel (mm)	End-Play (mm)
SJC-14C GR	14	22	7	6	-	3.5	M2	0.5	22,000	3.2	1.6	20	1.6×10 ⁻⁷	6	1.0	0.05	+0.6 -0.2
SJC-20C GR	20	30	10	8	-	4.95	M2.6	1	15,000	8	4	40	1.1×10 ⁻⁶	19	1.0	0.07	+0.8 -0.3
SJC-25C GR	25	31.25	10	9	-	4.95	M3	1.7	13,000	16	8	180	2.4×10 ⁻⁶	25	1.0	0.07	+1.0 -0.4
SJCA-30C GR	30	35.3	11.3	10	-	5.6	M4	3.5	10,000	20	10	180	6.2×10 ⁻⁶	50	1.0	0.08	+1.0 -0.4
SJCB-30C GR	30	44.7	16	10	11.1	5.4	M4	3.5	10,000	20	10	180	7.5×10 ⁻⁶	55	1.0	0.08	+1.0 -0.4
SJCA-40C GR	40	55	19.5	12	13.6	6.8	M5	8	8,500	32	16	1,200	3.1×10 ⁻⁵	135	1.0	0.06	+1.2 -0.5
SJCB-40C GR	40	66	25	12	16.5	8.4	M5	8	8,500	32	16	1,200	3.9×10 ⁻⁵	160	1.0	0.06	+1.2 -0.5
SJC-14C RD	14	22	7	6	-	3.5	M2	0.5	22,000	4	2	30	1.6×10 ⁻⁷	6	1.0	0.03	+0.6 -0.2
SJC-20C RD	20	30	10	8	-	4.95	M2.6	1	15,000	10	5	65	1.1×10 ⁻⁶	19	1.0	0.05	+0.8 -0.3
SJC-25C RD	25	31.25	10	9	-	4.95	M3	1.7	13,000	20	10	220	2.4×10 ⁻⁶	25	1.0	0.05	+1.0 -0.4
SJCA-30C RD	30	35.3	11.3	10	-	5.6	M4	3.5	10,000	28	14	220	6.2×10 ⁻⁶	50	1.0	0.06	+1.0 -0.4
SJCB-30C RD	30	44.7	16	10	11.1	5.4	M4	3.5	10,000	28	14	220	7.5×10 ⁻⁶	55	1.0	0.06	+1.0 -0.4
SJCA-40C RD	40	55	19.5	12	13.6	6.8	M5	8	8,500	36	18	2,000	3.1×10 ⁻⁵	135	1.0	0.04	+1.2 -0.5
SJCB-40C RD	40	66	25	12	16.5	8.4	M5	8	8,500	36	18	2,000	3.9×10 ⁻⁵	160	1.0	0.04	+1.2 -0.5

* Mass and mass moment of inertia are measured with max. bore size


Standard Inner diameter

Product Number	Standard Inner Diameter (d ₁ , d ₂ , unit:mm)																	
	3	4	4.5	5	6	6.35	7	8	9.525	10	11	12	14	15	16	18	19	20
SJC-14C	●	●	●	●														
SJC-20C		●	●	●	●	●	●	●										
SJC-25C				●	●	●	●	●	●	●								
SJC-30C					●	●	●	●	●	●	●	●						
SJC-40C								●	●	●	●	●	●	●	●	●		

- For the inner diameter, INCH type is available
- Nonstandard inner diameter is also available
- Keyway is available
- The recommendation for shaft tolerance is h7.

SJC Series Zero Backlash Jaw Coupling

Please, download CAD DATA from www.sungilfa.com

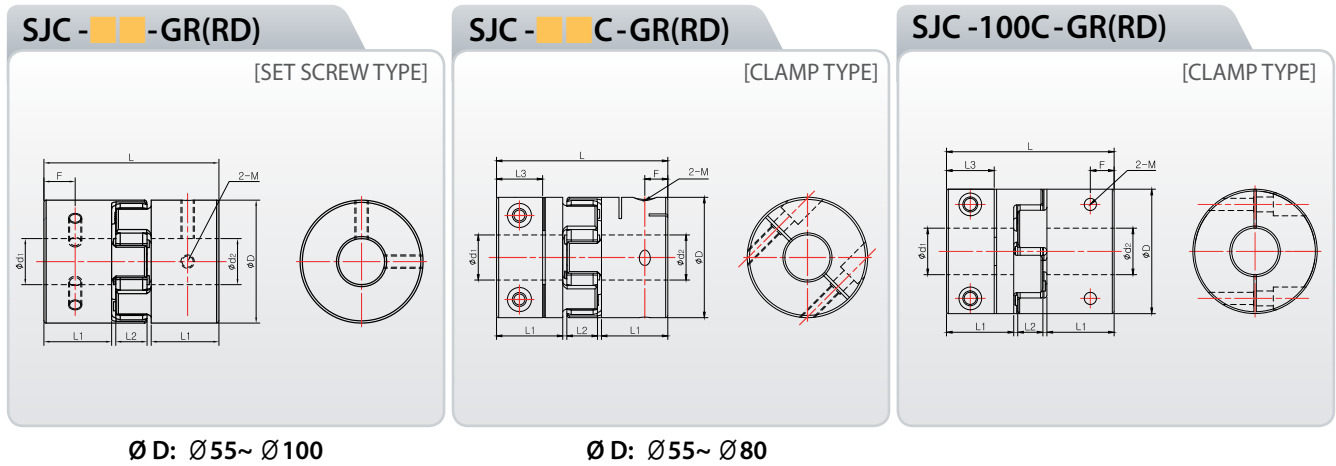

Dimensions & Performance

Product Number	Dimension (mm)(±0.3)						Fastening Bolt M	Fastening Torque (N·m)	Max·RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	L	L ₁	L ₂	L ₃	F									Angle (°)	Parallel (mm)	End-Play (mm)
SJC-55 GR	55	78.3	30.3	14	-	14	M6	7	7,500	90	45	2,500	1.7×10 ⁻⁴	344	1	0.09	+1.4 -0.5
SJC-65 GR	65	90.3	35.3	15	-	17.2	M8	15	6,000	240	120	4,000	3.7×10 ⁻⁴	535	1	0.1	+1.5 -0.6
SJC-80 GR	80	114.2	45.2	18	-	21.7	M8	15	5,000	480	240	10,000	1.1×10 ⁻³	1,150	1	0.1	+1.5 -0.6
SJC-100 GR	104	140.2	56.2	21	-	27.25	M10	25	4,000	600	300	20,000	4.8×10 ⁻³	2,650	1	0.1	+2.0 -0.6
new SJC-48C GR	48	66.8	25.3	13	17.4	9	M6	13	7,000	70	35	1,800	8.2×10 ⁻⁵	224	1	0.08	+1.3 -0.6
SJC-55C GR	55	78.3	30.3	14	21	10.5	M6	13	6,500	90	45	2,500	1.6×10 ⁻⁴	330	1	0.09	+1.4 -0.5
SJC-65C GR	65	90.3	35.3	15	25.6	12.45	M8	30	5,500	240	120	4,000	3.8×10 ⁻⁴	560	1	0.1	+1.5 -0.6
SJC-80C GR	80	114.2	45.2	18	30.2	14.7	M10	50	4,500	480	240	10,000	1.0×10 ⁻³	1,050	1	0.1	+1.5 -0.6
SJC-100C GR	104	140.2	56.2	21	39.9	19.9	M12	90	3,500	600	300	20,000	4.6×10 ⁻³	2,550	1	0.15	+2.0 -0.6
SJC-55 RD	55	78.3	30.3	14	-	14	M6	7	7,500	120	60	4,000	1.7×10 ⁻⁴	344	1	0.06	+1.4 -0.5
SJC-65 RD	65	90.3	35.3	15	-	17.2	M8	15	6,000	360	180	8,000	3.9×10 ⁻⁴	535	1	0.08	+1.5 -0.6
SJC-80 RD	80	114.2	45.2	18	-	21.7	M8	15	5,000	640	320	20,000	1.1×10 ⁻³	1,150	1	0.08	+1.5 -0.6
SJC-100 RD	104	140.2	56.2	21	-	27.25	M10	25	4,000	1,200	600	40,000	4.8×10 ⁻³	2,650	1	0.1	+2.0 -0.6
new SJC-48C RD	48	66.8	25.3	13	17.4	9	M6	13	7,000	90	45	3,600	8.2×10 ⁻⁵	224	1	0.05	+1.3 -0.6
SJC-55C RD	55	78.3	30.3	14	21	10.5	M6	13	6,500	120	60	4,000	1.6×10 ⁻⁴	330	1	0.06	+1.4 -0.5
SJC-65C RD	65	90.3	35.3	15	25.6	12.45	M8	30	5,500	360	180	8,000	3.8×10 ⁻⁴	560	1	0.08	+1.5 -0.6
SJC-80C RD	80	114.2	45.2	18	30.2	14.7	M10	50	4,500	640	320	20,000	1.0×10 ⁻³	1,050	1	0.08	+1.5 -0.6
SJC-100C RD	104	140.2	56.2	21	39.9	19.9	M12	90	3,500	1,200	600	40,000	4.6×10 ⁻³	2,550	1	0.1	+2.0 -0.6

* Mass and mass moment of inertia are measured with max. bore size


Standard Inner diameter

Product Number	Standard Inner Diameter(d ₁ , d ₂ , unit:mm)																			
	10	12	14	15	16	18	19	20	22	24	25	26	28	30	32	35	40	45	50	60
SJC-48□	●	●	●	●	●	●	●	●	●	●										
SJC-55□		●	●	●	●	●	●	●	●	●	●	●	●							
SJC-65□				●	●	●	●	●	●	●	●	●	●	●	●	●				
SJC-80□				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
SJC-100□								●	●	●	●	●	●	●	●	●	●	●	●	●

- For the inner diameter, INCH type is available
- Nonstandard inner diameter is also available
- Keyway is available
- The recommendation for shaft tolerance is h7.


SJC Series

Zero Backlash Jaw Coupling

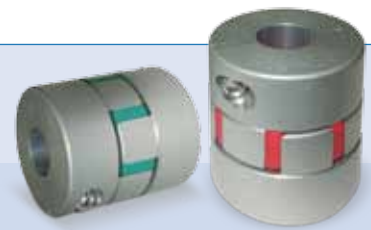

SJCM - C-GR(RD)


[CLAMP M TYPE]

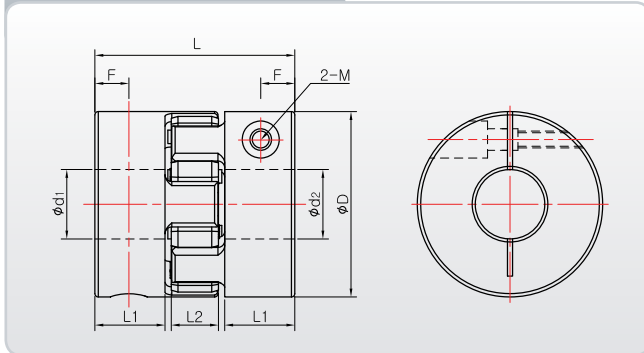

Ø D: Ø55~ Ø80

SJCM -100C-GR(RD)

[CLAMP M TYPE]

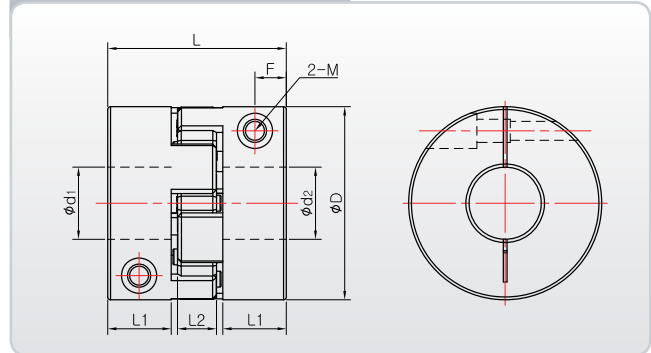

Dimensions & Performance

Product Number	Dimension (mm)(±0.3)					Fastening Bolt M	Fastening Torque (N·m)	Max-RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Permissible Misalignment		
	D	L	L ₁	L ₂	F									Angle (°)	Parallel (mm)	End-Play (mm)
SJCM-55C GR	55	59.3	20.8	14	10.1	M6	13	4,000	90	45	2,500	1.3×10 ⁻⁴	280	1	0.09	+1.4 -0.5
SJCM-65C GR	65	63.3	21.8	15	10.45	M8	30	3,500	240	120	4,000	2.6×10 ⁻⁴	400	1	0.1	+1.5 -0.6
SJCM-80C GR	80	87.2	31.7	18	15.5	M10	50	3,000	480	240	10,000	8.7×10 ⁻⁴	860	1	0.1	+1.5 -0.6
SJCM-100C GR	104	96.2	34.2	21	16.9	M12	90	3,000	600	300	7,000	3.1×10 ⁻³	1,700	1	0.15	+2.0 -0.6
SJCM-55C RD	55	59.3	20.8	14	10.1	M6	13	4,000	120	60	4,000	1.3×10 ⁻⁴	280	1	0.06	+1.4 -0.5
SJCM-65C RD	65	63.3	21.8	15	10.45	M8	30	3,500	360	180	8,000	2.6×10 ⁻⁴	400	1	0.08	+1.5 -0.6
SJCM-80C RD	80	87.2	31.7	18	15.5	M10	50	3,000	640	320	20,000	8.7×10 ⁻⁴	860	1	0.08	+1.5 -0.6
SJCM-100C RD	104	96.2	34.2	21	16.9	M12	90	3,000	1,200	600	40,000	3.1×10 ⁻³	1,700	1	0.1	+2.0 -0.6

* Mass and mass moment of inertia are measured with max. bore size

Standard Inner diameter


Product Number	Standard Inner Diameter(d ₁ , d ₂ unit:mm)																			
	10	12	14	15	16	18	19	20	22	24	25	26	28	30	32	35	40	45	50	60
SJCM-55C		●	●	●	●	●	●	●	●	●	●	●	●							
SJCM-65C				●	●	●	●	●	●	●	●	●	●	●	●	●				
SJCM-80C				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
SJCM-100C								●	●	●	●	●	●	●	●	●	●	●	●	●

■ For the inner diameter, INCH type is available

■ Nonstandard inner diameter is also available

■ Keyway is available

■ The recommendation for shaft tolerance is h7.

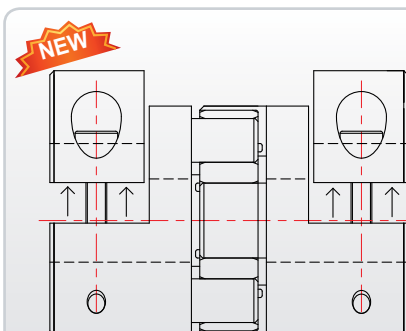

※ It is possible to order the CLAMP Split Type for outer Diameter Size Ø30-Ø100 (Ø 30 is available B TYPE)
 ※ It is impossible for SJCM series.



CLAMP SPLIT TYPE




GENERAL CLAMP TYPE

SJC Series Zero Backlash Jaw Coupling

Make to Order, Please check the lead time


SJC-■■■T

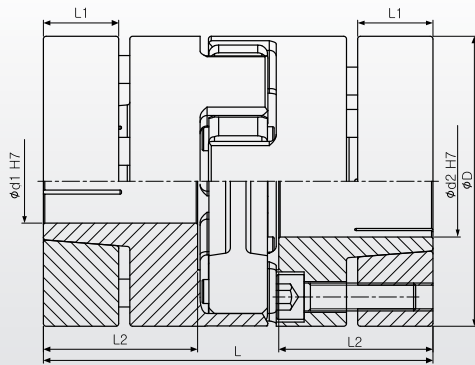

Features

- Perfect balancing
- Various inner diameter sizes
- Optimized for high speed rotation
- High clamping force (No slip without key)

Structure & Material

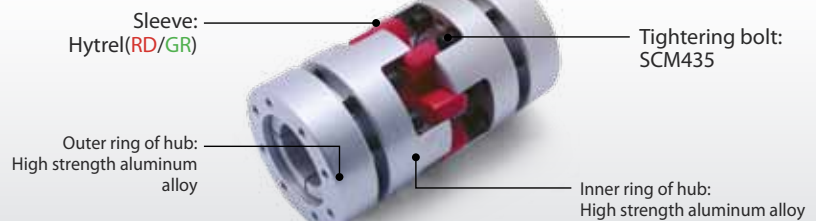

Dimensions & Performance

Model No.	Dimension (mm)(±0.3)				Fastening Bolt M	Fastening Torque (N·m)	Max-RPM (min ⁻¹)	Max Torque (N·m)	Rated Torque (N·m)	Torsional Stiffness (N·m/rad)	Moment of Inertia (kg·m ²)	Mass (g)	Misalignment tolerance		
	D	L	L ₁	L ₂									Angle (°)	Parallel (mm)	End-Play (mm)
SJC-55T-GR	55	78	16	30.3	M5	8	12,000	90	45	2,500	1.59 × 10 ⁻⁴	345	1	0.09	+1.4 -0.5
SJC-65T-GR	65	90.3	18	35.5	M5	8	10,000	240	120	4,000	3.75 × 10 ⁻⁴	536	1	0.1	+1.5 -0.6
SJC-80T-GR	80	114.2	25	45.2	M6	13	8,000	480	240	10,000	1.09 × 10 ⁻³	1043	1	0.1	+1.5 -0.6
SJC-100T-GR	104	140.2	27	56	M10	50	6,500	600	300	20,000	3.70 × 10 ⁻³	2126	1	0.15	+2.0 -0.6
SJC-55T-RD	55	78	16	30.3	M5	8	12,000	120	60	4,000	1.59 × 10 ⁻⁴	345	1	0.06	+1.4 -0.5
SJC-65T-RD	65	90.3	18	35.5	M5	8	10,000	360	180	8,000	3.75 × 10 ⁻⁴	536	1	0.08	+1.5 -0.6
SJC-80T-RD	80	114.2	25	45.2	M6	13	8,000	640	320	20,000	1.09 × 10 ⁻³	1,043	1	0.08	+1.5 -0.6
SJC-100T-RD	104	140.2	27	56	M10	50	6,500	1200	600	40,000	3.70 × 10 ⁻³	2,126	1	0.1	+2.0 -0.6

※ Torque transition ability, torsional stiffness and hardness are dependent on sleeve type(GR/RD)

Standard Inner diameter

Product Number	Standard Inner Diameter(d ₁ , d ₂ , unit:mm)																			
	10	12	14	15	16	18	19	20	22	24	25	26	28	30	32	35	38	40	45	55
SJC-55T-□□	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SJC-65T-□□	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SJC-80T-□□	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SJC-100T-□□	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

※ h7 shaft tolerance is recommended.

SJC Series

Customized & Extra Large Jaw Coupling

Examples of customized products


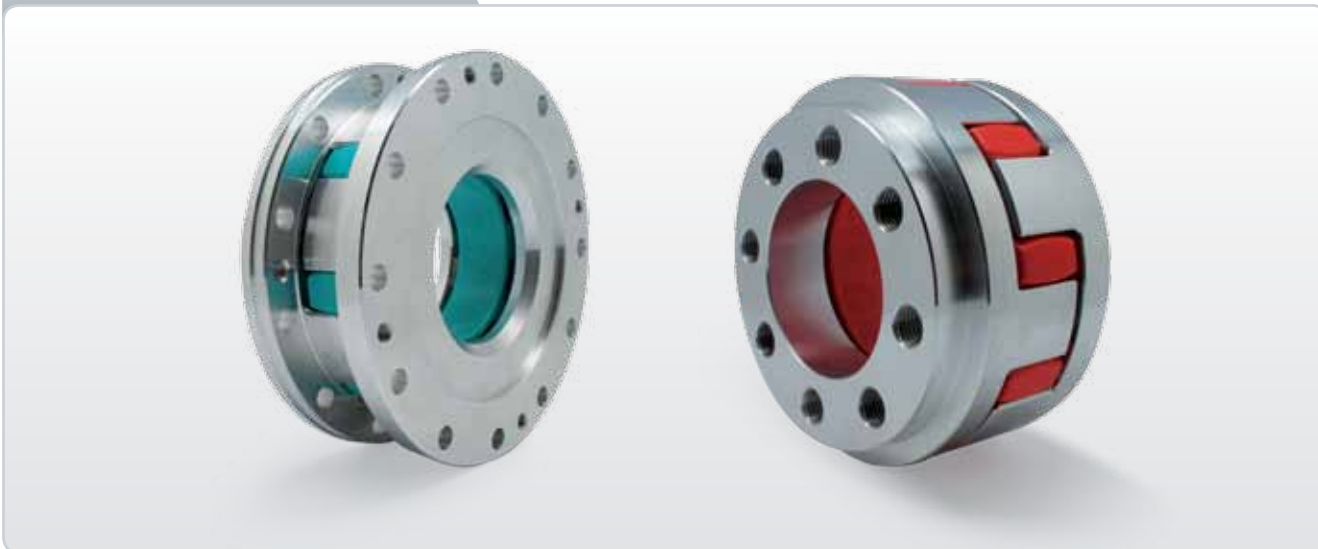


Figure of Sleeves

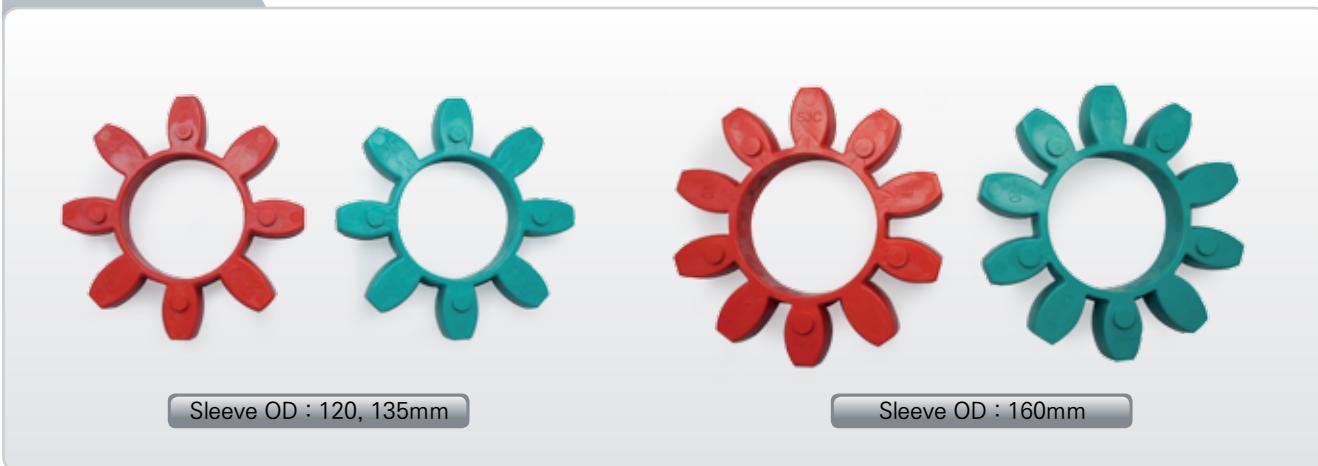

Dimensions & Performance

Outer Diameter	Sleeve Hardness	Rated Torque (N·m)	Max Torque (N·m)	Torsional Stiffness (N·m/rad)	Misalignment tolerance		
					Angle (°)	Parallel (mm)	End-Play (mm)
120	GR (Sh 98A)	620	1240	38,000	1.2	0.35	-1.0 +2.2
	RD (Sh 64D)	740	1480	95,000	1.2	0.25	-1.0 +2.2
135	GR (Sh 98A)	850	1700	43,000	1.2	0.4	-1.0 +2.6
	RD (Sh 64D)	1050	2100	105,000	1.2	0.3	-1.0 +2.6
160	GR (Sh 98A)	1700	3400	70,000	1.2	0.40	-1.5 +3.0
	RD (Sh 64D)	2100	4200	160,000	1.2	0.32	-1.5 +3.0


SHR Series

High Performance Rubber Coupling

'SI, CO' mark(Trademark : 40-2012-0061376) indicates that the authenticity is certified.

'SHR' (Trademark : 40-2012-0044880) is the original trademark for SUNGIL's High performance Rubber Coupling.

Sungil High Performance Rubber coupling is realized by optimized hub and anti-vibration rubber's design. It shows the ideal responsiveness of a servo system by high torsional stiffness and absorbability in vibrations and gain. The hub designed to increased the contact area has distributed the shear stress that applies on the anti vibration rubber. It is the best product which can transmit high torque not affected by any mechanical vibrations.

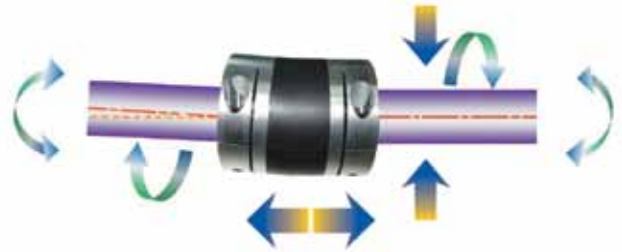

Features



- Excellent vibration absorbability
- **Excellent positioning in high gain of servo motor**
- Stable in high rotation speed
- CW and CCW rotational characteristics are identical
- Electric insulation
- High torsional stiffness
- High permissible torque

Application


- Servo motor
- Stepping motor
- General-purpose motor
- Precise Position controlling system
- X-Y table drive, Precise measuring instrument
- Index table



Structure & Material



※ Registration of patent : 10-1165885
 ※ Registration of design : 30-0593190 and its similar design

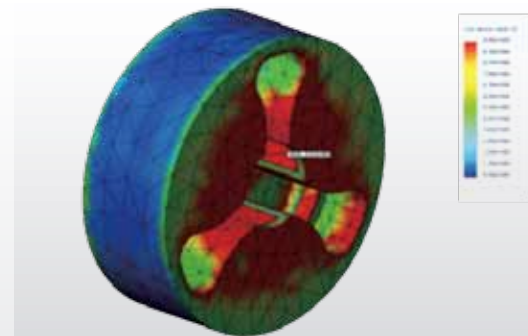


- High torsional stiffness and permissible torque value of SGF is realized by an optimal design of Anti-Vibration rubber with CAE.
 - To avoid the stress concentration on the hub's leg which contacts with the rubber medium, we rounded the legs.

Chemical Resistance of HNBR

Aging Resistance, Weather Resistance, Ozone Resistance	◎
Gasoline, Light Oil	○~◎
Water, Organic Acid, Alcohol	◎
Strong, Weak Alkali	◎
Acetic Ethyl, Ether	×~△

◎ : Excellent, ○ : Usable,
 △ : Usable under certain conditions, × : Unusable

How to order product

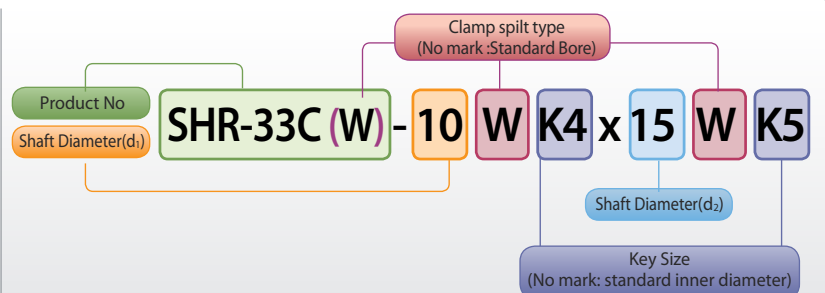


※ Please mark each inner diameter size.
 ※ Clamp split hub is also available. (Please mark 'W' right behind the inner bore you want to separate)

SHR Series

High Performance Rubber Coupling

SHR- C

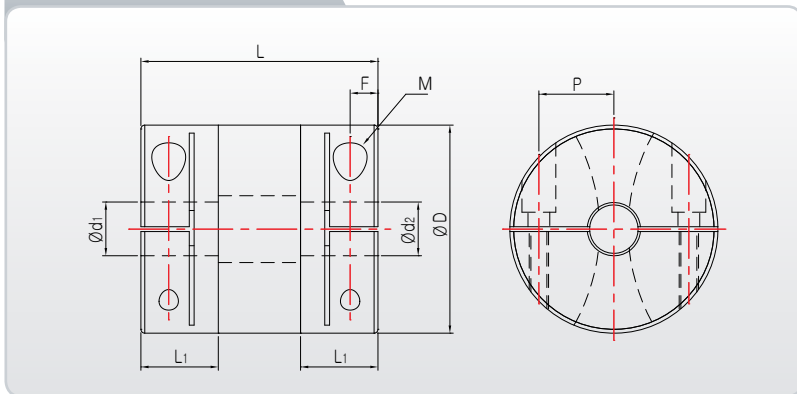

Dimensions & Performance

Product Number	Dimension (mm)(±0.3)					Fastening Bolt M	Fastening Torque (N [^] m)
	D	L	L ₁	F	P		
SHR-14C	13.8	22.4	6.7	2.05	4.5	M1.6	0.3
SHR-18C	17.8	25.5	7.95	2.65	6.1	M2	0.6
SHR-24C	23.8	31.2	9.6	3.1	8.5	M2.6	1.1
SHR-29C	28.8	35	11	3.7	10.5	M3	1.8
SHR-33C	32.8	37	12	3.8	11.75	M3	1.8
SHR-38C	37.8	47	15.5	4.55	14	M4	3.7
SHR-43C	42.8	48	15.5	4.75	15.5	M4	3.7
SHR-55C	54.8	59	19.5	5.5	19.5	M5	8.5

Product Number	Max Inner Dia (mm)	Rated Torque (N·m)	Max Torque (N·m)	Max RPM (min ⁻¹)	Moment of Inertia (kg·m ²)	Static Torsional Stiffness (N·m/rad)	Mass (g)	Permissible Misalignment		
								Angle (°)	Parallel (mm)	End-Play (mm)
SHR-14C	6	1.0	2.0	42,000	1.6 × 10 ⁻⁷	41	6	1.5	0.15	±0.2
SHR-18C	8	1.9	3.8	33,000	4.9 × 10 ⁻⁷	84	11	1.5	0.15	±0.2
SHR-24C	12	3.5	7	25,000	1.9 × 10 ⁻⁶	162	22	1.5	0.15	±0.2
SHR-29C	15	5.7	11.4	21,000	4.4 × 10 ⁻⁶	209	34	1.5	0.20	±0.3
SHR-33C	16	7	14	18,000	8.3 × 10 ⁻⁶	370	51	1.5	0.20	±0.3
SHR-38C	20	12	24	16,000	1.8 × 10 ⁻⁵	479	78	1.5	0.20	±0.3
SHR-43C	20	16	32	14,000	3.2 × 10 ⁻⁵	610	115	1.5	0.20	±0.3
SHR-55C	25	31.5	63	11,000	1.1 × 10 ⁻⁴	1430	250	1.5	0.20	±0.3

SHR Series High Performance Rubber Coupling

Please, download CAD DATA from www.sungilfa.com

Standard Inner diameter

Product Number	Stock Bores							
	Standard Inner diameter (d ₁ ,d ₂) Standard Inner Diameter(mm)							
SHR-14C	3×4	3×5	4×4	4×5	4×6	4.5×5	5×5	5×6
	6×6							
SHR-18C	4×4	4×5	4×6	5×5	5×6	5×7	5×8	6×6
	6×6.35	6×7	6×8	6.35×8	8×8			
SHR-24C	5×5	5×6	5×8	6×6	6×8	6×10	6×11	6×12
	6.35×8	6.35×10	8×8	8×10	8×11	8×12	10×10	10×12
	12×12							
SHR-29C	6×6	6×8	6×10	8×8	8×10	8×11	8×12	8×14
	8×15	10×10	10×11	10×12	10×14	10×15	11×12	12×12
	12×14	12×15	14×14	14×15	15×15			
SHR-33C	8×8	8×10	8×11	8×12	8×14	8×15	10×10	10×11
	10×12	10×14	10×15	11×11	11 X 12	12×12	12×14	12×15
	14×14	14×15	15×15	16×16				
SHR-38C	8×8	8×10	8×12	10×10	10×12	10×14	10×15	10×16
	12×12	12×14	12×15	12×16	12×19	12×20	14×14	14×15
	14×16	15×15	15×16	15×19	16×16	17×17	20×20	
SHR-43C	10×10	10×12	10×14	12×12	12×14	12×15	12×16	12×19
	14×14	14×15	14×16	14×19	15×15	15×16	15×19	15×20
	16×16	16×19	17×17	19×20	20×20			
SHR-55C	12×12	12×14	14×14	14×15	14×16	15×15	15×19	15×20
	15×25	19×20	19×24	20×20	20×25	24×25	25×25	

- Hexagonal socket headed bolts are included in every product
- We recommend h7 for shaft tolerance.
- Non-standard inner diameter or keyway is available
- Please contact us for nonstandard inner diameter before ordering Slip Torque
- About each inner diameter size, sometimes slip torque can be smaller than max torque.
- Please contact us about detail information.

Correction factor according to Temperature

Ambient temperature	-20°C ~ 30°C	30°C ~ 40°C	40°C ~ 60°C	60°C ~ 80°C
Correction factor	1	0.8	0.7	0.55

- No correction is needed for rated torque and maximum torque under load fluctuation.
- When the ambient temperature exceeds 30°C, you need to correct the rated and maximum torque by using the correction factor in the table above.
- Operational temperature is from -20°C to 80°C.

Connecting Shaft



Sungil Connecting Shaft

Features

1. Have largest kinds of products domestically : Jaw coupling type, disk coupling type
2. Middle shaft has perfect straightness and concentricity
3. Realized low mass and low moment of inertia by using high stiffness aluminum alloy
4. Can be used with various kinds of fastening methods
5. Excellent in balancing performance
6. Increased convenience of long-distance connection and reduced cost

Use

- Pump system
- Gantry system
- Linear module
- Screw Jack system
- Lifting, printing machine
- Machine tool and special use machine

How to install

1. Line up each axis which has to be connected
 - Misalignment(eccentricity, angular misalignment, end-play) over tolerance between both end axis can shorten connecting shaft's lifetime and cause severe vibration and noise.
 - Check each connecting shaft's model number and its misalignment tolerance
 - If you have any difficulties with axis line-up, contact Sungil Machinery Co., Ltd.
2. Install connecting shaft.
 - Remove foreign substances on each axis and inner diameter of hub.
 - Fasten the fastening bolts with torque wrench.

SJCL Series


Sungil Jaw Coupling Long Type

'SI. CO' mark (trademark application : 40-2012-0061376) indicates Sungil's original product certified with authenticity.
 'SJC' (trademark application : 40-2012-0044881) is the trademark of Sungil's JAW coupling.




Characteristics

- Transmits high torque
- High precision concentricity and straightness
- Perfect balancing due to manufacturing a hole inside hubs
- Split coupling hub is available
- Easy to assemble and disassemble
- Low moment of inertia due to aluminum alloy material
- 2 type sleeves (GR-55D, RD-64D) can be used
- Absorbs vibration
- Zero backlash

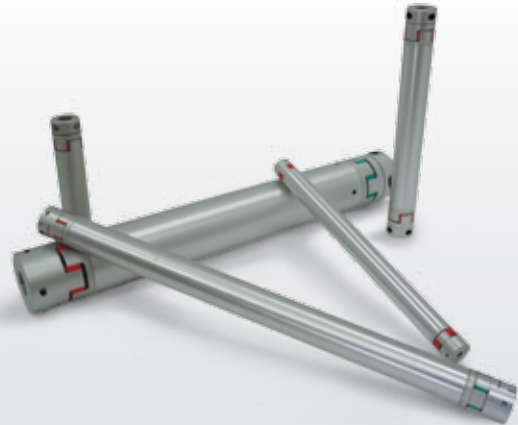


Structure and Material

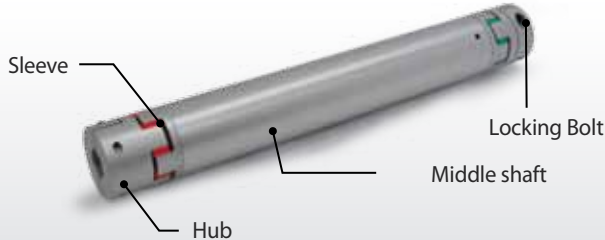

Parts	Raw Material	Surface Treatment
Hub	High stiffness aluminum alloy	Alumite
Outer Ring	GR (Hytrell, Sh 98A)	-
	RD (Hytrell, Sh 64D)	
Middle shaft	High stiffness aluminum alloy	Alumite
Bolt	SCM 435 (SUS Bolt is also available)	-

How to order product

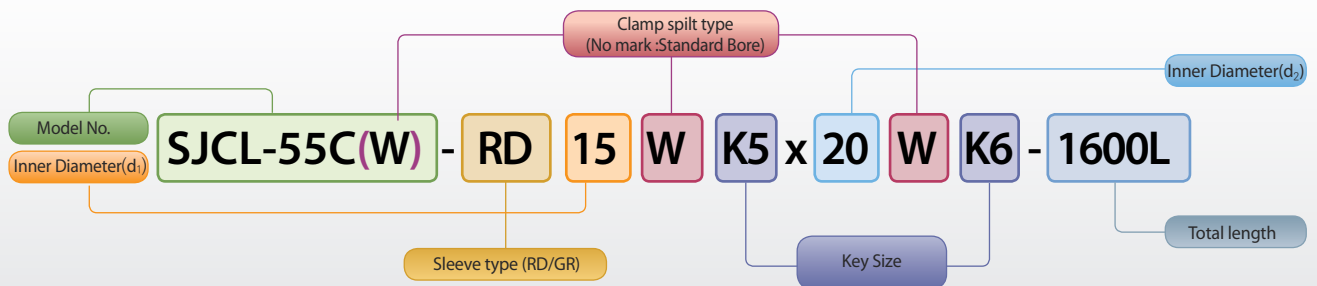


- ※ Contact us for longer length than given max. length (2000mm).
- ※ Specify each bore diameter and sleeve type when ordering.
- ※ Clamp split hub is also available. (Please mark 'W' right behind the inner bore you want to separate)
- ※ Contact us for Set-Screw type.



SJCL Series

Sungil Jaw Coupling Long Type

SJC L C

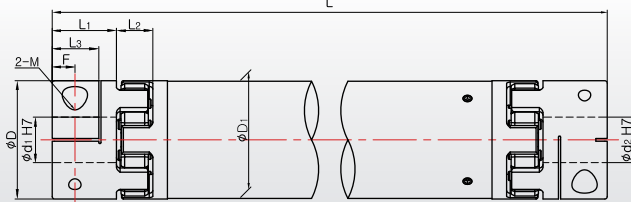

SJC L CW [SPLIT HUB TYPE]

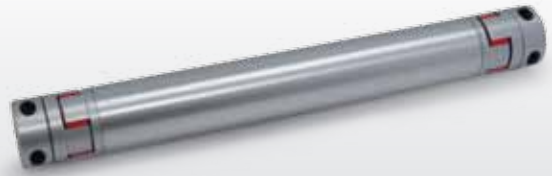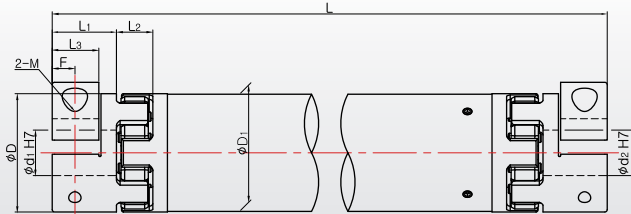

Dimension and performance

Model	Dimension [mm](±0.3)						Clamping Bolt	Tightening Torque [N·m]	length (L)		Rated Torque [N·m]	Max Torque [N·m]	Max Rot. Speed [rpm]	Torsional Stiffness [N·m/rad]		Mass Moment of Inertia		Allowable Misalignment		
	D	D1	L1	L2	L3	F			Min	Max				Coupling	Pipe per m	Coupling [kg·m ²]	Pipe per m [kg·m ²]	Parallel [mm/m]	Angular [deg]	End-play [mm]
SJCBL-30□□-GR	30	29.5	15.8	12.4	11.1	5.4	M4	3.5	95	2,000	10	20	1,500	180	1,380	7.5 x 10 ⁻⁶	1.58 x 10 ⁻⁴	5	2	± 1.0
SJCBL-40□□-GR	40	39.5	25	16	16.5	8.4	M5	8	130	2,000	16	32	1,500	1,200	3,800	3.9 x 10 ⁻⁵	4.31 x 10 ⁻⁴	5	2	± 1.0
SJCL-55□□-GR	55	54.5	30.3	18	21	10.5	M6	13	175	2,000	45	90	1,500	2,500	11,150	1.6 x 10 ⁻⁴	1.25 x 10 ⁻³	5	2	± 1.0
SJCL-65□□-GR	65	64.5	35.3	20	25.6	12.45	M8	30	200	2,000	120	240	1,500	4,000	19,310	3.8 x 10 ⁻⁴	2.16 x 10 ⁻³	5	2	± 1.0
SJCL-80□□-GR	80	79.5	45.2	24	30.2	14.7	M10	30	245	2,000	240	480	1,500	10,000	37,840	1.0 x 10 ⁻³	4.22 x 10 ⁻³	5	2	± 1.0
SJCL-100□□-GR	104	50.5	56.2	21	39.9	19.9	M12	90	300	1,400	300	600	1,500	20,000	100,000	4.6 X 10 ⁻³	4.2 X 10 ⁻²	5	2	±1
SJCBL-30□□-RD	30	29.5	15.8	12.4	11.1	5.4	M4	3.5	95	2,000	14	28	1,500	220	1,380	7.5 x 10 ⁻⁶	1.58 x 10 ⁻⁴	5	2	± 1.0
SJCBL-40□□-RD	40	39.5	25	16	16.5	8.4	M5	8	130	2,000	18	36	1,500	2,000	3,800	3.9 x 10 ⁻⁵	4.31 x 10 ⁻⁴	5	2	± 1.0
SJCL-55□□-RD	55	54.5	30.3	18	21	10.5	M6	13	175	2,000	60	120	1,500	4,000	11,150	1.6 x 10 ⁻⁴	1.25 x 10 ⁻³	5	2	± 1.0
SJCL-65□□-RD	65	64.5	35.3	20	25.6	12.45	M8	30	200	2,000	180	360	1,500	8,000	19,310	3.8 x 10 ⁻⁴	2.16 x 10 ⁻³	5	2	± 1.0
SJCL-80□□-RD	80	79.5	45.2	24	30.2	14.7	M10	30	245	2,000	320	640	1,500	20,000	37,840	1.0 x 10 ⁻³	4.22 x 10 ⁻³	5	2	± 1.0
SJCL-100□□-RD	104	50.5	56.2	21	39.9	19.9	M12	90	300	1,400	600	1,200	1,500	40,000	100,000	4.6 X 10 ⁻³	4.2 X 10 ⁻²	5	2	±1

※ Torque transmission ability and torsional stiffness are different depending on sleeve type(GR/RD)

Standard inner diameter

Model	Inner diameter (d ₁ , d ₂) [mm]																								
	7	8	9.525	10	11	12	14	15	16	18	19	20	22	24	25	26	28	30	32	35	40	45	50	55	60
SJCBL-30□□-□□	●	●	●	●	●	●	●																		
SJCBL-40□□-□□		●	●	●	●	●	●	●	●	●															
SJCL-55□□-□□						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
SJCL-65□□-□□								●	●	●	●	●	●	●	●	●	●	●	●	●	●				
SJCL-80□□-□□												●	●	●	●	●	●	●	●	●	●	●	●	●	●
SJCL-100□□-□□														●	●	●	●	●	●	●	●	●	●	●	●

※ Non standard inner bore size is also available.

※ Keyway is available.

※ h7 shaft Tolerance is recommended

SJCTL Series


Sungil Jaw Coupling Long Type (Standard)

'SI. CO' mark (trademark application : 40-2012-0061376) indicates Sungil's original product certified with authenticity.
 'SJC' (trademark application : 40-2012-0044881) is the trademark of Sungil's JAW coupling.




Characteristics

- For normal torque transmission
- Perfect concentricity due to powerlock
- Perfect balancing due to manufacturing a hole inside hub
- Split coupling hub is available
- Easy Installation
- Low moment of inertia due to aluminum alloy material
- 2 types of sleeves (GR- Sh 55D, RD-Sh 64D) can be used
- Absorbs vibration
- Zero backlash
- For this type, contact us

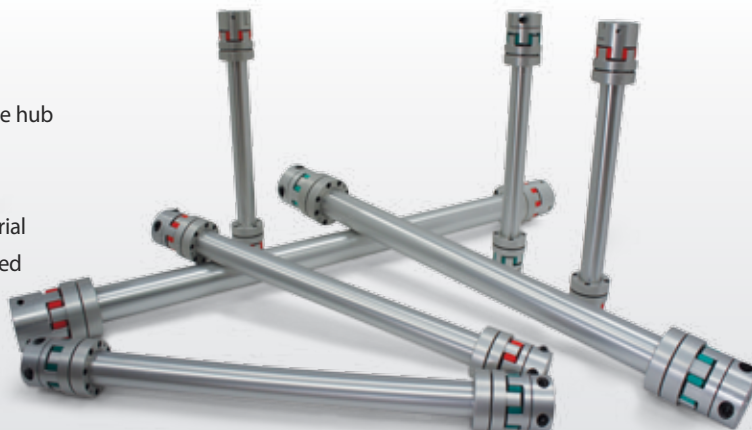


Structure and Material

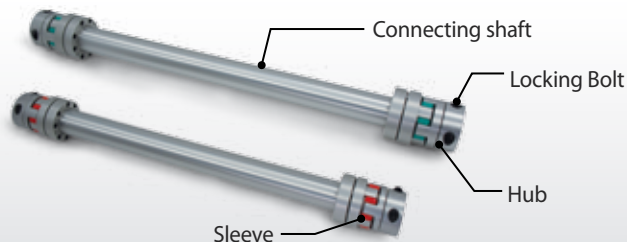

Parts	Raw Material	Surface Treatment
Hub	High stiffness aluminum alloy	Alumite
Outer Ring	GR (Hytrel, Sh 98A)	-
	RD (Hytrel, Sh 64D)	
Middle shaft	High stiffness aluminum alloy	Alumite
Bolt	SCM 435 (SUS Bolt is also available)	-

How to order product


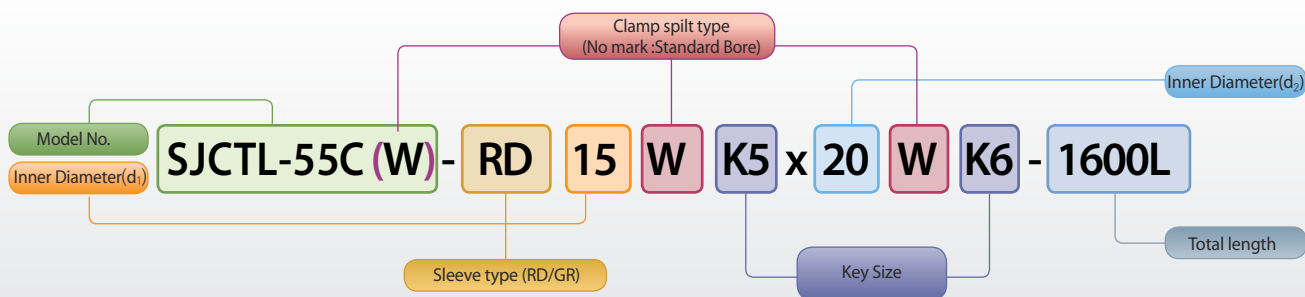


- ※ When you need a longer length than the given maximum length.
- ※ Decide each bore diameter and sleeve type when ordering.
- ※ Clamp split hub is also available. (Please mark 'W' right behind the inner bore you want to separate)


SJCTL Series

Sungil Jaw Coupling Long Type (Standard)

SJCTL-■■■ C

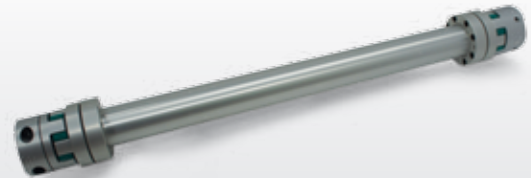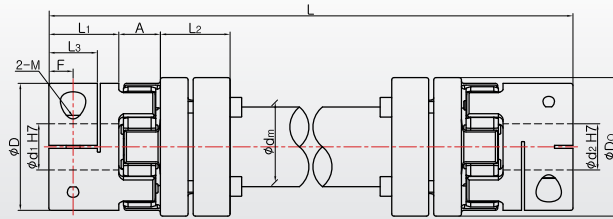

SJCTL-■■■ CW [SPLIT HUB TYPE]

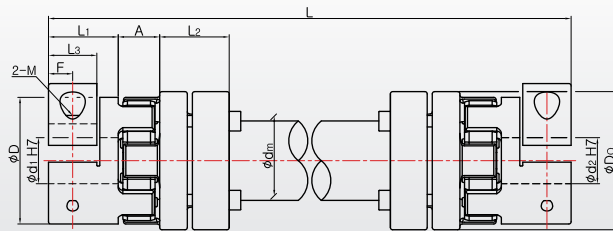

Dimension and performance

Model	Dimension [mm](±0.3)								Clamping Bolt		length (L)		Allowable torque [N · m]	max rotational speed [rpm]	Torsional stiffness [N · m/rad]		Moment of inertia[kg · m ²]		Allowable Misalignment		
	D	Do	dm	L1	L2	L3	A	F	Bolt	Tightening Torque [N · m]	Min	Max			coupling	Pipe per m	coupling [kg · m ²]	Pipe per m [kg · m ²]	Parallel [mm/m]	Angular [deg]	End-play [mm]
SJCTL-55□□-GR	55	60	34.5	30.3	30.2	21	18	10.5	M6	13	220	2,000	128	1,500	2,500	2,540	1.6 × 10 ⁻⁴	2.66 × 10 ⁻⁴	5	2	± 1.0
SJCTL-65□□-GR	65	72	44.5	35.3	35.5	25.6	20	12.45	M8	30	250	2,000	243	1,500	4,000	6,100	3.8 × 10 ⁻⁴	6.39 × 10 ⁻⁴	5	2	± 1.0
SJCTL-80□□-GR	80	90	54.5	45.2	45	30.2	24	14.7	M10	30	290	2,000	398	1,500	10,000	12,000	1.0 × 10 ⁻³	1.26 × 10 ⁻³	5	2	± 1.0
SJCTL-55□□-RD	55	60	34.5	30.3	30.2	21	18	10.5	M6	13	220	2,000	128	1,500	4,000	2,540	1.6 × 10 ⁻⁴	2.66 × 10 ⁻⁴	5	2	± 1.0
SJCTL-65□□-RD	65	72	44.5	35.3	35.5	25.6	20	12.45	M8	30	250	2,000	243	1,500	8,000	6,100	3.8 × 10 ⁻⁴	6.39 × 10 ⁻⁴	5	2	± 1.0
SJCTL-80□□-RD	80	90	54.5	45.2	45	30.2	24	14.7	M10	30	290	2,000	398	1,500	20,000	12,000	1.0 × 10 ⁻³	1.26 × 10 ⁻³	5	2	± 1.0

※Torque transmission ability and torsional stiffness are different depending on sleeve type(GR/RD)

Standard inner diameter

Model	Inner diameter (d ₁ , d ₂) [mm]																							
	7	8	9.525	10	11	12	14	15	16	18	19	20	22	24	25	26	28	30	32	35	40	45	50	55
SJCTL-55□□-□□						●	●	●	●	●	●	●	●	●	●	●	●							
SJCTL-65□□-□□								●	●	●	●	●	●	●	●	●	●	●	●	●				
SJCTL-80□□-□□												●	●	●	●	●	●	●	●	●	●	●		

※ Non standard inner bore size is also available.

※Keyway is available.

※ h7 shaft Tolerance is recommended

SHDL series

Sungil High Torque Flexible Disk Coupling Long Type

'SI. CO' mark (trademark application : 40-2012-0061376) indicates Sungil's original product certified with authenticity.
 'SHD' (trademark : 40-2012-0044879) is the trademark of Sungil's high performance disk coupling.



Characteristics

- Improved durability
- Perfect concentricity
- Split or taper coupling hub is available
- Easy assembly and disassembly
- Low moment of inertia due to aluminum alloy material
- Zero backlash, High torsional stiffness




Structure and Material



Parts	Raw Material	Surface Treatment
Hub	High stiffness aluminum alloy	Alumite
Outer Ring	Stainless steel	-
Middle shaft	High stiffness aluminum alloy	Alumite
Bolt	SCM 435 (SUS bolt is also available)	-

How to order product

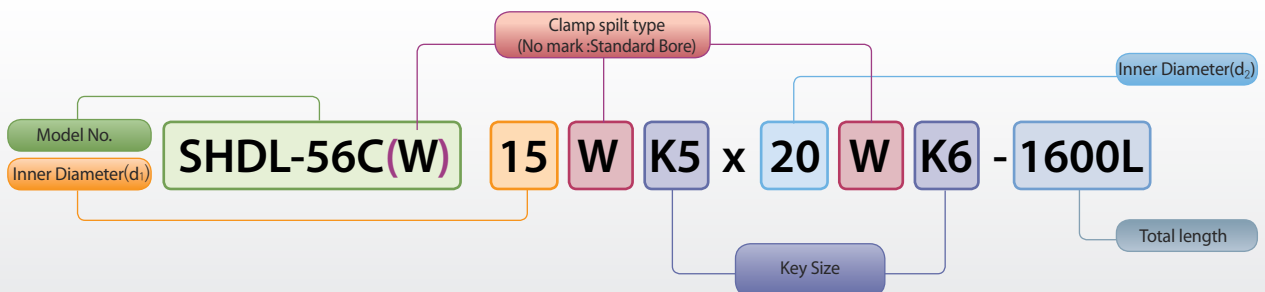

※Contact us for longer length than given max. length(2000mm).

※Decide each shaft diameter type when ordering.

※Split coupling hub is also available

(Ex. SHDL-56CW - 5WK5 x 20K6 - 1600L : one-side split hub)


(Ex. SHDL-56CW - 5WK5 x 20WK6 - 1600L : both-side split hub)

※Please mark 'W' right behind the inner bore you want to separate

SHDL Series Sungil High Torque Flexible Disk Coupling Long Type

Please, download CAD DATA from www.sungilfa.com

SHDL-■■■C

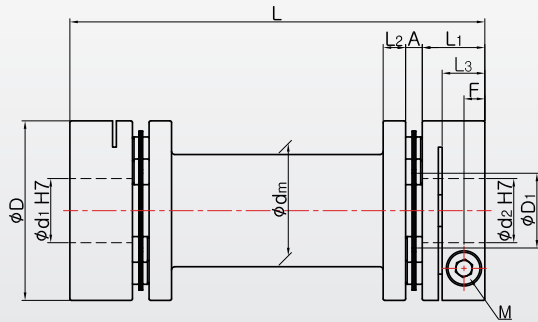

One-piece type



Shaft insertion type

※Contact us for split coupling hub

※There are one-piece middle shaft type and shaft-insertion type with difference in total length(L).

Confirm the max total length on the dimension and performance table below

Dimension and Performance

Model (One-piece type)	Dimension [mm]							Fastening bolt		Length(L)		Rated torque [N · m]	Max Rotational Speed [rpm]	Torsional stiffness [N · m/rad]		Allowable Misalignment		
	D	dm	L ₁	L ₂	L ₃	A	F	bolt	Fastening torque [N · m]	Min	Max			Coupling	Pipe per m	Parallel [mm/m]	Angular [deg]	End-play [mm]
SHDL-56C	56	35	19.5	6	13.3	5.2	6.5	M6	13	80	130	60	1,500	2.0 × 10 ⁴	1.6 × 10 ⁴	0.5	1.4	± 1.2
SHDL-66C	66	41	24.5	8	15.5	7.5	7.5	M6	13	100	150	120	1,500	3.0 × 10 ⁴	2.9 × 10 ⁴	0.5	1.4	± 1.6
SHDL-88C	88	55	30	10	19	9.6	9.9	M8	30	120	170	200	1,500	7.0 × 10 ⁴	6.0 × 10 ⁴	0.5	1.4	± 2.0

Model (Shaft insertion type)	Dimension [mm]							Fastening bolt		Length(L)		Rated torque [N · m]	max Rotational Speed [rpm]	Torsional stiffness [N · m/rad]		Moment of inertia [kg · m ²]		Allowable Misalignment		
	D	dm	L ₁	L ₂	L ₃	A	F	bolt	Fastening torque [N · m]	Min	Max			Coupling	Pipe per m	Coupling	Pipe per m	Parallel [mm/m]	Angular [deg]	End-play [mm]
SHDL-56C	56	44.5	19.5	20	13.3	5.2	6.5	M6	13	130	2,000	60	1,500	2.0 × 10 ⁴	6,000	3.8 × 10 ⁻⁵	1.53 × 10 ⁻⁴	0.5	1.4	± 1.2
SHDL-66C	66	49.5	24.5	25	15.5	7.5	7.5	M6	13	150	2,000	120	1,500	3.0 × 10 ⁴	8,000	9.3 × 10 ⁻⁵	2.72 × 10 ⁻⁴	0.5	1.4	± 1.6
SHDL-88C	88	64.5	30	30	19	9.6	9.9	M8	30	170	2,000	200	1,500	7.0 × 10 ⁴	20,000	3.8 × 10 ⁻⁴	8.50 × 10 ⁻⁴	0.5	1.4	± 2.0

Standard inner diameter

Model	Inner diameter (d ₁ , d ₂) [mm]																									
	10	11	12	14	15	16	18	19	20	22	24	25	26	28	30	32	35	38	40	42	45	50	55	50	55	
SHDL-56C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SHDL-66C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SHDL-88C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

※ Non standard inner bore size is also available.

※ Keyway is available.


※h7 shaft Tolerance is recommended

SHDL series

Sungil High Torque Flexible Disk Coupling Long Type

Please, download CAD DATA from www.sungilfa.com

SHDL-■■■T

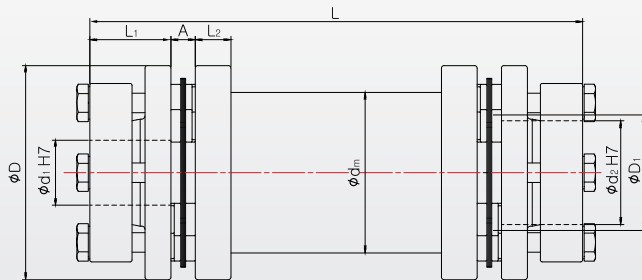

One-piece type



Shaft insertion type

※There are one-piece middle shaft type and shaft-insertional type with difference in total length(L).
Confirm the max total length on the dimension and performance table below.

Dimension and Performance

Model (One-piece type)	Dimension [mm]						Fastening bolt		Length(L)		Rated torque [N · m]	Max Rotational Speed [rpm]	Torsional stiffness [N · m/rad]		Allowable Misalignment		
	D	dm	L ₁	L ₂	L ₃	A	bolt	Fastening torque [N · m]	Min	Max			Coupling	Pipe per m	Parallel [mm/m]	Angular [deg]	End-play [mm]
SHDL-56T	56	35	20	25	6	5.2	M5	8	90	130	60	1,500	2.0×10^4	1.6×10^4	0.5	1.4	± 1.2
SHDL-66T	66	41	25	30.5	8	7.5	M6	16	110	150	120	1,500	3.0×10^4	2.9×10^4	0.5	1.4	± 1.6
SHDL-88T	88	55	30	35.5	10	9.6	M6	16	130	170	200	1,500	7.0×10^4	6.0×10^4	0.5	1.4	± 2.0

Model (Shaft insertion type)	Dimension [mm]						Fastening bolt		Length(L)		Rated torque [N · m]	max Rotational Speed [rpm]	Torsional stiffness [N · m/rad]		Moment of inertia [kg · m ²]		Allowable Misalignment		
	D	dm	L ₁	L ₂	L ₃	A	bolt	Fastening torque [N · m]	Min	Max			Coupling	Pipe per m	Coupling	Pipe per m	Parallel [mm/m]	Angular [deg]	End-play [mm]
SHDL-56T	56	44.5	20	25	20	5.2	M5	8	130	2,000	60	1,500	2.0×10^4	6,000	3.6×10^{-5}	1.53×10^{-4}	0.5	1.4	± 1.2
SHDL-66T	66	49.5	25	30.5	25	7.5	M6	16	150	2,000	120	1,500	3.0×10^4	8,000	8.6×10^{-5}	2.72×10^{-4}	0.5	1.4	± 1.6
SHDL-88T	88	64.5	30	35.5	30	9.6	M6	16	170	2,000	200	1,500	7.0×10^4	20,000	3.2×10^{-4}	8.50×10^{-4}	0.5	1.4	± 2.0

Standard inner diameter

Model	Inner diameter (d_1, d_2) [mm]																							
	10	11	12	14	15	16	18	19	20	22	24	25	26	28	30	32	35	38	40	42	45	50	55	
SHDL-56T	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-
SHDL-66T	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-	-	-
SHDL-88T	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-

※h7 shaft Tolerance is recommended

Support Units



Sungil Support Units

EK, EF Type Support Units



BK, BF Type Support Units



AK, AF Type Support Units



FK, FF Type Support Units



Characteristics of SI Support Units

The Support Units of SI Machinery are standardized in order to firmly support and fasten a ball screw for transmitting linear motion very precisely.



Features

Simplicity of Design and Assembly

The design is very effective for use due to its standardization. Rigid angular contact bearings in a fixed part are combined with an optimized pre-load, so it can improve precision of liner motion of a ball screw easily without additional assembly or operation. Moreover, the standardized product ensures superior compatibility.

High Precision


Angular contact ball bearings in the fixed parts are precisely assembled in face-to-face combination. Because it is designed in a structure to absorb the parallel error between shaft and guide, it has minimized the effect of assembly error and can maintain precise concentricity of the shaft.

Dust-Proof Effect

The support unit is framed with oil seal to prevent the influx of fine dusts or foreign substances and thus enhances operation precision. Furthermore, it allows longtime use as grease leakage is prevented by minimizing the tolerance between the oil seal and the rotation shaft.

Structure


In the fixed part of support unit, highly rigid angular contact ball bearings are assembled in face-to-face combination, which is appropriate to the dynamic characteristic of the rotational shaft or screw. In addition, it can achieve highly accurate rotational or linear motion due to precisely controlled pre-load in assembly process. The angular contact bearings are filled with the appropriate volume of high quality grease, and Oil seal is framed in the fixed part to prevent fine dusts and the grease from leaking. Deep groove ball bearing is used for the simple support part of support unit.

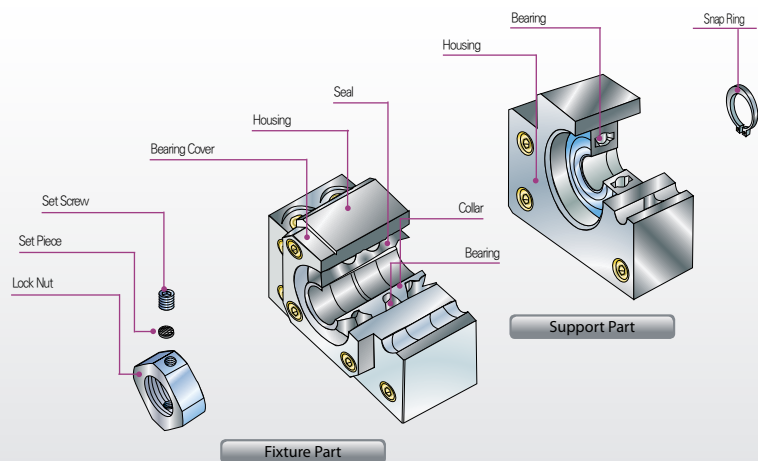

Shape and Classification

There are 2 different types of support units for installation and condition of use.

One is the square type that fixes the unit on base surface and another is the round type to fix in a hole. Depending on the position of power transmission shaft, the fixed-side(motor) support unit and support-side support unit can be selected.

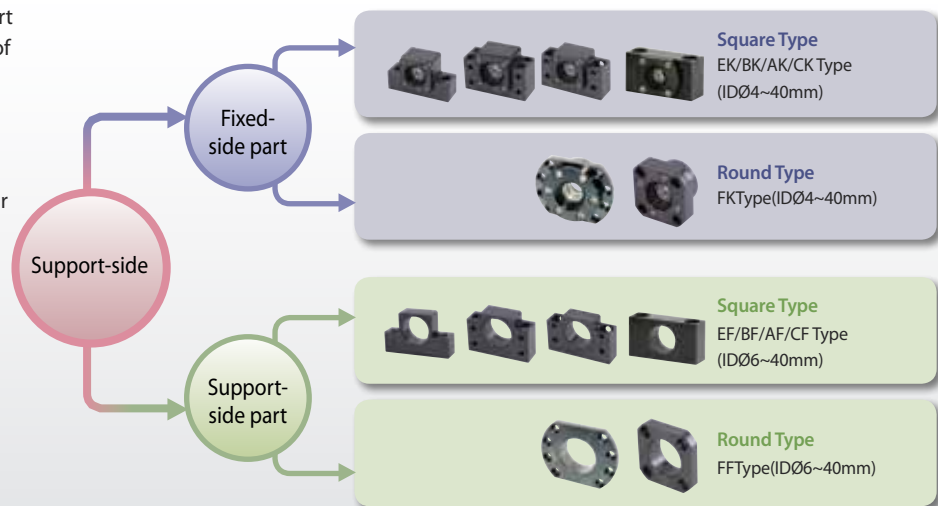

Characteristics of SI Support Units

How to Order

The Fixed Side

BK10

Model No. of the Fixed-side
(EK, BK, AK, FK)

P5 Grade: High Precision

C8 Grade: Intermediate Pre-load

P0-C7 Grade: Light Pre-load

- P5 (High Precision type): assembled with P5 bearing
- C8 (Intermediate Pre-load): assembled with preload type bearing
- P0-C7 (Light Pre-load): No clearance due to use of P0 bearing and assembled with C7 pre-load type bearing (Registration of the utility model: 20-0271941)



The Supported Side

BF10

Model No. of the Supported-side(EF, BF, AF, FF)

Please, note that the type names and numbers for the supported-side support unit (EF, BF, AF, FF (No. 8, 10, 12)) are not the same as the inner diameter of bearing used in the corresponding product. (Please, refer to page 71, 73, 75, 77)
TYPE name and number ≠ Inner diameter of bearing (EF, BF, AF, FF8=ø6, EF, BF, AF, FF12=ø10)

Support Unit Characteristic Chart

Model No.	Bearing Type			Axial Direction	
	P5	C8	P0-C7	Basic dynamic rated load (Kgf)	Static permissible load (Kgf)
EK4 / FK4	AC4-14-DF 	-	634ZZ	-	-
EK5 / FK5	AC5-14-DF 	-	625ZZ	-	-
EK6 / FK6	706ATYNDFMP5	-	606ZZ	250	110
BK6	-	-	EN6	-	-
EK8 / FK8 / CK8	708ATYNDFMP5	-	EN8	410	150
BK8	-	-	EN8	-	-
AK8	708ATYNDFMP5	-	-	410	150
EK10 / BK10 / FK10 / AK10 / CK10	7000ATYNDFMP5	7000AWDFM	7000AW	650	280
EK12 / BK12 / FK12 / AK12 / CK12	7001ATYNDFMP5	7001AWDFM	7001AW	700	310
EK15 / BK15 / FK15 / AK15	7002ATYNDFMP5	7002AWDFM	7002AW	750	350
BK17, FK17	7203ATYNDFMP5	7203AWDFM	7203AW	1300	590
EK20 / FK20 / AK20	7204ATYNDFMP5	7204AWDFM	7204AW	1750	840
BK20	7004ATYNDFMP5	7004AWDFM	7004AW	1610	840
EK25 / BK25 / FK25	7205ATYNDFMP5	7205AWDFM	7205AW	1960	1010
BK30 / FK30	7206ATYNDFMP5	7206AWDFM	7206AW	2730	1340
BK35 / FK35	7207ATYNDFMP5	7207AWDFM	7207AW	3560	1840
BK40 / FK40	7208ATYNDFMP5	7208AWDFM	7208AW	4250	2290

Bearing Combination


There are DB combination and DF combination in combination methods of angular bearing. SI Support Unit uses DF combination.

DB Combination

- The distance between effective load centers is long. So the stiffness is big when there is moment load. It gets flaking damage easily because of increase in internal load when there is misalignment.

DF Combination


- The distance between effective load centers is short. So the stiffness is low when there is moment load. Its absorbability of assembly error is superior so it is used normally for bearing combination.

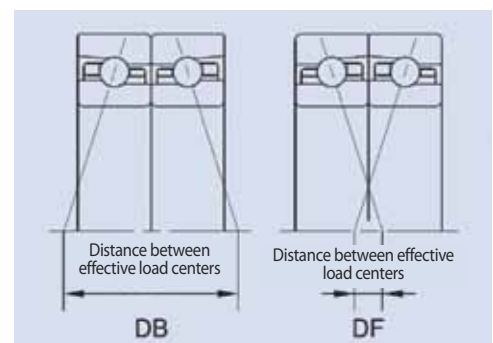

Mounting Procedure


1. Installing the Support Unit

- 1) Connect the fixed-side part with ball screw shaft
 - Do not disassemble the support unit as its preload has already been adjusted
 - Take care not to let the oil seal lip turn outward when ball screw is inserted into the unit.
- 2) After inserting the ball screw into the unit, put the collar and secure the locknut by fastening the set piece and setscrew
 - Adhesive can be used to prevent the locknut from being loosened.
- 3) Mount the nut bracket on ball screw.
- 4) After connecting the ball bearing for supportive part to the ball screw shaft, fix the snap ring and mount the bearing onto the housing.

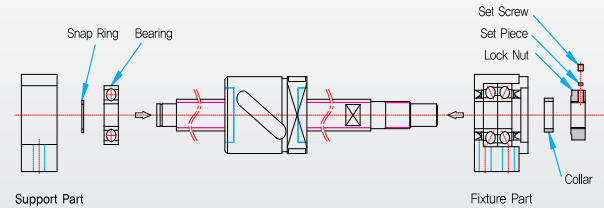


2. Installation onto Table and Base

- 1) Fasten a table with the nut bracket of ball screw.
- 2) Pre-assemble the fixed-side support unit with base as designed
 - If using the fixed side Support Unit as the reference point, provide a clearance between the ball screw nut and the table or inside the bracket when making adjustment.
 - If using the table as the reference point, make the adjustment either by using the shim (for a square type Support Unit), or providing the clearance between the outer surface of the nut and the inner surface of the mounting section (for a round type Support Unit)
- 3) Assemble the housing of support-side support unit with ball screw and then pre-assemble the unit with base as designed.

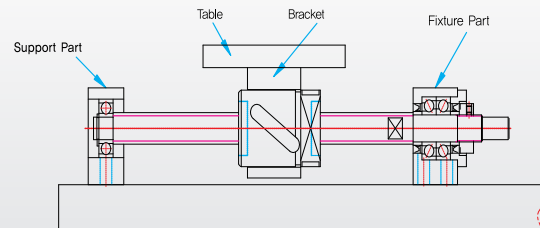


3. Checking the accuracy and Fully Mounting the Support Unit

- 1) Move the table assembled to the ball screw toward the center of the shaft in order to make it concentric. Make back-and-forth motion so that its linear movement can be smooth.
- 2) Measure the axial clearance of the shaft and the rou-out at the end of the shaft of the ball screw with a dial gauge. Fully fasten in the order of nut bracket and table, the fixed-side unit, and then the support-side unit.

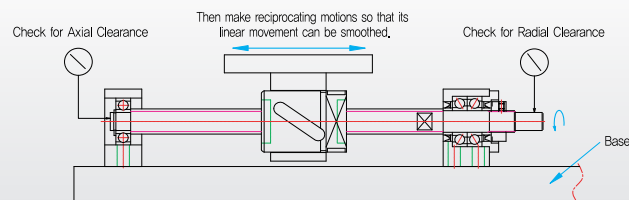

4. Connection with Motor

- 1) Precisely connect the bracket installed on the motor to the base by matching it to the shaft center of the ball screw.
- 2) Connect the motor and the ball screw by using a SUNGIL coupling
 - Careful attention is necessary during assembly as the assembly condition of the motor bracket and the coupling affects the positioning of table.
- 3) Check the precision of the shaft center by conducting enough test operation while driving the motor at slow speed.

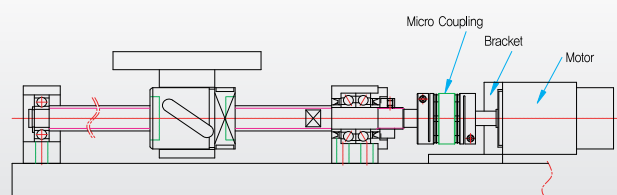


Characteristics of SI Support Units

Please, download CAD DATA from www.sungilfa.com

Recommendable Shape of the Shaft End(Fixed-Side)

Application of Support Unit EK, BK, AK, FK Type

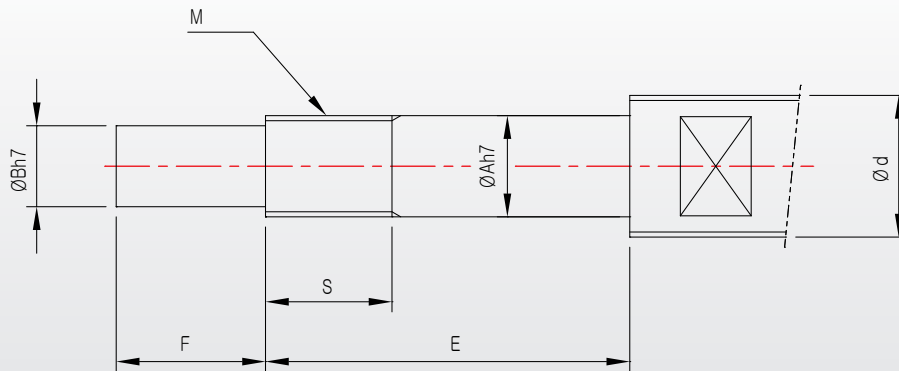

Unit : mm

Model No.															Outer Diameter of Ball Screw	Inner Diameter of Bearing	Dimension	Metric Screw					
AK	Dimension			BK	Dimension			CK	Dimension			EK	Dimension			FK	Dimension			d	A	B	M
	E	F	S		E	F	S		E	F	S		E	F	S		E	F	S				
-	-	-	-	-	-	-	-	-	-	-	-	4	23	5	8	4	23	5	8	6	4	3	M4×0.5
-	-	-	-	-	-	-	-	-	-	-	-	5	25	6	8	5	25	6	8	8	5	4	M5×0.5
-	-	-	-	6	30	8	8	-	-	-	-	6	30	8	8	6	30	8	8	8	6	4	M6×0.75
-	-	-	-	8	35	9	10	8	35	9	10	8	35	9	10	8	35	9	10	12	8	6	M8×1/0.75
10	36	15	16	10	39	15	16	10	38	15	11	10	36	15	11	10	36	15	11	14/15	10	8	M10×1/0.75
12	36	15	14	12	39	15	14	12	38	15	11	12	36	15	11	12	36	15	11	16/18	12	10	M12×1
15	49	20	12	15	40	20	12	15	50	20	23	15	49	20	13	15	49	20	13	20/25	15	12	M15×1
-	-	-	-	17	53	23	17	-	-	-	-	-	57	27	14	17	57	27	14	25	17	15	M17×1
20	64	25	16	20	53	25	16	-	-	-	-	20	64	25	17	20	64	25	17	28/30/32	20	17	M20×1
-	-	-	-	25	65	30	19	-	-	-	-	25	76	30	20	25	76	30	20	36	25	20	M25×1.5
-	-	-	-	30	72	38	25	-	-	-	-	-	38	25	30	72	38	25	40	30	25	25	M30×1.5
-	-	-	-	35	83	45	28	-	-	-	-	-	45	28	35	83	45	28	45	35	30	30	M35×1.5
-	-	-	-	40	98	50	35	-	-	-	-	-	50	35	40	98	50	35	50/55	40	35	35	M40×1.5


Characteristics of SI Support Units

Please, download CAD DATA from www.sungilfa.com




Recommendable Shape of the Shaft End(Support-side)

Application of Support Unit EF, BF, AF, FF Type

FF Type



AF Type / EF Type / BF Type




Unit : mm

Model No.				Outer Diameter of Ball Screw	Inner Diameter of Bearing		Snap Ring Dimension		
AF	FF	EF	BF	d	A	E	B	F	G
-	FF6	EF6	BF6	8	6	9	5.6	6.9	0.9
AF8	FF8	EF8	BF8	12	6	9	5.6	6.9	0.9
AF10	FF10	EF10	BF10	14	8	10	7.6	7.9	0.9
AF10	FF10	EF10	BF10	15	8	10	7.6	7.9	0.9
AF12	FF12	EF12	BF12	16	10	11	9.6	9.15	1.15
AF12	FF12	EF12	BF12	18	10	11	9.6	9.15	1.15
AF15	FF15	EF15	BF15	20	15	13	14.3	10.15	1.15
AF15	FF15	EF15	BF15	25	15	13	14.3	10.15	1.15
-	FF17	-	BF17	25	17	16	16.2	13.15	1.15
AF20	FF20	EF20	BF20	28	20	19(16)	19	15.35(13.35)	1.35
-	FF20	EF20	BF20	30	20	19(16)	19	15.35(13.35)	1.35
-	FF20	EF20	BF20	32	20	19(16)	19	15.35(13.35)	1.35
-	FF25	-	BF25	36	25	20	23.9	16.35	1.35
-	FF30	-	BF30	40	30	21	28.6	17.75	1.75
-	-	-	BF35	45	35	22	33	18.75	1.75
-	-	-	BF40	50	40	23	38	19.95	1.95
-	-	-	BF40	55	40	23	38	19.95	1.95

※ The numbers in parenthesis indicate dimensions of BF 20.


EK Type Support Unit

Square Type for Fixture




Please, download CAD DATA from www.sungilfa.com



EK 6~8

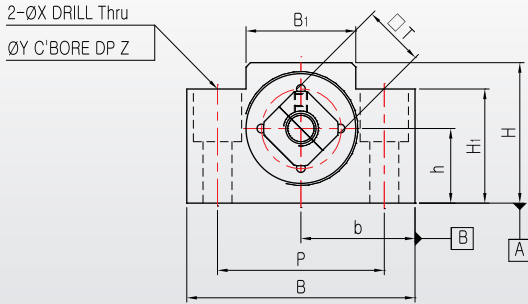

EK 4, 5

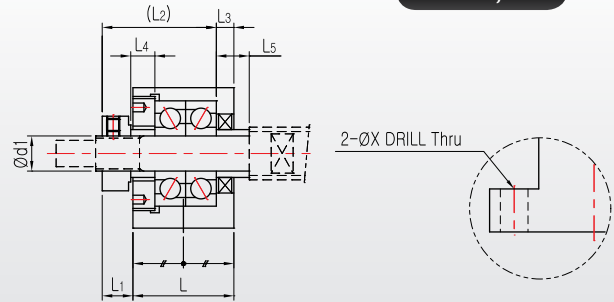


EK 10~20

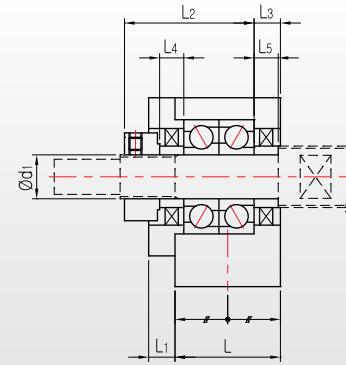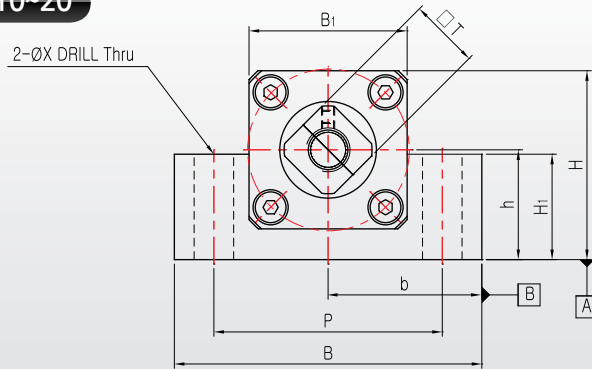

Note

1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.
2. Do not disassemble the support unit since the preload of the bearing has already been adjusted.
3. Appropriate amount of grease is filled in the bearing of fixed-side support unit.
4. Radial ball bearing is in EK-4 and EK-5 and it is suitable for use on portions it where axial load is small.
5. Please refer to page 66 about bearing type and characteristic according to Support Unit grade
6. Please refer to page 86 for fastening torque of the lock nut.

EK 25 Reference

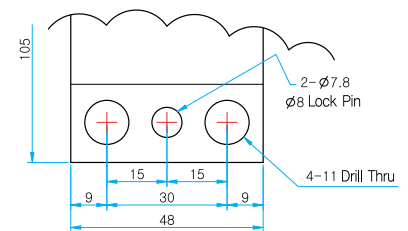


Unit : mm

Model No.	d ₁	L	L ₁	L ₂	L ₃	B	H	b±0.02	h±0.02	B ₁	H ₁	P	X	Y	Z	Collar Size		□T	Mass (g)
																L ₄	L ₅		
EK4 P5 / P0-C7	4	15	5.5	17.5/18.5	3/2	34	19	17	10	18	7	26	4.5	-	-	4.5/3.5	4.5/3.5	10	50
EK5 P5 / P0-C7	5	16.5	5.5/6.5	19.5	3.5	36	21	18	11	20	8	28	4.5	-	-	5.5/4.5	5.5/4.5	11	68
EK6	6	20	5.5	22	3.5	42	25	21	13	18	20	30	5.5	9.5	11	5	7	12	120
EK8	8	23	7	26	4	52	32	26	17	25	26	38	6.6	11	12	5.5	7.5	14	230
EK10	10	24	6	29.5	6	70	43	35	25	36	24	52	9	-	-	5.5	5.5	16	430
EK12	12	24	6	29.5	6	70	43	35	25	36	24	52	9	-	-	5.5	5.5	19	420
EK15	15	25	6	36	5	80	50	40	30	41	25	60	11	-	-	10	10	22	530
EK20	20	42	10	50	10	95	58	47.5	30	56	25	75	11	-	-	11	11	30	1310
EK25	25	48	13	59	14	105	68	52.5	35	66	25	85	(Refer to Drawing)			14	14	35	1950

EF Type Support Unit


Square Type for Support

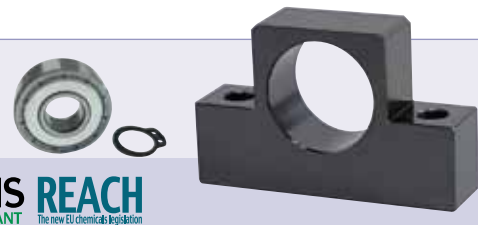


ROHS COMPLIANT REACH The new EU chemicals legislation

Please, download CAD DATA from www.sungilfa.com

EF 6 ~ 8

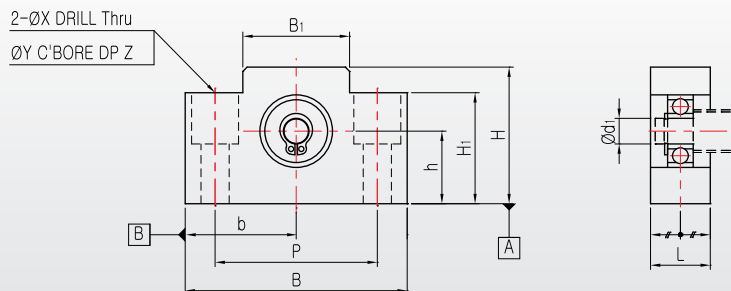

EF 10 ~ 25

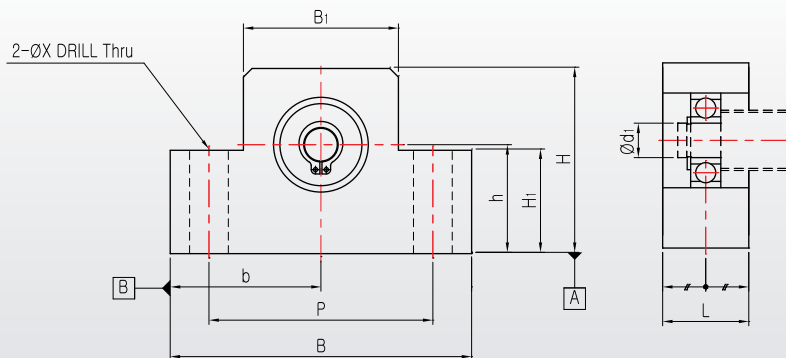

Note

1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.




Unit : mm

Model No.	d ₁	L	B	H	b±0.02	h±0.02	B ₁	H ₁	P	X	Y	Z	Mass (g)	Bearing	Snap Ring
EF6	6	12	42	25	21	13	18	20	30	5.5	9.5	11	60	606ZZ	C6
EF8	6	14	52	32	26	17	25	26	38	6.6	11	12	120	606ZZ	C6
EF10	8	20	70	43	35	25	36	24	52	9	-	-	300	608ZZ	C8
EF12	10	20	70	43	35	25	36	24	52	9	-	-	280	6000ZZ	C10
EF15	15	20	80	50	40	30	41	25	60	9	-	-	320	6002ZZ	C15
EF20	20	26	95	58	47.5	30	56	25	75	11	-	-	570	6204ZZ	C20
EF25	25	30	105	68	52.5	35	66	25	85	11	-	-	880	6205ZZ	C25

BK Type Support Unit

Square Type for Fixture


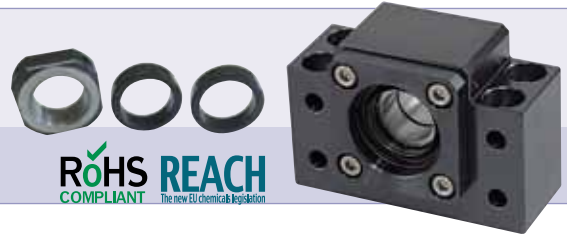


ROHS COMPLIANT REACH The new EU chemicals legislation

Please, download CAD DATA from www.sungilfa.com



BK 6 ~ 8

2-ØX DRILL Thru
ØY C'BORE DP Z

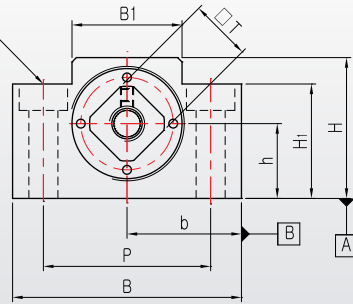

BK10~40

4-ØX DRILL Thru
ØY C'BORE DP Z
4-Ød2 DRILL Thru

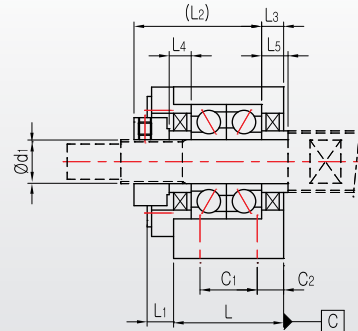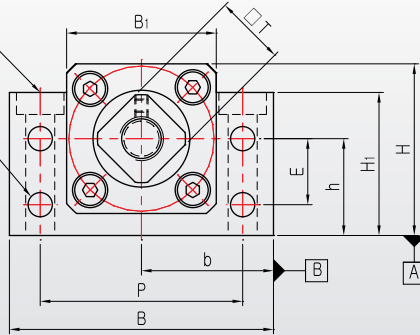

Note


1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.
2. Do not disassemble the support unit since the preload of the bearing has already been adjusted.
3. Appropriate amount of grease is filled in the bearing of fixed-side support unit.
4. Please refer to page 66 about bearing type and characteristic according to Support Unit grade
5. Please refer to page 86 for fastening torque of the lock nut.

Unit : mm

Model No.	d ₁	L	L ₁	L ₂	L ₃	B	H	b±0.02	h±0.02	B ₁	H ₁	E	P	C ₁	C ₂	d ₂	X	Y	Z	Collar Size		□T	Mass (g)
																				L ₄	L ₅		
BK6	6	23	5	24	4	52	32	26	17	25	26	-	38	-	11.5	-	6.6	11	6	5	5	12	230
BK8	8	23	7	26	4	52	32	26	17	25	26	-	38	-	11.5	-	6.6	11	6	5.5	7.5	14	230
BK10	10	25	5	29	5	60	39	30	22	34	32.5	15	46	13	6	5.5	6.6	10.8	5	5	5	16	360
BK12	12	25	5	29	5	60	43	30	25	34	35	18	46	13	6	5.5	6.6	10.8	6	5	5	19	390
BK15	15	27	6	32	6	70	48	35	28	40	38	18	54	15	6	5.5	6.6	10.8	6	6	6	22	530
BK17	17	35	9	44	7	86	64	43	39	50	55	28	68	19	8	6.6	9	14	8.5	7	7	24	1270
BK20	20	35	8	43	8	88	60	44	34	52	50	22	70	19	8	6.6	9	14	8.5	8	8	30	1650
BK25	25	42	12	54	9	106	80	53	48	64	70	33	85	22	10	9	11	17.5	11	9	9	35	2310
BK30	30	45	14	61	9	128	89	64	51	76	78	33	102	23	11	11	14	20	13	9	9	40	3330
BK35	35	50	14	67	12	140	96	70	52	88	79	35	114	26	12	11	14	20	13	12	12	50	4380
BK40	40	61	18	76	15	160	110	80	60	100	90	37	130	33	14	14	18	26	17.5	15	15	50	6670

BF Type Support Unit


Square Type for Support




RoHS COMPLIANT **REACH**
The new EU chemicals legislation

Please, download CAD DATA from www.sungilfa.com

BF6~8

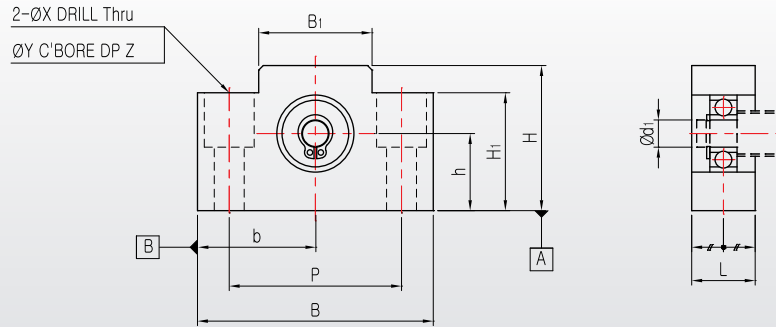

BF10~40

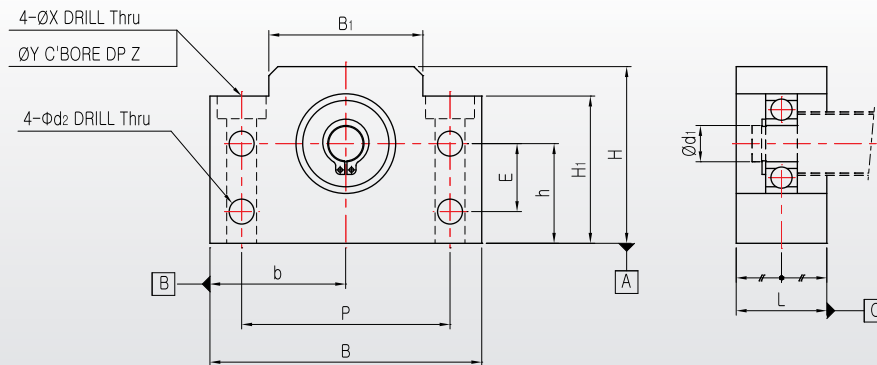

Note

1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.



Unit : mm

Model No.	d ₁	L	B	H	b±0.02	h±0.02	B ₁	H _i	E	P	d ₂	X	Y	Z	Mess(g)	Bearing	Snap Ring
BF6/8	6	14	52	32	26	17	25	26	-	38	-	6.6	11	12	120	606ZZ	C6
BF10	8	20	60	39	30	22	34	32.5	15	46	5.5	6.6	10.8	5	260	608ZZ	C8
BF12	10	20	60	43	30	25	34	35	18	46	5.5	6.6	10.8	6.5	270	6000ZZ	C10
BF15	15	20	70	48	35	28	40	38	18	54	5.5	6.6	10.8	6.5	310	6002ZZ	C15
BF17	17	23	86	64	43	39	50	55	28	68	6.6	9	14	8.5	680	6203ZZ	C17
BF20	20	26	88	60	44	34	52	50	22	70	6.6	9	14	8.5	710	6004ZZ	C20
BF25	25	30	106	80	53	48	64	70	33	85	9	11	17.5	11	1340	6205ZZ	C25
BF30	30	32	128	89	64	51	76	78	33	102	11	14	20	13	1880	6206ZZ	C30
BF35	35	32	140	96	70	52	88	79	35	114	11	14	20	13	2080	6207ZZ	C35
BF40	40	37	160	110	80	60	100	90	37	130	14	18	26	17.5	3100	6208ZZ	C40

AK Type Support Unit


Square Type for Fixture



ROHS COMPLIANT REACH The new EU chemical legislation

Please, download CAD DATA from www.sungilfa.com

AK 8 ~ 20

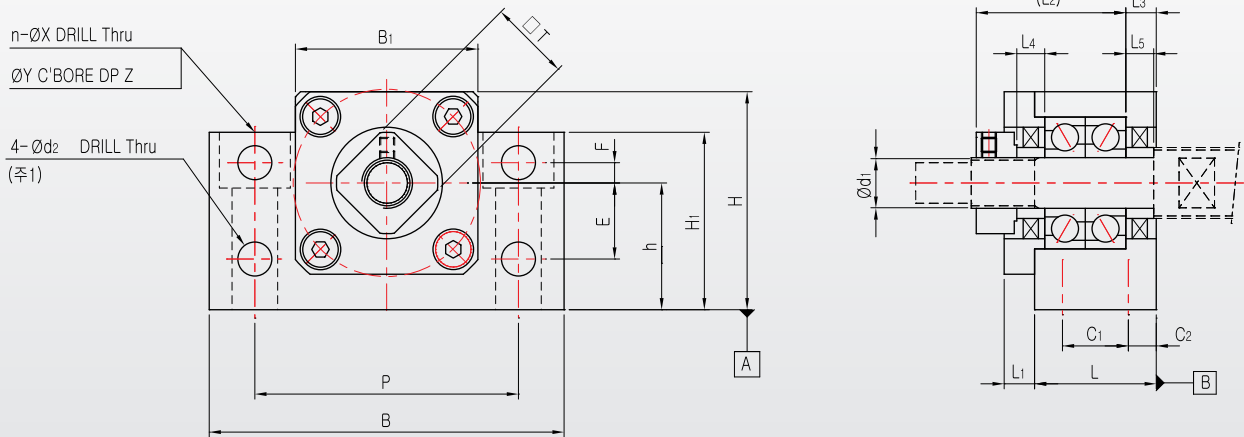

Remark (1) : AK 20 has no drilled hole at the annotated position

Note

1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.
2. Do not disassemble the support unit since the preload of the bearing has already been adjusted.
3. Appropriate amount of grease is filled in the bearing of fixed-side support unit.
4. Please refer to page 66 about bearing type and characteristic according to Support Unit grade
5. Please refer to page 86 for fastening torque of the lock nut.

Unit : mm

Model No.	d_1	L	L_1	L_2	L_3	B	H	$h \pm 0.02$	B_1	H_1	E	F	P	C_1	C_2	d_2	n	X	Y	Z	Collar Size		$\square T$	Mass (g)
																					L_4	L_5		
AK8	8	20	3	24	4	52	32	17	25	26	10	4	38	-	10	5.5	2	6.6	11	12	4	4	14	190
AK10	10	24	6	29.5	6	70	43	25	36	35	15	4	52	-	12	6.6	2	9	14	11	5.5	5.5	16	450
AK12	12	24	6	29.5	6	70	43	25	36	35	15	4	52	-	12	6.6	2	9	14	11	5.5	5.5	19	440
AK15	15	25	6	36	5	80	50	30	41	40	15	4	60	-	12.5	6.6	2	11	17	15	10	10	22	570
AK20	20	42	10	50	10	95	58	30	56	45	-	-	75	22	10	-	4	11	17	15	11	11	30	1400


AF Type Support Unit

Square Type for Support



Please, download CAD DATA from www.sungilfa.com

AF 8 ~ 20

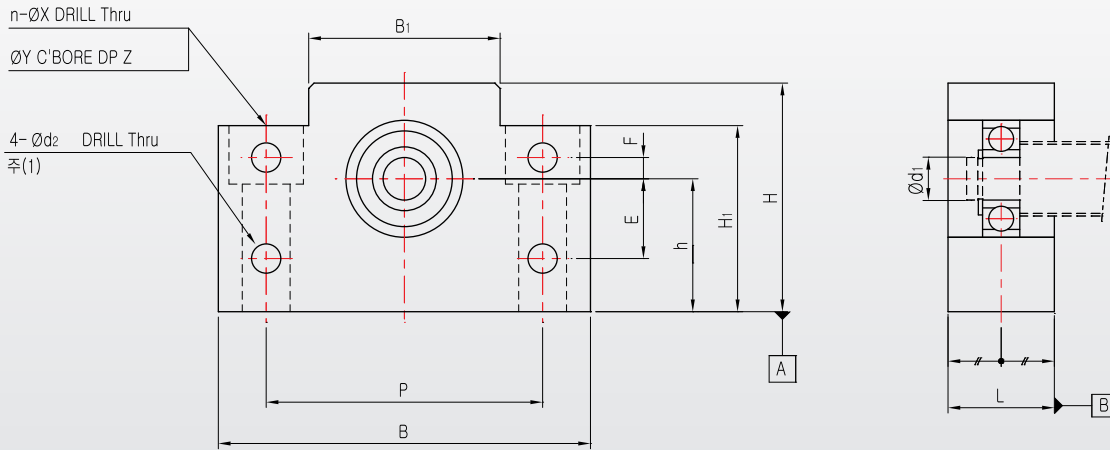

Remark (1) : AK 20 has no drilled hole at the annotated position

Note

1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.



Unit : mm

Model No.	d ₁	L	B	H	h±0.02	B ₁	H ₁	E	F	P	d ₂	X	Y	Z	Mass (g)	Bearing	Snap Ring
AF8	6	15	52	32	17	25	26	10	4	38	5.5	6.6	11	12	130	606ZZ	C6
AF10	8	20	70	43	25	36	35	15	4	52	6.6	9	14	11	320	608ZZ	C8
AF12	10	20	70	43	25	36	35	15	4	52	6.6	9	14	11	300	6000ZZ	C10
AF15	15	20	80	50	30	41	40	15	4	60	6.6	9	14	11	370	6002ZZ	C15
AF20	20	26	95	58	30	56	45	-	-	75	-	11	17	15	660	6204ZZ	C20

FK Type Support Unit



Round Type for Fixture



RoHS COMPLIANT **REACH**
The new EU chemicals legislation



Please, download CAD DATA from www.sungilfa.com

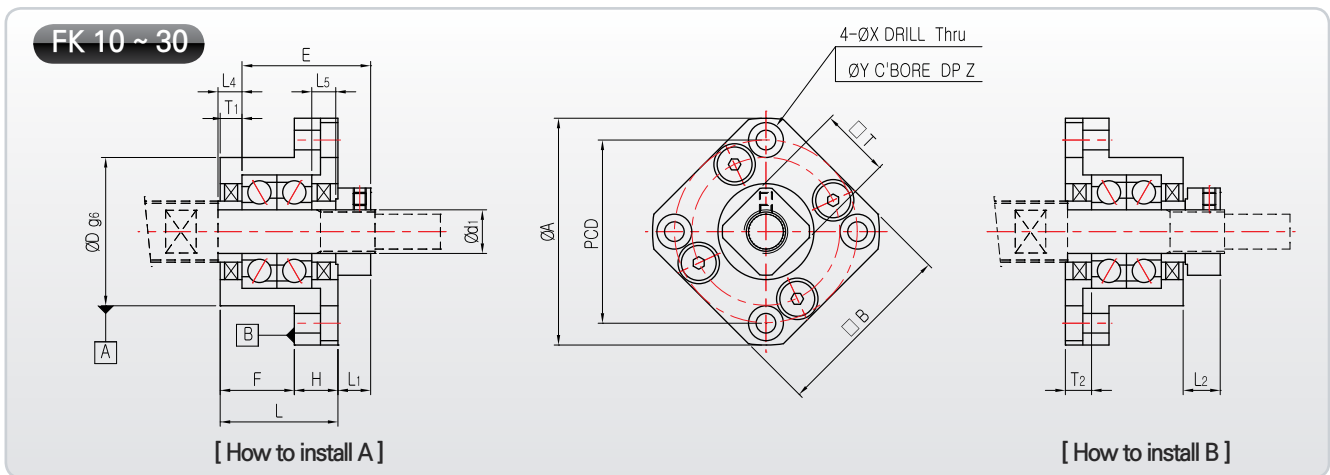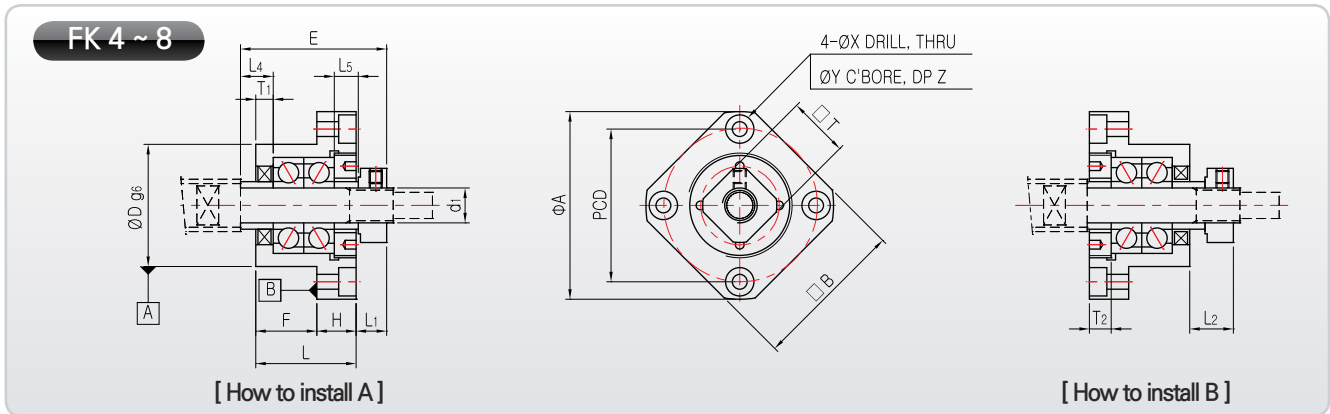

※ For the FK 30, when you install like 'B way', collar sizes must be changed, so please contact us.

Note


1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.
2. Do not disassemble the support unit since the preload of the bearing has already been adjusted.
3. Appropriate amount of grease is filled in the bearing of fixed-side support unit.
4. Please refer to page 66 about bearing type and characteristic according to Support Unit grade
5. Please refer to page 86 for fastening torque of the lock nut.

Unit : mm

Model No.	d ₁	L	H	F	E	D	A	PCD	□B	How to install A		How to install B		X	Y	Z	Collar Size		□T	Mass (g)
										L ₁	T ₁	L ₂	T ₂				L ₄	L ₅		
FK4 P5 / P0-C7	4	15	6	9	22	18	32	24	25	5.5	3/2	5.5/6.5	4/3	3.4	6	4	4.5/3.5	4.5/3.5	10	40
FK5 P5 / P0-C7	5	16.5	6	10.5	24	20	34	26	26	5.5/6.5	3.5	6	5/3	3.4	6/6.5	4	5.5/4.5	5.5/4.5	11	50
FK6	6	20	7	13	29	22	36	28	28	5.5	3.5	8.5	4.5	3.4	6.5	4	7	5	12	65
FK8	8	23	9	14	33.5	28	43	35	35	7	4	10	5	3.4	6.5	4	7.5	5.5	14	125
FK10	10	27	10	17	29.5	34	52	42	42	7.5	5	8.5	6	4.5	8	4	5.5	5.5	16	200
FK12	12	27	10	17	29.5	36	54	44	44	7.5	5	8.5	6	4.5	8	4	5.5	5.5	19	225
FK15	15	32	15	17	36	40	63	50	52	10	6	12	8	5.5	9.5	6	10	10	22	340
FK17	17	45	22	23	46	50	77	62	61	10	9	13	12	6.6	11	10	9	9	24	770
FK20	20	52	22	30	50	57	85	70	68	8	10	12	14	6.6	11	10	11	11	30	1065
FK25	25	57	27	30	60	63	98	80	79	13	10	20	17	9	15	13	15	15	35	1465
FK30	30	62	30	32	61	75	117	95	93	11	12	17	18	11	17.5	15	9	9	40	2300


FF Type Support Unit

Round Type for Support



ROHS COMPLIANT REACH The new EU chemicals legislation

Please, download CAD DATA from www.sungilfa.com

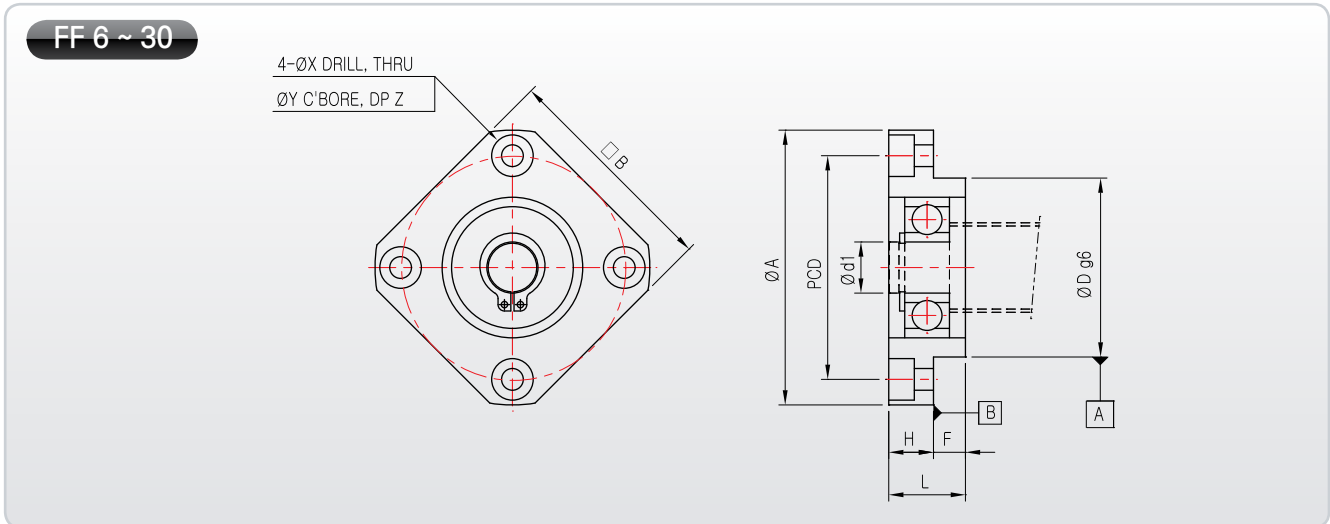

Note

1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.



Unit : mm

Model No.	d_i	L	H	F	D	A	PCD	B	X	Y	Z	Mass (g)	Bearing	Snap Ring
FF6-8	6	10	6	4	22	36	28	28	3.4	6.5	3	30	606ZZ	C6
FF10	8	12	7	5	28	43	35	35	3.4	6.5	4	60	608ZZ	C8
FF12	10	15	7	8	34	52	42	42	4.5	8	4	100	6000ZZ	C10
FF15	15	17	9	8	40	63	50	52	5.5	9.5	5.5	140	6002ZZ	C15
FF17	17	20	11	9	50	77	62	61	6.5	11	6.5	290	6203ZZ	C17
FF20	20	20	11	9	57	85	70	68	6.6	11	6.5	380	6204ZZ	C20
FF25	25	24	14	10	63	98	80	79	9	14	8.5	590	6205ZZ	C25
FF30	30	27	18	9	75	117	95	93	11	17.5	11	930	6206ZZ	C30

FK/FF Type Support Unit


Round Type for Fixture
Round Type for Support

ROHS COMPLIANT REACH
The new EU Chemicals Regulation



Please, download CAD DATA from www.sungilfa.com




FK 25D ~ 30D

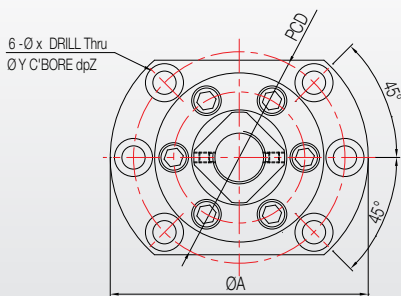



FK35 ~ 40

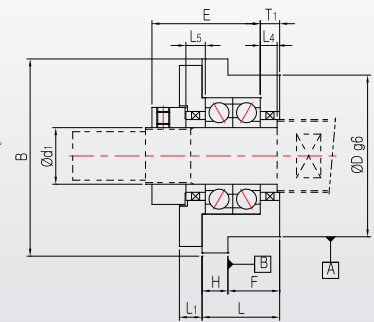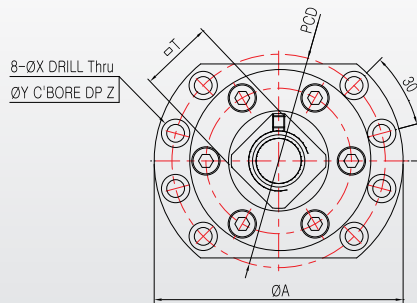

FF 25D ~ 30D

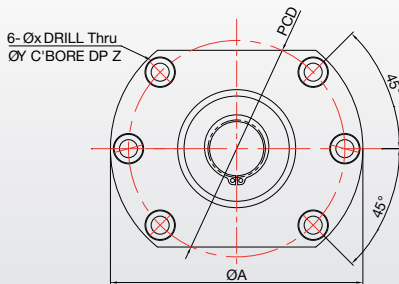

FF 35 ~ 40

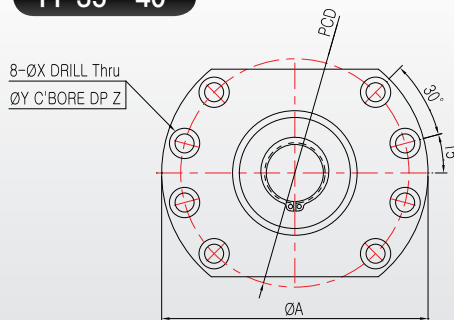

Note

1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.
2. Do not disassemble the support unit since the preload of the bearing has already been adjusted.
3. Appropriate amount of grease is filled in the bearing of fixed-side support unit.
4. Please refer to page 64 about bearing type and characteristic according to Support Unit grade
5. Please refer to page 82 for fastening torque of the lock nut.

Unit : mm

Model No.	d ₁	L	H	F	E	D	A	PCD	B	L ₁	T ₁	X	Y	Z	Collar Size		□T	Mass (g)
															L ₄	L ₅		
FK25D	25	42	15	27	54	80	122	100	92	12	10	11	17.5	11	10	10	35	2500
FK30D	30	45	15	30	70	90	138	116	106	14	11	11	17.5	11	11	11	40	3500
FK35	35	48	16	32	67	100	154	132	120	14	12	11	17.5	11	12	12	50	4080
FK40	40	61	18	43	76	120	176	150	128	18	16	14	20	13	15	15	50	6750

Unit : mm

Model No.	d ₁	L	H	F	D	A	PCD	B	X	Y	Z	Bearing	Snap Ring	Mass (g)
FF25D	25	30	15	15	80	122	100	92	11	17.5	11	6205ZZ	C25	1400
FF30D	30	32	15	17	90	138	116	106	11	17.5	11	6206ZZ	C30	1800
FF35	35	34	15	19	100	154	132	120	11	17.5	11	6207ZZ	C35	2050
FF40	40	36	18	18	120	176	150	128	14	20	13	6208ZZ	C40	3050

CK/CF Type Support Unit


Low Center Type for Fixture /
Low Center Type for Support




Please, download CAD DATA from www.sungilfa.com



CK 8 ~ 15

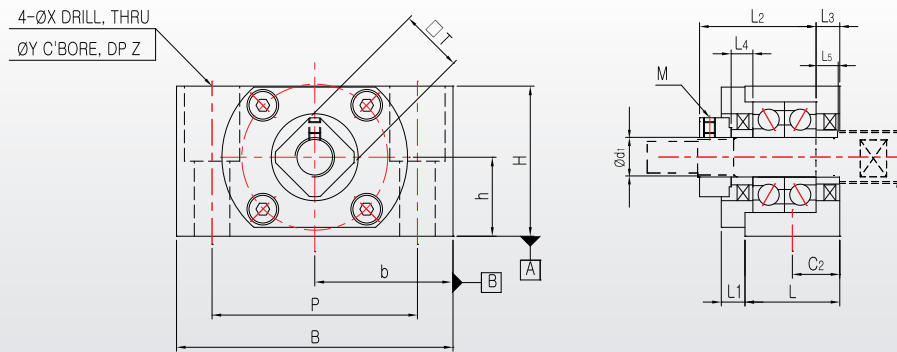

CF 8 ~ 15

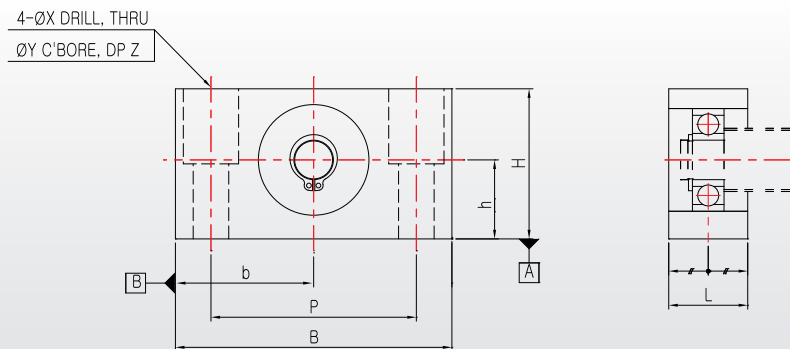

Note

1. The surfaces A and B are reference for installation. Please, use the accurate size spacer if adjusting height is necessary.
2. Do not disassemble the support unit since the preload of the bearing has already been adjusted.
3. Appropriate amount of grease is filled in the bearing of fixed-side support unit.
4. Please refer to page 62 about bearing type and characteristic according to Support Unit grade
5. Please refer to page 82 for fastening torque of the lock nut.

Unit : mm

Model No.	d ₁	L	L ₁	L ₂	L ₃	B	H	b±0.02	h±0.02	P	C ₂	X	Y	Z	Collar Size		M	□T	Mass (g)
															L ₄	L ₅			
CK8	8	21.5	4	26.5	3.5	62	31	31	15.5	46	11	9	14	18	6	6	M3x0.5	14	260
CK10	10	24	6	29.5	6	70	38	35	20	52	12	9	14	19	5.5	5.5	M4x0.7	16	430
CK12	12	24	6	29.5	6	70	38	35	20	52	12	9	14	19	5.5	5.5	M4x0.7	19	430
CK15	15	25	6	38	5	80	42	40	22	60	12.5	11	17	23	10	10	M4x0.7	22	540

Unit : mm

Model No.	d ₁	L	B	H	b±0.02	h±0.02	P	X	Y	Z	Bearing	Snap Ring	Mass(g)
CF8	6	16	62	31	31	15.5	46	9	14	18	606ZZ	C6	165
CF12 ★	10	20	70	38	35	20	52	9	14	19	6000ZZ	C10	285
CF15	15	20	80	42	40	22	60	9	14	23	6002ZZ	C15	355

★CF12 is used to the CK10, CK12 into the common support unit.

WBK type Support Unit

Miniature Type




RoHS COMPLIANT
REACH
The new EU chemicals legislation

Please, download CAD DATA from www.sungilfa.com

WBK TYPE Miniature Support Unit

- Support unit can be applied when precision miniature ball screw is used.

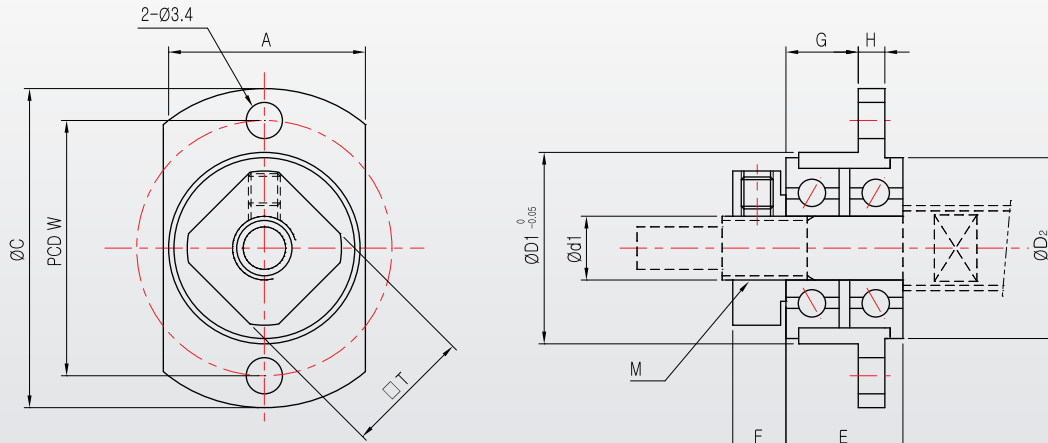

Note

1. Tighten locknut as flange type miniature ball bearing can be slightly detached from surface due to vibration during operation.
2. To prevent the collar which is inserted from slipping out, fasten it with a bolt when release

Unit : mm

Model No.	d ₁	A	C	D ₁	D ₂	E	F	G	H	W	U	M	Space
WBK04	4	14	25	13	12.5	9	5	5	2.5	19	10	M4×0.5	Ø8×Ø4×1 - 1EA
WBK06	6	19	30	18	17	11	5	6.8	2.5	24	12	M6×0.75	Ø9.1×Ø6×1 - 1EA

Types of Support Units and Applicable Outer Diameter of Screw Shaft


Inner Diameter of the Fixed-side (mm)	Applicable Model No. of the Fixed-side	Inner Diameter of the Support-side (mm)	Applicable Model No. of the Support-side	Applicable Shaft Outer Diameter (mm)
Ø4	EK4 / FK4	-	-	Ø6
Ø5	EK5 / FK5	-	-	Ø8
Ø6	BK6 / EK6 / FK6	Ø6	BF6 / EF6 / FF6	Ø8
Ø8	AK8 / BK8 / EK8 / FK8	Ø6	AF8 / BF8 / EF8 / FF8	Ø10, Ø12
Ø10	AK10 / BK10 / EK10 / FK10	Ø8	AF10 / BF10 / EF10 / FF10	Ø14, Ø15
Ø12	AK12 / BK12 / EK12 / FK12	Ø10	AF12 / BF12 / EF12 / FF12	Ø16, Ø18
Ø15	AK15 / BK15 / EK15 / FK15	Ø15	AF15 / BF15 / EF15 / FF15	Ø20, Ø25
Ø17	BK17 / FK17	Ø17	BF17 / FF17	Ø25
Ø20	AK20 / BK20 / EK20 / FK20	Ø20	AF20 / BF20 / EF20 / FF20	Ø28, Ø30, Ø32
Ø25	BK25 / EK25 / FK25	Ø25	BF25 / EF25 / FF25	Ø36
Ø30	BK30 / FK30	Ø30	BF30 / FF30	Ø40, Ø45
Ø35	BK35 / FK35	Ø35	BF35 / FF35	Ø45
Ø40	BK40 / FK40	Ø40	BF40 / FF40	Ø50, Ø55

SWBK Type Support Unit

Support unit for High-load applications



CAD DATA는 www.sungilfa.co.kr 에서 내려 받으시기 바랍니다.

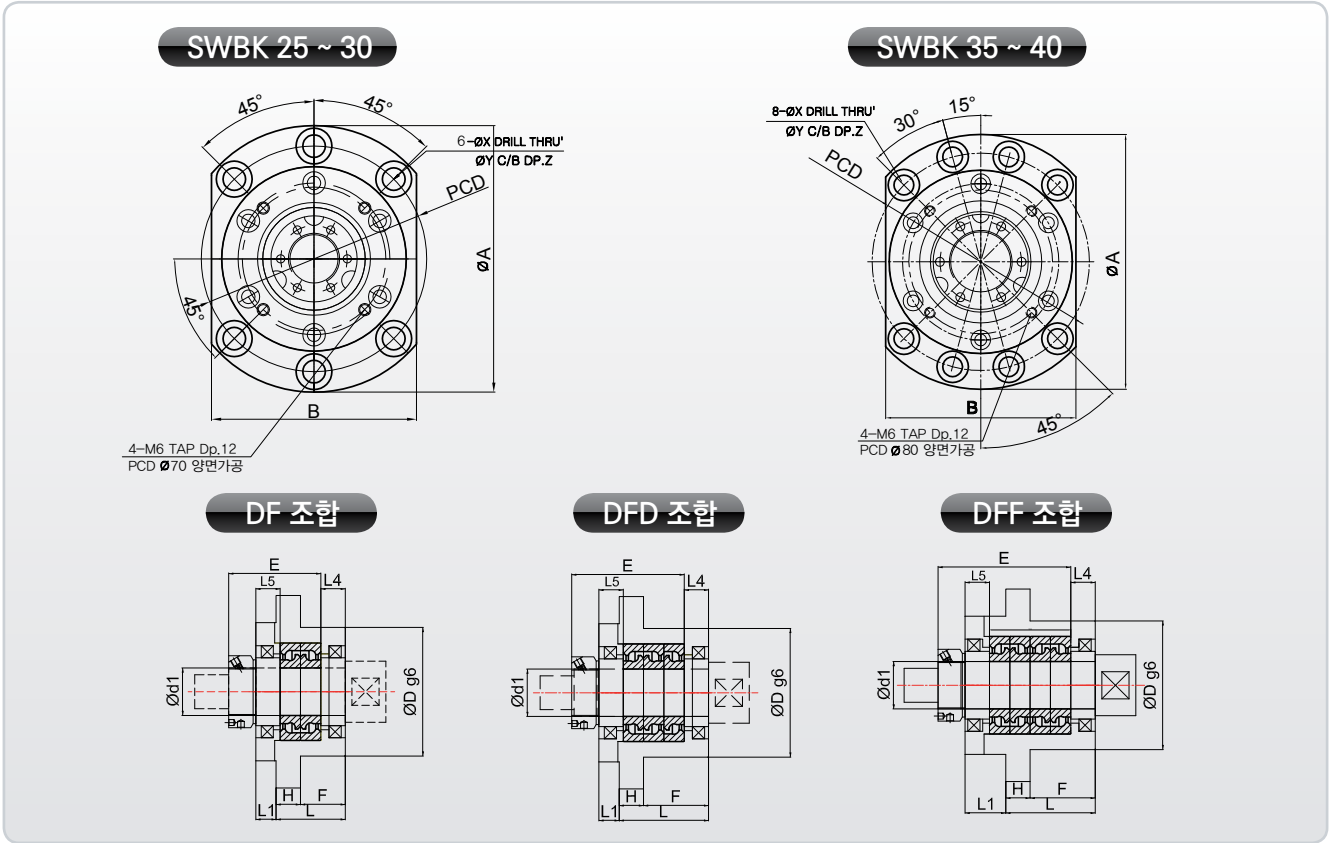

Dimension and performance

Model no.	d ₁	L	H	F	E	D	A	P.C.D	B	L ₁	X	Y	Z
SWBK25 DF	25	51	18	33	68	85	130	110	100	15	11	17.5	11
SWBK25 DFD	25	66	18	48	83	85	130	110	100	15	11	17.5	11
SWBK30 DF	30	51	18	33	68	85	130	110	100	15	11	17.5	11
SWBK30 DFD	30	66	18	48	83	85	130	110	100	15	11	17.5	11
SWBK35 DF	35	51	18	33	68	95	142	121	106	15	11	17.5	11
SWBK35 DFD	35	66	18	48	83	95	142	121	106	15	11	17.5	11
SWBK35 DFF	35	66	18	48	98	95	142	121	106	30	11	17.5	11
SWBK40 DF	40	51	18	33	68	95	142	121	106	15	11	17.5	11
SWBK40 DFD	40	66	18	48	83	95	142	121	106	15	11	17.5	11

Bearing type and performance

Model no.	Bearing type	Basic dynamic rated load (Kgf)	Static permissible load (Kgf)	Pre-load (Kgf)	Axial stiffness (kgf/μm)	Starting torque (kgf·m)
SWBK25 DF	25TAC 62B	2910	4150	320	100	2
SWBK25 DFD	25TAC 62B	4700	8300	440	150	3
SWBK30 DF	30TAC 62B	2980	4400	340	105	2.5
SWBK30 DFD	30TAC 62B	4850	8800	360	155	3
SWBK35 DF	35TAC 72B	3150	5100	390	120	3
SWBK35 DFD	35TAC 72B	5150	10200	530	175	4
SWBK35 DFF	35TAC 72B	5150	10200	780	240	5.5
SWBK40 DF	40TAC 72B	3250	5300	400	125	3
SWBK40 DFD	40TAC 72B	5250	10600	540	185	4
SWBK40 DFF	40TAC 72B	5250	10600	800	245	5.5

FA Unit



SJU Type Joint Unit

Support Unit + Servo Motor Mount Plate



Please, download CAD DATA from www.sungilfa.com





Features

- **Simple assembly** : It is easy to assemble the motor by the joint Unit because of the built-in servo unit.
 - **High precision** : Error of each shaft(motor and ball screw) can be eliminated because ball screw part and motor part are assembled as a one-piece structure.
- ※ **Notice** : There are two kinds of PCD according to servo motor specification. Therefore please check this dimension when you order.

SJU 8 ~ 15

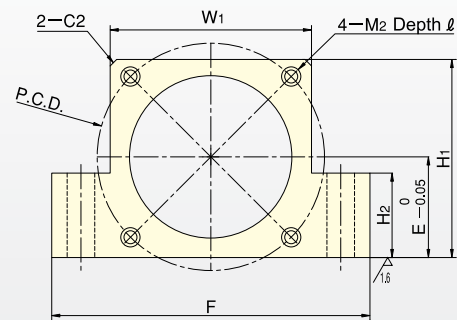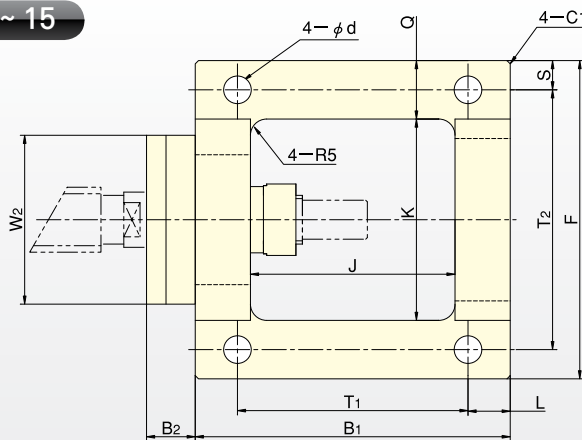

The shape shown in A part

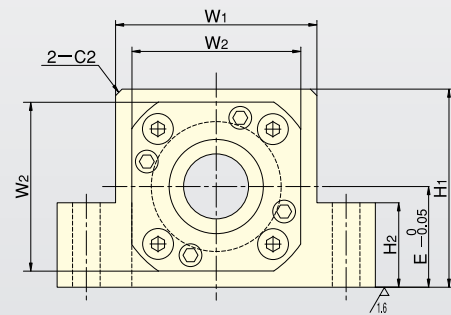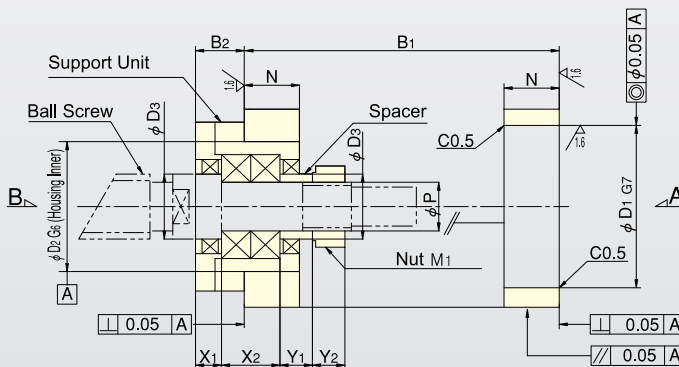

The shape shown in B part

Unit : mm

Model Name	Model No.	P	B ₁	B ₂	D ₁	D ₂	D ₃	E	F	H ₁	H ₂	J	K	L	N	Q	S	T ₁	T ₂	W ₁	W ₂	X ₁	X ₂	Y ₁	Y ₂	PCD	M ₁	M ₂	d	ℓ	Snap Ring
SJU	8A	8	67	9	30	28	12	21	64	41	19	43	40	10	12	12	6	47	52	40	35	5	14	5.5	6.5	45	M8×1	M3	5.5	8	FK8
	8B																														
	10A	10	74	13	30	34	14	25	70	46	23	46	42	10	14	14	7	54	56	42	42	8	16	5.5	8	45	M10×1	M3	6.5	8	FK10
	10B																														
	12A	12	74	13	30	36	15.1	25	72	47	23	46	44	10	14	14	7	54	58	44	44	8	16	5.5	8	45	M12×1	M3	6.5	8	FK12
	12B																														
	15	15	97	15	50	40	20	31	98	61	26	63	62	13	17	18	9	71	80	62	52	8	18	10	8	70	M15×1	M5	8.5	13	FK15

※ Please refer to catalog if you want to find SI coupling that is compatible with SI Joint Unit.

SBJU Type Joint Unit

Support Unit + Servor Motor Mount Plate




Please, download CAD DATA from www.sungilfa.com



Features

- **Simple assembly** : Simple assembly: It is easy to assemble the motor by the joint Unit because of the built-in servo unit.
 - **High precision** : Error of each shaft(motor and ball screw) can be eliminated because ball screw part and motor part are assembled as a one-piece structure.
 - The combination of angular contact ball bearings are inserted in SBJU Type.
- ※ **Notice** : There are two kinds of PCD according to servo motor specification. Therefore please check this dimension when you order.

SBJU 8 ~ 15

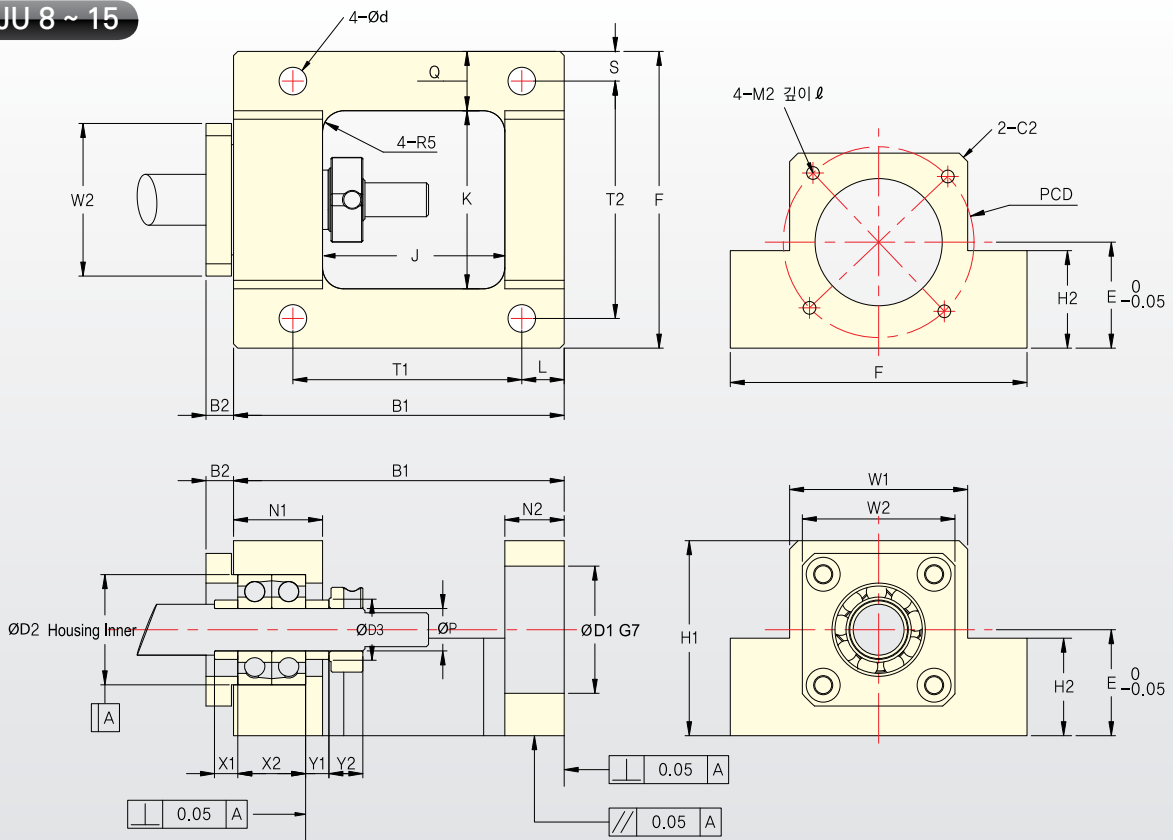

Unit : mm

Model Name	Model No.	P	B ₁	B ₂	D ₁	D ₂	D ₃	E	F	H ₁	H ₂	J	K	L	N ₁	N ₂	Q	S	T ₁	T ₂	W ₁	W ₂	X ₁	X ₂	Y ₁	Y ₂	PCD	M ₁	M ₂	d	ℓ	
SBJU	8A	8	73	6.5	30	24	12	21	64	41	19	42	40	10	19	12	12	6	47	52	40	34	7.5	14	5.5	6.5	45	M8×1	M3	5.5	8	
	8B					(22)																				46	M4					10
		10A	10	79	6.5	30	26	14	25	70	46	23	44	42	10	21	14	14	7	54	56	42	36	5.5	16	5.5	8	45	M10×1	M3	6.5	8
		10B																								46	M4			10		
		12A	12	79	6.5	30	28	15.1	25	72	47	23	44	44	10	21	14	14	7	54	58	44	36	5.5	16	5.5	8	45	M12×1	M3	6.5	8
		12B																									46	M4				
	15	15	105	6.5	50	32	20	31	98	61	26	65	62	13	23	17	18	9	71	80	62	40	10	18	10	8	70	M15×1	M5	8.5	13	

※ Please refer to catalog when you select SUNGIL coupling for combination use with this Joint Unit.

Lock Nut


Please, download CAD DATA from www.sungilfa.com

ROHS COMPLIANT REACH
The new EU chemical legislation



Note

1. A ball screw and a bearing can be precisely assembled by using LOCK NUT.
2. The set piece connected to the stop screw ensures tight fastening, thereby preventing locknut from being loosened.

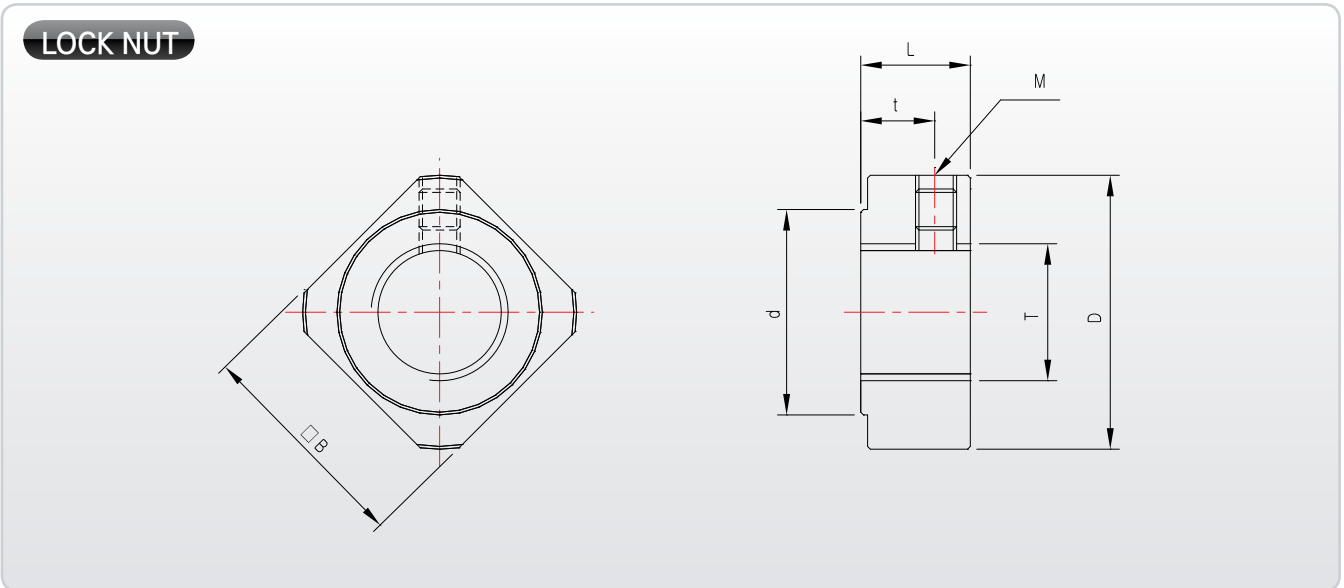

Unit : mm

Model No.	T	M	D	d	L	t	□B	Fastening Torque(Reference) (kgf.cm)
RN4	M4×0.5	M3×0.5	11	8.5	5	2.7	10	16
RN5	M5×0.5	M3×0.5	13	9	5	2.7	11	20
RN6	M6×0.75	M3×0.5	14.5	10	5	2.7	12	25
RN8	M8×1	M3×0.5	17	13	6.5	4	14	50
	★ M8×0.75							
RN10	M10×1	M4×0.7	20	15	8	5.5	16	95
	★ M10×0.75							
RN12	M12×1	M4×0.7	22	17	8	5.5	19	140
RN15	M15×1	M4×0.7	25	21	8	4.5	22	240
RN17	M17×1	M4×0.7	30	25	13	9	24	350
RN20	M20×1	M4×0.7	35	26	11	7	30	480
RN25	M25×1.5	M5×0.8	43	33	15	10	35	860
RN30	M30×1.5	M6×1	48	39	20	14	40	1,280
RN35	M35×1.5	M8×1.25	60	46	21	14	50	1,920
RN40	M40×1.5	M8×1.25	63	51	25	18	50	2,560

※ The product marked ★ is an order-based one.



Bearing Unit

Please, download CAD DATA from www.sungilfa.com



Single Bearing Type

SBS -

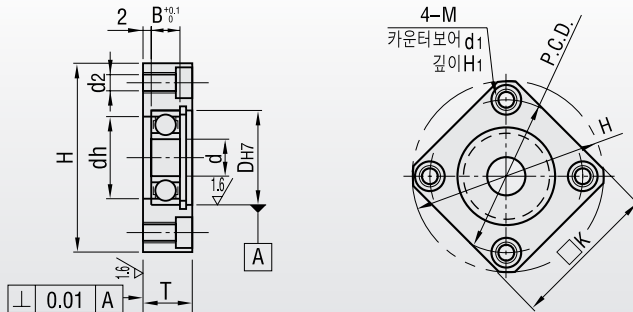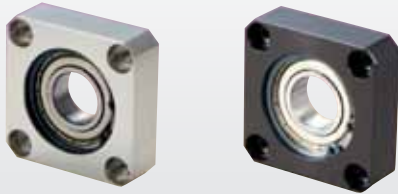


Dimension

Model No.	$\varnothing d$	$\varnothing D_{H7}$	B	$\varnothing H$	$\square K$	T	dh	PCD	M	$\varnothing d_2$	$\varnothing d_1$	H_1	Bearing
SBS-8	8	22	7	45	36	12	18	35	5	4.3	8	4.4	608ZZ
SBS-10	10	26	8	50	39	13	22	40	5	4.3	8	4.4	6000ZZ
SBS-12	12	28	8	52	40	13	24	42	5	4.3	8	4.4	6001ZZ
SBS-15	15	32	9	60	46	14	28	48	6	5.2	9.5	5.4	6002ZZ
SBS-17	17	40	12	72	54	18	34	60	6	5.2	9.5	5.4	6203ZZ
SBS-20	20	42	12	77	59	18	36	64	8	6.8	11	6.5	6004ZZ
SBS-25	25	52	15	94	72	22	45	78	10	8.5	14	8.6	6205ZZ
SBS-30	30	62	16	104	79	23	55	88	10	8.5	14	8.6	6206ZZ



Double Bearing Type

SBD -

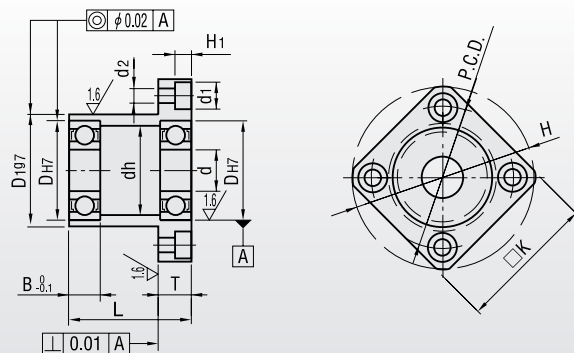

Dimension

Model No.	$\varnothing d$	$\varnothing D_{H7}$	$\varnothing D_1 g_7$	B	L	$\varnothing H$	$\square K$	T	dh	PCD	$\varnothing d_2$	$\varnothing d_1$	H_1	Bearing
SBD-8	8	22	27	7	25	45	36	8	18	35	4.3	8	4.4	608ZZ
SBD-10	10	26	32	8	30	50	39	8	22	40	4.3	8	4.4	6000ZZ
SBD-12	12	28	34	8	30	52	40	8	24	42	4.3	8	4.4	6001ZZ
SBD-15	15	32	38	9	35	60	46	10	28	48	5.2	9.5	5.4	6002ZZ
SBD-17	17	40	48	12	45	72	54	10	34	60	5.2	9.5	5.4	6203ZZ
SBD-20	20	42	50	12	45	77	59	11	36	64	6.8	11	6.5	6004ZZ
SBD-25	25	52	60	15	45	94	72	13	45	78	8.5	14	8.6	6205ZZ
SBD-30	30	62	70	16	50	104	79	13	55	88	8.5	14	8.6	6206ZZ

A.P. Lock



Sungil A.P. Lock

Sungil's Accurate & Powerful Locking Device

A.P. Lock



SAPL-A Series

S45C

SUS 304

Electroless nickel plating



SAPL-B Series

S45C



SAPL-C Series

S45C

SUS 304

Electroless nickel plating



SAPL-D1 Series

S45C



SAPL-D2 Series

S45C



SAPL-D3 Series

S45C



SAPL-D4 Series

S45C



SAPL-T Series

S45C



SAPL-R Series

S45C



SAPC

High Strength Aluminum Alloy



SAPA

High Strength Aluminum Alloy

- ※ D1, D2, D3 and D4 model has same inner(d) and outer(D) diameter combinations, thus it is very convenient and easy for them to interconvert to each others. User select one of them considering transferable torque and usability.
- ※ For B, D1, D2, D3, D4, T and R type, it is also available to be plated with electroless nickel depending on customer needs.

Verification of shaft clamping area





- Install A.P. Lock to shaft and hub in a proper way.
- Inject special penetrative lipid to confirm contact ratio between shaft and A.P. Lock.



- It is possible to check whether every inner side (except innering slit) is contacting the shaft or not.

Verification of tightening force

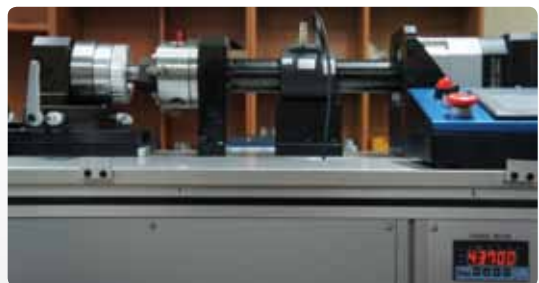

- Sungil's A.P. Lock's tightening force is verified by torque testing machine.

Design and Installation manual

Examining max torque

Maximum torque is calculated by motor's rotational speed(R.P.M), capacity and reduction ratio. (If there is no information about motor's torque) Safety factor(table below) has to be considered.

$$T_{max} = \frac{9554 \times P_{max}}{N \times i} \times SF$$

T_{max} = Max torque [N·m]
 P_{max} = Max capacity [KW]
 N = Motor rotational speed [rpm]
 i = Reduction ratio
 SF = Safety factor

Load condition		Safety Factor
Small inertia	Use less than 60% of motor's rated torque with No shock	1.5~2.0
Medium inertia	Enough time to accelerate/decelerate Reverse/non-reverse motion is limited There is little impact	2.0~3.0
Large inertia	Acceleration/ deceleration time is very short Frequent impact and vibration exists	3.0~5.0

T_{max} (motor max torque) < T_c (A.P. Lock's max allowable torque)

Motor's maximum torque (considering safety factor) must be lower than A.P.Lock's maximum allowable torque.

Thrust load

P (Max thrust load) < P_t (A.P.Lock's max allowable thrust)

Load on A.P. Lock's fastening part must be lower than it's maximum allowable thrust.

Combination of torque and thrust load

When torque and thrust load is combined, use the equation below.

$$T_{comb} = \sqrt{\left(\frac{9554 \times P_{max}}{N}\right)^2 + \left(\frac{P \times d}{2000}\right)^2} \times SF$$

T_{comb} = Combined load [N·m]
 P_{max} = Max capacity [KW]
 N = Motor rotational speed [rpm]
 d = Shaft diameter [mm]
 P = Thrust load [N]
 SF = Safety factor

T_{comb} (combined load) < T_c (A.P. Lock's max allowable torque)

Combined load of torque and thrust must be lower than A.P.Lock's maximum allowable torque.

Increasing/decreasing allowable torque

- Increasing allowable torque
 - When using several A.P. Locks, allowable torque and thrust load increases.
 - Foreign substances on shaft surface, hub surface A.P. Lock's inner and outer surface must be removed.
- Decreasing allowable torque
 - Shaft with key way decreases allowable torque by about 20% due to contact area reduction

Examining shaft design

- We recommend h7 shaft tolerance.
- Examine strength of shaft raw material

$$\sigma_s > 1.2 \times P_i$$

σ_s : Yield stress of shaft material [Mpa]
 P_i : Surface pressure on shaft [Mpa]

- Determining maximum inner diameter of hollow pipe
 - When fastening A.P. Lock, high surface pressure is applied to the shaft. When designing hollow pipe, please refer to the equation below.

$$d_i \leq d \times \sqrt{\frac{\sigma_s - 2 \times 0.8 \times P_i}{\sigma_s}}$$

d_i : Minimum inner diameter of hollow pipe
 d : Outer diameter of hollow pipe
 σ_s : Yield stress of shaft material [Mpa]
 P_i : Surface pressure on shaft [Mpa]

Examining hub design

- We recommend H7 hub tolerance
- Examine hub's material strength

$$\sigma_h > 1.2 \times P_o$$

σ_h : Yield stress of hub material [Mpa]
 P_o : Surface pressure on hub [Mpa]

Sungil A.P. Lock

Accuracy & Powerfulness

Design and Installation manual

3. Examining hub's minimum outer diameter

- Minimum outer diameter of hub with respect to raw material is shown on the catalog.
- If there is no information for specific material, use the equation below.


$$D_o \geq D_i \times \sqrt{\frac{\sigma_h + 0.8 \times P_o}{\sigma_h - 0.8 \times P_o}}$$

D_o : Outer diameter of hub [mm]

D_i : Inner diameter of hub [mm]


σ_h : Yield stress of hub material [Mpa]

P_o : Surface pressure on hub [Mpa]

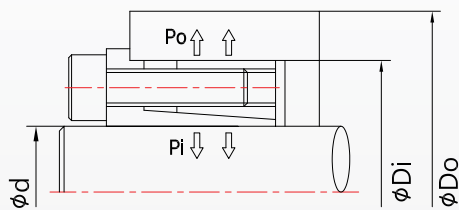


How to install (SAPL-A, B, C, D1, D2, D3, D4, T Series)


1. Clean shaft and inner side of hub (remove dust, oil and rust)
2. Clean A.P. Lock's inner side and cover's outer surface
3. Apply operation oil #68 on shaft and inner side of hub
 - Do not use oil which contains silicon or molybdenum
4. Unfasten A.P. Lock's bolts and apply operation oil #68
 - taper side of cover and body
 - Do not use oil in vacuum condition. In this case fastening force can be different with catalog
5. Pre-assemble A.P. Lock with shaft and then insert them into hub
 - Confirm whether hub's edge has contacted with A.P. Lock's flange
 - Decide shaft and hub's relative position
 - There must be more than 1mm distance between shaft's step part and hub. (If the above distance is not established, disassembly becomes difficult and the flange might be deformed.)
 - If A.P. Lock cannot be inserted into the hub smoothly, slightly unfasten the fastening bolt or slightly pound on it. (⊗ Do not strike with powerful force.)

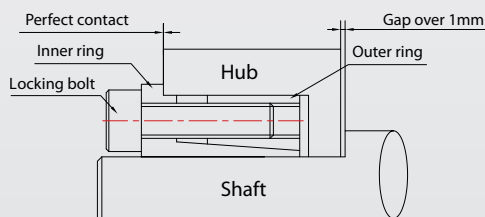


Example of SAPL-A Series installation




Example of SAPL-B Series installation




Example of SAPL-C Series installation




Example of SAPL-D1 Series installation




Example of SAPL-D2 Series installation



Example of SAPL-D3 Series installation




Example of SAPL-D4 Series installation



Example of SAPL-T Series installation

6. Fasten the bolts for complete lock



1. Must follow the order on the side figure
2. Confirm contact of outer ring flange and hub.
3. Tighten with torque wrench slowly and evenly.
 - ▶ Tighten with $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, and given tightening torque in consecutive order.
4. Confirm the perfect clamping by tightening the locking bolts several times in clockwise direction.

Sungil A.P. Lock


Accuracy & Powerfulness

Design and Installation manual

How to install (SAPC, SAPA)

1. Clean shaft, inner side of hub and A.P. Lock's outer/inner surface (remove dust, oil)
2. There is no need of operation oil when using aluminum A.P.Lock.
3. Pre-assemble A.P. Lock with shaft and then insert them into hub
 - Confirm whether hub's edge has contacted with A.P.Lock's flange
 - Determine shaft and hub's relative position.
(Use calipers or other measuring tools)
 - If A.P.Lock cannot be inserted into the hub smoothly, slightly unfasten the fastening bolt or slightly pound on it.
(※ Do not strike with powerful force.)


Confirm the hub edge attachment



Example of SAPC Series installation

※ SAPA install structure is the same as SAPL-A Series.


4. Fasten the bolts in a proper way for complete locking



1. Must follow the order on the side figure
2. Confirm contact of outer ring flange and hub.
3. Tighten with torque wrench slowly and evenly.
 - ▶ Tighten with $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, and given tightening torque in consecutive order.
4. Confirm the perfect clamping by tightening the locking bolts several times in clockwise direction.

How to disassemble

1. Remove load on shaft and hub (torque/thrust)
2. Remove loaded weight on A.P. Lock such as belt or chain
3. Disassemble bolts in the same order as when fastening

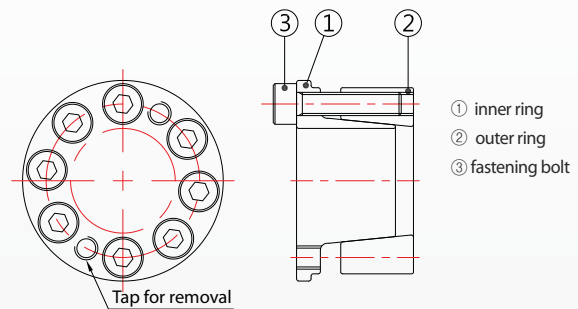


Reuse

- A.P. Lock can be used repeatedly.
- If surface pressure is stronger than shaft or hub's yield stress, shaft or hub will be deformed, and This also causes A.P. Lock's deformation.

Cautions

1. Temperature range : $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$
2. Must use torque wrench to fasten bolts
(Please Refer to the fastening torque on performance table)
3. A.P. Lock is weak at bending moment



4. If there is no proper operation oil before fastening, transmission torque reduces approximately 25% (Do not use operation oil in special environment (vacuum etc.))
5. Shaft with keyway decreases fastening force by about 20% due to contact area reduction.

SAPL-A Series

Sungil Accurate & Powerful Locking Device


'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock.



Specification


- Self centering function : prevents tiny off-centering.
- Difference between inner diameter(d) and outer diameter(D) is relatively small.
- Due to low surface pressure, it is available to relatively small sized hub.
- Standardized with inner diameter $\varnothing 5 \sim \varnothing 50$
- Simple structure and easy to assemble
- Can select stainless material(vacuum condition), electroless nickel plating(preventing corrosion)

Structure & Materials

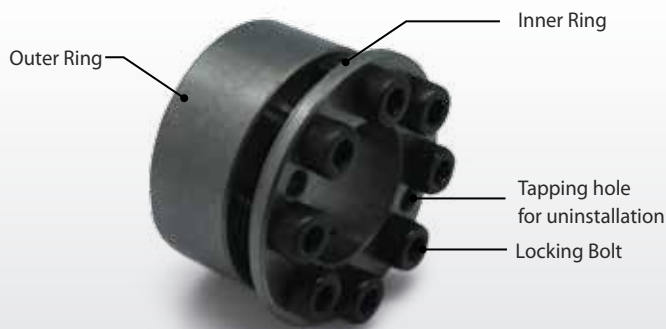


Model	Body & Cover	
	Raw material	Surface Treatment
SAPL-A	S45C	-
SAPL-AS	SUS304	-
SAPL-AK	S45C	Electroless nickel plating

Fastening Principle

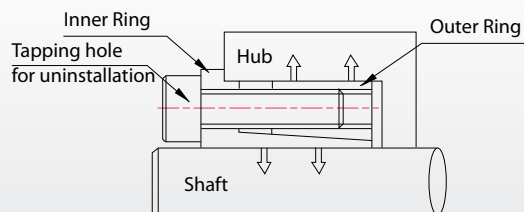


How to Order

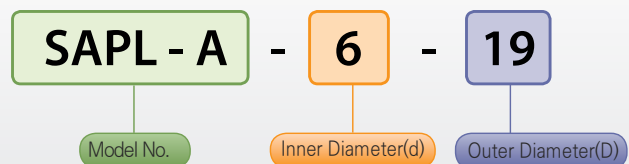

SAPL-A Series Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specifications

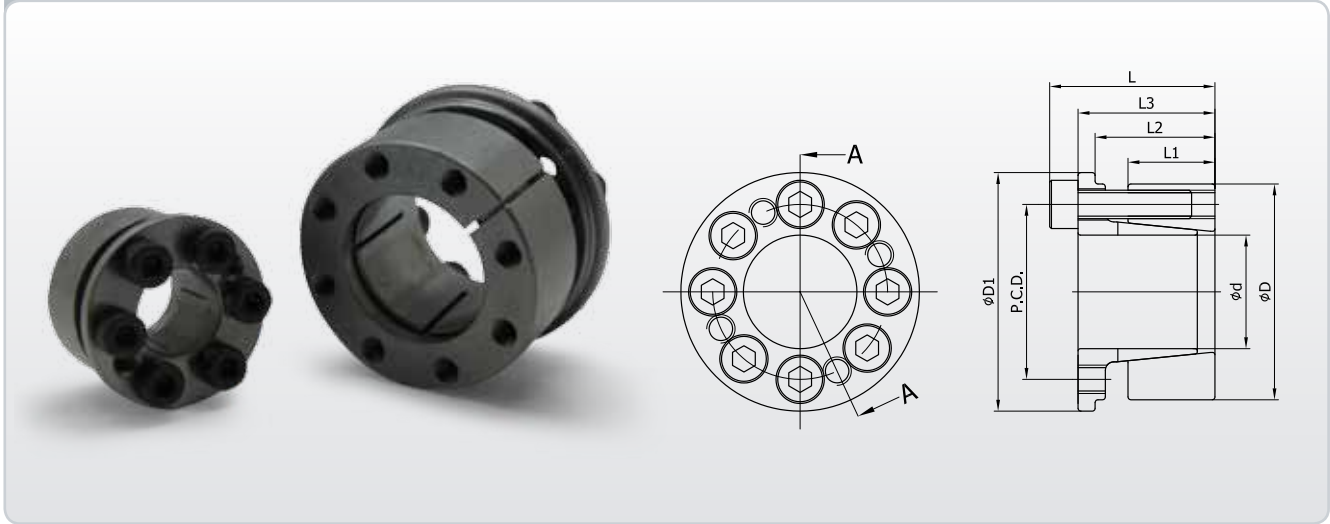

Model d x D	Dimension (mm)						Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [g]
	L ₁	L ₂	L ₃	L	D ₁	P.C.D.			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-A-5 x 16	8.0	11.2	13.0	16.0	18.5	11.7	7	2.8	249	81	M3x10	4	1.9	18
SAPL-A-6 x 19	9.0	12.3	14.3	18.3	21.5	14.0	14	4.7	318	102	M4x12	4	3.9	26
SAPL-A-6.35 x 20	9.0	12.3	14.3	18.3	22.5	14.35	14	4.67	301	97	M4x12	4	3.9	29
SAPL-A-8 x 21	9.3	12.6	14.6	18.6	23.5	15.4	22	5.6	239	107	M4x12	4	3.9	35
SAPL-A-10 x 23	9.5	12.8	14.8	18.8	25.5	17.5	25	5.6	186	96	M4x12	4	3.9	40
SAPL-A-11 x 24	9.5	13.8	15.8	19.8	26.5	18.5	30	5.6	170	92	M4x12	4	3.9	45
SAPL-A-12 x 26	10.5	15.5	18.0	22.0	28.5	20.2	50	8.4	233	115	M4x15	6	3.9	53
SAPL-A-14 x 28	10.5	15.5	18.0	22.0	30.5	22.2	65	9.5	225	120	M4x15	6	3.9	61
SAPL-A-15 x 29	11.5	16.5	19.0	23.0	31.5	23.2	70	9.5	186	106	M4x15	6	3.9	66
SAPL-A-16 x 30	12.0	17.1	19.6	23.6	33.0	24.2	75	9.5	166	98	M4x15	6	3.9	75
SAPL-A-17 x 31	12.5	17.6	20.1	24.1	33.5	25.4	110	12.6	197	121	M4x15	8	3.9	75
SAPL-A-18 x 32	12.5	17.6	20.1	24.1	34.5	26.4	115	12.6	186	118	M4x15	8	3.9	80
SAPL-A-19 x 33	12.5	17.6	20.1	24.1	35.5	27.4	120	12.6	177	114	M4x15	8	3.9	81
SAPL-A-20 x 38	15.3	21.1	24.1	29.1	42.0	30.8	220	21.6	234	139	M5x18	8	8.8	144
SAPL-A-22 x 40	15.3	21.1	24.1	29.1	44.0	32.8	290	26.0	256	159	M5x18	8	8.8	165
SAPL-A-24 x 42	16.3	22.1	25.1	30.1	46.0	34.8	320	26.0	217	142	M5x18	8	8.8	180
SAPL-A-25 x 43	17.3	23.1	26.1	31.1	47.0	35.8	350	27.2	216	137	M5x18	8	8.8	188
SAPL-A-28 x 46	17.3	23.1	26.6	31.6	50.0	38.8	380	27.0	192	127	M5x18	10	8.8	195
SAPL-A-30 x 48	17.3	23.1	26.6	31.6	52.0	40.8	410	27.0	179	122	M5x18	10	8.8	208
SAPL-A-32 x 50	18.3	24.1	27.6	32.6	54.0	42.8	440	27.0	156	110	M5x18	10	8.8	219
SAPL-A-35 x 57	19.5	26.0	30.0	36.0	62.0	48.4	720	41.1	204	138	M6x20	8	15.7	325
SAPL-A-38 x 60	20.0	26.5	30.5	36.5	65.0	51.4	770	40.2	178	125	M6x20	10	15.7	362
SAPL-A-40 x 62	20.5	27.0	31.0	37.0	67.0	53.4	810	40.2	164	118	M6x20	10	15.7	380
SAPL-A-42 x 64	20.5	27.0	31.0	37.0	69.0	55.4	850	50.2	156	114	M6x20	10	15.7	405
SAPL-A-45 x 67	21.0	27.5	31.5	37.5	72.0	58.4	1200	52.9	186	140	M6x20	10	15.7	435
SAPL-A-48 x 70	21.0	27.5	32.0	38.0	75.0	61.4	1200	48.2	159	123	M6x20	12	15.7	460
SAPL-A-50 x 72	21.5	28.0	32.5	38.5	77.0	63.4	1500	56.3	173	136	M6x20	14	15.7	485

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual


※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-AS

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specifications

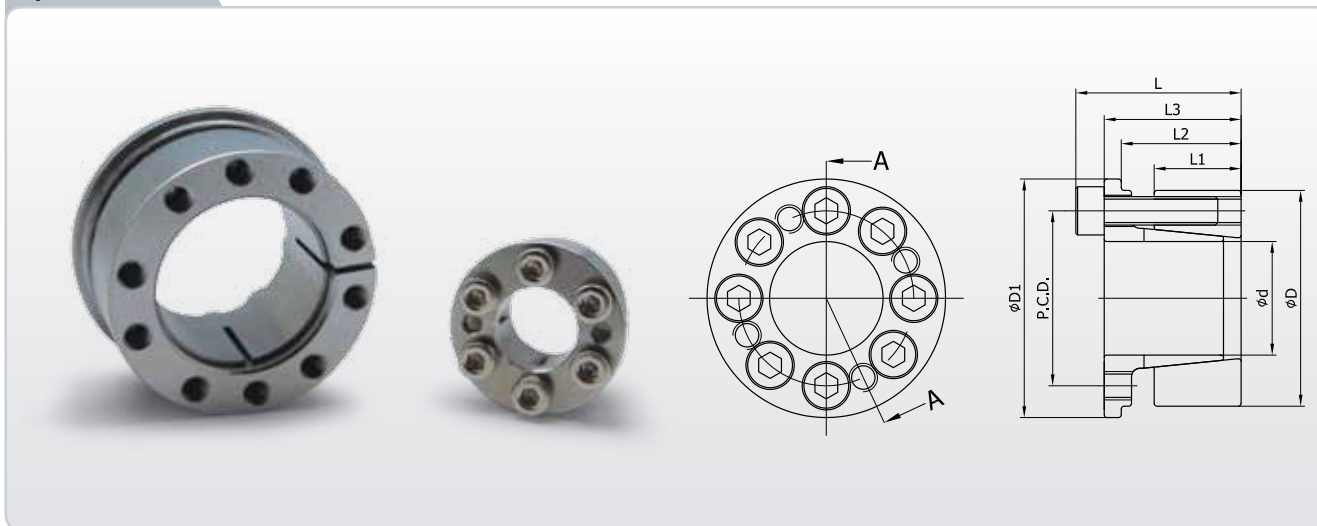

Model d x D	Dimension (mm)						Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [g]
	L ₁	L ₂	L ₃	L	D ₁	P.C.D.			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N · m]	
SAPL-AS-5 x 16	8.0	11.2	13.0	16.0	18.5	11.7	2.8	1.1	204	42	M3x12	4	1.9	18
SAPL-AS-6 x 19	9.0	12.3	14.3	18.3	21.5	14.0	7.8	2.5	260	58	M4x12	4	3.9	26
SAPL-AS-8 x 21	9.3	12.6	14.6	18.6	23.5	15.4	10.7	2.6	196	62.6	M4x12	4	2.7	35
SAPL-AS-10 x 23	9.5	12.8	14.8	18.8	25.5	17.5	12.7	2.6	153	55.9	M4x12	4	2.7	40
SAPL-AS-11 x 24	9.5	13.8	15.8	19.8	26.5	18.5	14.7	2.6	139	53.6	M4x12	4	2.7	45
SAPL-AS-12 x 26	10.5	15.5	18.0	22.0	28.5	20.2	24.5	4.0	191	67.1	M4x15	6	2.7	53
SAPL-AS-14 x 28	10.5	15.5	18.0	22.0	30.5	22.2	28.4	4.0	164	62.3	M4x15	6	2.7	61
SAPL-AS-15 x 29	11.5	16.5	19.0	23.0	31.5	23.2	30.4	4.0	136	55	M4x15	6	2.7	66
SAPL-AS-16 x 30	12.0	17.1	19.6	23.6	33.0	24.2	32.3	4.0	121	50.9	M4x15	6	2.7	75
SAPL-AS-17 x 31	12.5	17.6	20.1	24.1	33.5	25.4	46.1	5.4	144	63.1	M4x15	8	2.7	75
SAPL-AS-18 x 32	12.5	17.6	20.1	24.1	34.5	26.4	49	5.4	136	61.2	M4x15	8	2.7	80
SAPL-AS-19 x 33	12.5	17.6	20.1	24.1	35.5	27.4	51.9	5.4	129	59.2	M4x15	8	2.7	81
SAPL-AS-20 x 38	15.3	21.1	24.1	29.1	42.0	30.8	121.6	12.2	165	69.8	M5x18	8	5.6	144
SAPL-AS-22 x 40	15.3	21.1	24.1	29.1	44.0	32.8	133.4	12.1	150	66.3	M5x18	8	5.6	165
SAPL-AS-24 x 42	16.3	22.1	25.1	30.1	46.0	34.8	146.1	12.2	128	59.2	M5x18	8	5.6	180
SAPL-AS-25 x 43	17.3	23.1	26.1	31.1	47.0	35.8	153	12.2	122	54.5	M5x18	8	5.6	188
SAPL-AS-28 x 46	17.3	23.1	26.6	31.6	50.0	38.8	213.8	15.2	136	63.7	M5x18	10	5.6	195
SAPL-AS-30 x 48	17.3	23.1	26.6	31.6	52.0	40.8	229.5	15.3	127	61.1	M5x18	10	5.6	208
SAPL-AS-32 x 50	18.3	24.1	27.6	32.6	54.0	42.8	244.2	15.2	110	55.4	M5x18	10	5.6	219
SAPL-AS-35 x 57	19.5	26.0	30.0	36.0	62.0	48.4	301.1	17.2	107	51.4	M6x20	8	9.6	325
SAPL-AS-38 x 60	20.0	26.5	30.5	36.5	65.0	51.4	403	21.5	119	59.5	M6x20	10	9.6	362
SAPL-AS-40 x 62	20.5	27.0	31.0	37.0	67.0	53.4	430.6	21.5	110	56.2	M6x20	10	9.6	380

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual


※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-AK

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specifications

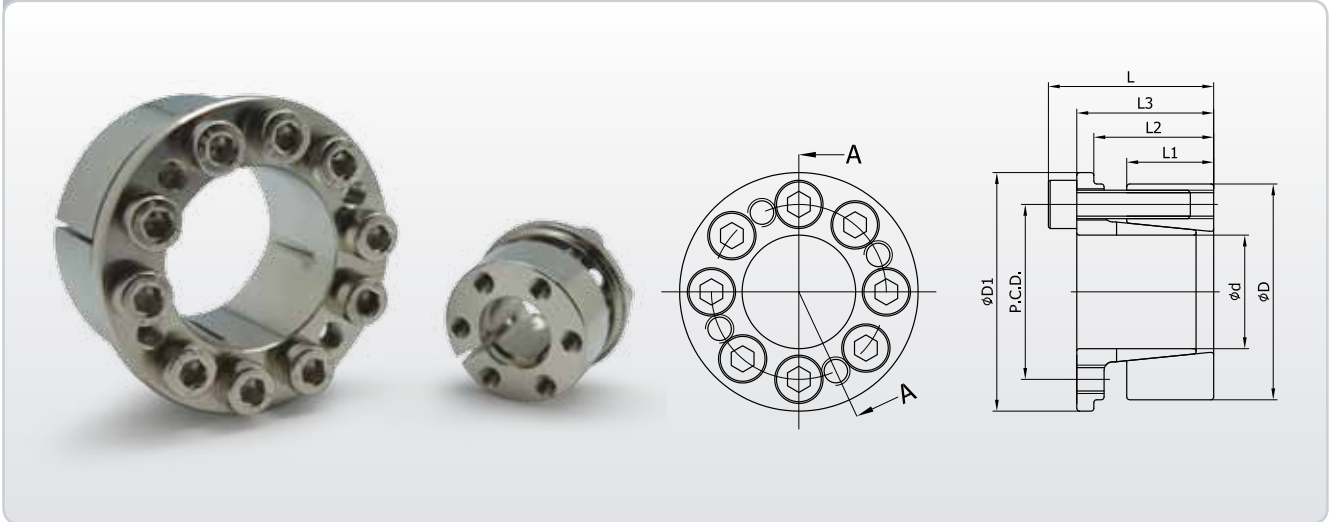

Model d x D	Dimension (mm)						Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [g]
	L ₁	L ₂	L ₃	L	D ₁	P.C.D.			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N · m]	
SAPL-AK-5 x 16	8.0	11.2	13.0	16.0	18.5	11.7	4.6	1.8	244	51	M3x12	4	1.9	18
SAPL-AK-6 x 19	9.0	12.3	14.3	18.3	21.5	14.0	10.7	2.6	256	59	M4x12	4	3.9	26
SAPL-AK-6.35 x 20	9.0	12.3	14.3	18.3	22.5	14.35	10.7	2.6	270	62	M4x12	4	3.9	29
SAPL-AK-8 x 21	9.3	12.6	14.6	18.6	23.5	15.4	16.6	4.1	244	92	M4x12	4	3.9	35
SAPL-AK-10 x 23	9.5	12.8	14.8	18.8	25.5	17.5	19.6	3.9	192	77	M4x12	4	3.9	40
SAPL-AK-11 x 24	9.5	13.8	15.8	19.8	26.5	18.5	22.5	4.0	174	73	M4x12	4	3.9	45
SAPL-AK-12 x 26	10.5	15.5	18.0	22.0	28.5	20.2	36.2	5.9	239	91	M4x15	6	3.9	53
SAPL-AK-14 x 28	10.5	15.5	18.0	22.0	30.5	22.2	50.9	7.2	204	84	M4x15	6	3.9	61
SAPL-AK-15 x 29	11.5	16.5	19.0	23.0	31.5	23.2	54.8	7.2	205	90	M4x15	6	3.9	66
SAPL-AK-16 x 30	12.0	17.1	19.6	23.6	33.0	24.2	58.8	7.3	193	87	M4x15	6	3.9	75
SAPL-AK-17 x 31	12.5	17.6	20.1	24.1	33.5	25.4	76.4	8.9	205	97	M4x15	8	3.9	75
SAPL-AK-18 x 32	12.5	17.6	20.1	24.1	34.5	26.4	80.3	8.9	166	93	M4x15	8	3.9	80
SAPL-AK-19 x 33	12.5	17.6	20.1	24.1	35.5	27.4	85.2	8.9	184	91	M4x15	8	3.9	81
SAPL-AK-20 x 38	15.3	21.1	24.1	29.1	42.0	30.8	183	18.3	213	97	M5x18	8	8.8	144
SAPL-AK-22 x 40	15.3	21.1	24.1	29.1	44.0	32.8	201	18.3	193	92	M5x18	8	8.8	165
SAPL-AK-24 x 42	16.3	22.1	25.1	30.1	46.0	34.8	252	21.0	121	105	M5x18	8	8.8	180
SAPL-AK-25 x 43	17.3	23.1	26.1	31.1	47.0	35.8	264	21.1	212	102	M5x18	8	8.8	188
SAPL-AK-28 x 46	17.3	23.1	26.6	31.6	50.0	38.8	295	21.1	212	107	M5x18	10	8.8	195
SAPL-AK-30 x 48	17.3	23.1	26.6	31.6	52.0	40.8	396	26.4	198	102	M5x18	10	8.8	208
SAPL-AK-32 x 50	18.3	24.1	27.6	32.6	54.0	42.8	423	26.0	192	103	M5x18	10	8.8	219
SAPL-AK-35 x 57	19.5	26.0	30.0	36.0	62.0	48.4	548	31.3	207	105	M6x20	8	15.7	325
SAPL-AK-38 x 60	20.0	26.5	30.5	36.5	65.0	51.4	741	39.0	208	110	M6x20	10	15.7	362
SAPL-AK-40 x 62	20.5	27.0	31.0	37.0	67.0	53.4	779	39.0	202	110	M6x20	10	15.7	380
SAPL-AK-42 x 64	20.5	27.0	31.0	37.0	69.0	55.4	823	39.2	192	106	M6x20	10	15.7	405
SAPL-AK-45 x 67	21.0	27.5	31.5	37.5	72.0	58.4	882	39.2	184	104	M6x20	10	15.7	435
SAPL-AK-48 x 70	21.0	27.5	32.0	38.0	75.0	61.4	1117	46.5	206	118	M6x20	12	15.7	460
SAPL-AK-50 x 72	21.5	28.0	32.5	38.5	77.0	63.4	1362	54.4	202	119	M6x20	14	15.7	485

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-B Series

Sungil Accurate & Powerful Locking Device


'SAP' mark(Trademark : 40-20111-0011919) is the original trademark for SUNGIL's A.P. Lock.



Features


- Self centering function : prevents tiny off-centering
- Outer diameter of cover is larger than SAPL-A type and bolt size is bigger, so it has relatively larger durability compared to same inner diameter size type of SAPL-A

Structure & Materials

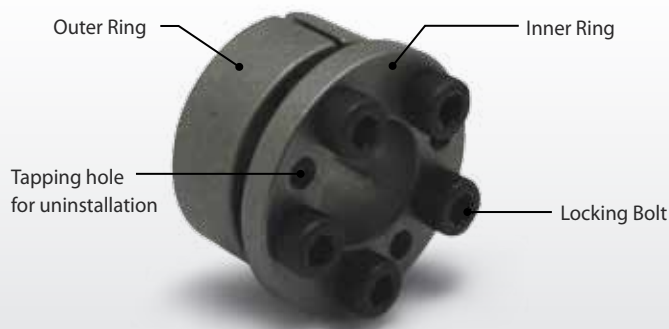


Model	Body & Cover	
	material	Surface Treatment
SAPL-B	S45C	-

Fastening Principle

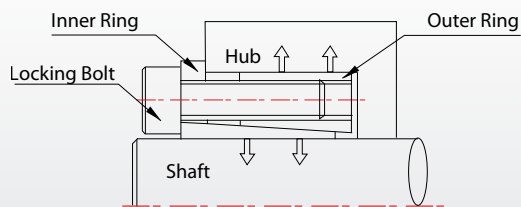

How to Order

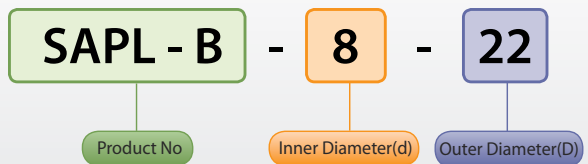

SAPL-B Series

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification



Model d x D	Dimension (mm)						Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [g]
	L ₁	L ₂	L ₃	L	D ₁	P.C.D.			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-B-8 x 22	10.0	13.0	17.0	21.0	25.0	17.0	18	5	274	70	M4 x 15	3	4	45
SAPL-B-9 x 23	10.0	13.0	17.0	21.0	26.0	18.0	21	5	243	67	M4 x 15	3	4	50
SAPL-B-10 x 24	10.0	13.0	17.0	21.0	27.0	19.0	29	6	294	85	M4 x 15	4	4	53
SAPL-B-11 x 25	10.0	13.0	17.0	21.0	28.0	20.0	33	6	265	82	M4 x 15	4	4	56
SAPL-B-12 x 26	10.0	13.0	17.0	21.0	29.0	21.0	46	8	304	98	M4 x 15	5	4	60
SAPL-B-13 x 27	10.0	16.0	17.0	21.0	30.0	22.0	49	7	280	95	M4 x 15	5	4	63
SAPL-B-14 x 31	12.5	16.0	21.0	26.0	34.0	25.0	69	10	261	85	M5 x 15	4	8	100
SAPL-B-15 x 32	12.5	16.0	21.0	26.0	35.0	25.0	74	10	243	82	M5 x 15	4	8	105
SAPL-B-16 x 33	12.5	16.0	21.0	26.0	36.0	26.0	78	10	228	79	M5 x 15	4	8	110
SAPL-B-17 x 34	12.5	16.0	21.0	26.0	37.0	27.0	103	12	268	97	M5 x 15	5	8	115
SAPL-B-18 x 35	12.5	16.0	21.0	26.0	38.0	28.0	108	12	253	94	M5 x 15	5	8	120
SAPL-B-19 x 47	20.0	24.0	32.0	38.0	53.0	33.0	284	29	284	92	M6 x 22	6	16	355
SAPL-B-20 x 47	20.0	24.0	32.0	38.0	53.0	33.0	294	29	270	92	M6 x 22	6	16	350
SAPL-B-22 x 47	20.0	24.0	32.0	38.0	53.0	37.0	324	29	245	92	M6 x 22	6	16	335
SAPL-B-24 x 50	20.0	24.0	32.0	38.0	56.0	40.0	412	34	262	101	M6 x 22	7	16	380
SAPL-B-25 x 50	20.0	24.0	32.0	38.0	56.0	40.0	431	34	252	101	M6 x 22	7	16	370
SAPL-B-28 x 55	20.0	24.0	32.0	38.0	62.0	45.0	471	34	225	92	M6 x 22	7	16	440
SAPL-B-30 x 55	20.0	24.0	32.0	38.0	62.0	45.0	510	34	210	92	M6 x 22	7	16	425

※ Pt (allowable thrust) indicates value when torque is 0, Tc (max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※ For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-C Series

Sungil Accurate & Powerful Locking Device


'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock.



Features


- Self centering function : prevents tiny off-centering
- Difference between inner diameter(d) and outer diameter(D) is very small. Due to low surface pressure, it is available to relatively small sized hub (The most compact design of A.P. Lock)
- Fits short hub.
- No hub movement when fastening because inner ring contacts hub surface
- Can select stainless material (vacuum condition) or electroless nickel plating (preventing corrosion)

Structure & Materials

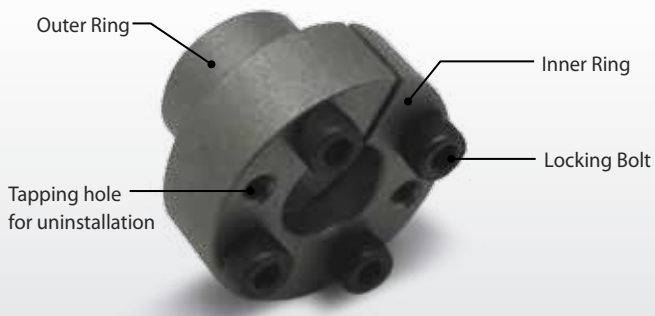


Model	Body & Cover	
	material	Surface Treatment
SAPL-C	S45C	-
SAPL-CS	SUS304	-
SAPL-CK	S45C	Electroless nickel plating

Fastening Principle

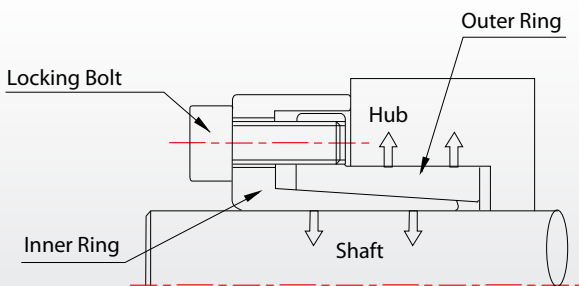

How to Order

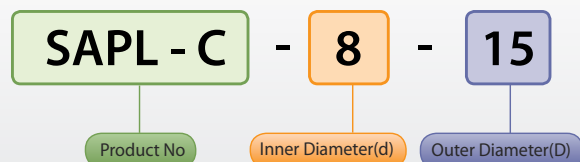


SAPL-C Series

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification

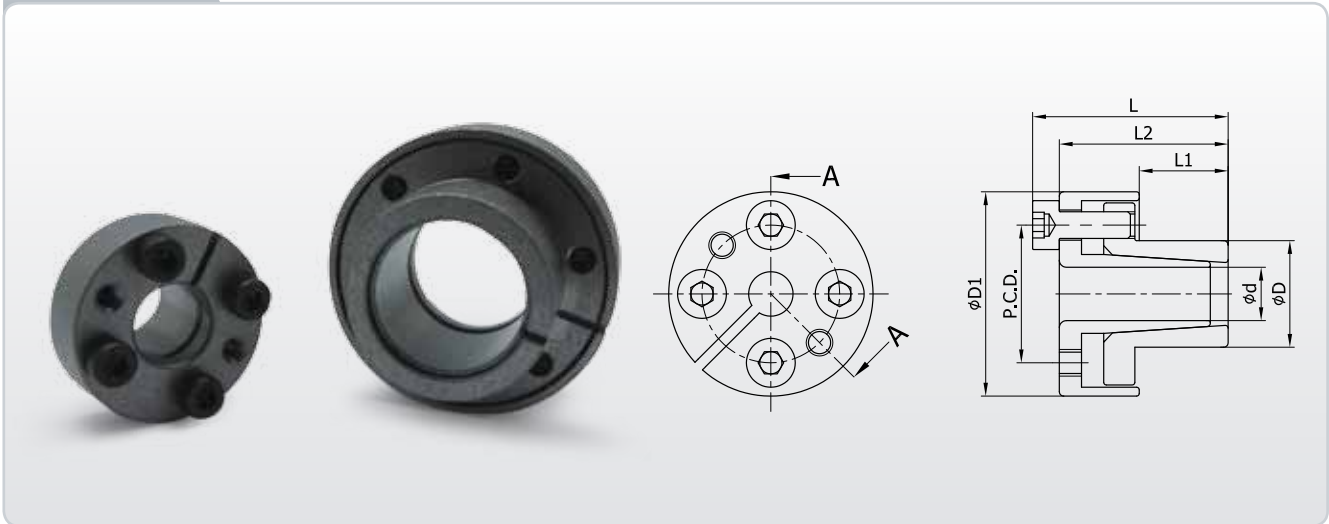

Model d x D	Dimension (mm)					Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [g]
	L ₁	L ₂	L	D ₁	P.C.D.			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-C-5 x 12	10.0	19.0	22.0	23.0	15.5	9	3.45	188	99	M3x8	4	1.7	36
SAPL-C-6 x 12	10.0	19.0	22.0	23.0	15.5	11	3.45	156	99	M3x8	4	1.7	34
SAPL-C-8 x 15	12.0	23.0	27.0	28.0	19.5	25	6.09	174	116	M4x10	4	4	61
SAPL-C-10 x 18	12.0	23.0	27.0	31.5	22.5	44	8.71	193	134	M4x10	5	4	78
SAPL-C-11 x 18	12.0	23.0	27.0	31.5	22.5	48	8.71	176	134	M4x10	5	4	75
SAPL-C-12 x 20	12.0	23.0	27.0	33.5	24.5	53	8.71	161	121	M4x10	5	4	86
SAPL-C-14 x 22	12.0	23.0	27.0	35.5	26.5	61	8.71	138	110	M4x10	5	4	94
SAPL-C-15 x 23	14.0	27.0	32.0	38.5	28.5	115	15.3	178	150	M5x12	4	8	135
SAPL-C-16 x 24	14.0	27.0	32.0	39.5	29.5	123	15.3	167	144	M5x12	4	8	140
SAPL-C-17 x 25	14.0	27.0	32.0	40.5	30.5	131	15.3	158	138	M5x12	4	8	146
SAPL-C-18 x 26	14.0	30.0	36.0	46.0	33.0	210	23.2	195	198	M6x14	4	14	221
SAPL-C-19 x 27	14.0	30.0	36.0	47.0	34.0	221	23.2	185	191	M6x14	4	14	228
SAPL-C-20 x 28	14.0	30.0	36.0	48.0	35.0	233	23.2	176	184	M6x14	4	14	235
SAPL-C-22 x 32	16.0	32.0	38.0	52.0	39.0	256	23.2	146	141	M6x14	4	14	287
SAPL-C-24 x 34	16.0	32.0	38.0	54.0	41.0	279	23.2	134	133	M6x14	4	14	302
SAPL-C-25 x 34	16.0	32.0	38.0	54.0	41.0	291	23.2	128	133	M6x14	4	14	293
SAPL-C-28 x 39	20.0	36.0	42.0	59.0	46.0	488	34.8	146	139	M6x14	6	14	378
SAPL-C-30 x 41	20.0	36.0	42.0	61.0	48.0	523	34.8	136	132	M6x14	6	14	396

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual


※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-CS

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification

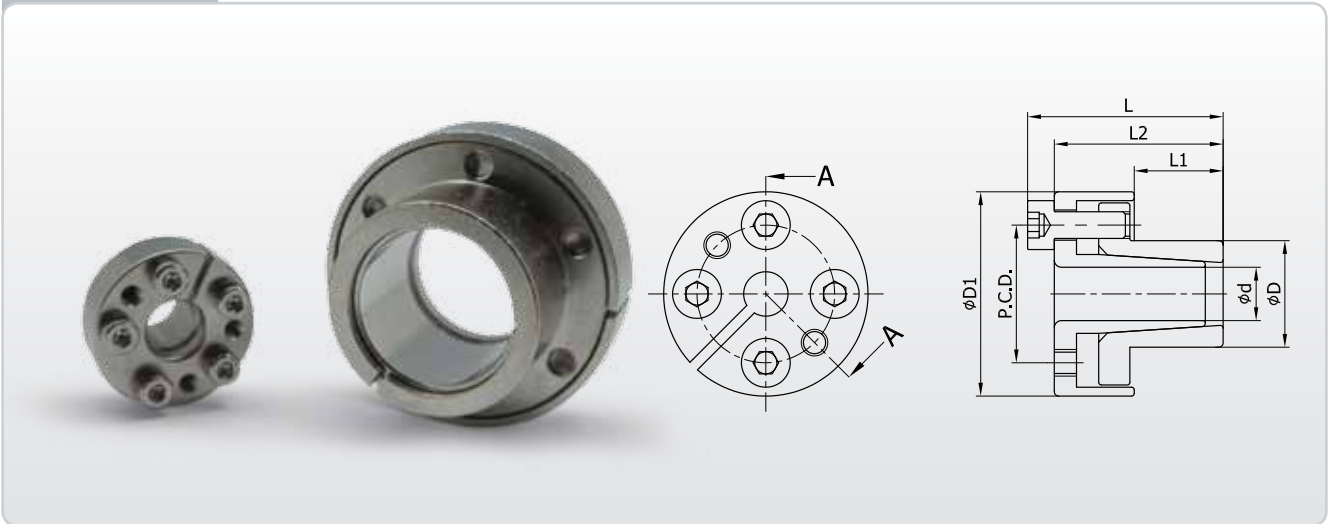

Model d x D	Dimension (mm)					Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [g]
	L ₁	L ₂	L	D ₁	P.C.D.			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-CS-5 x 12	10.0	19.0	22.0	23.0	15.5	3	1.05	57	30	M3x8	4	1.1	36
SAPL-CS-6 x 12	10.0	19.0	22.0	23.0	15.5	4	1.05	48	30	M3x8	4	1.1	34
SAPL-CS-8 x 15	12.0	23.0	27.0	28.0	19.5	8	1.92	55	37	M4x10	4	2.7	61
SAPL-CS-10 x 18	12.0	23.0	27.0	31.5	22.5	14	2.75	61	43	M4x10	5	2.7	78
SAPL-CS-11 x 18	12.0	23.0	27.0	31.5	22.5	16	2.75	56	43	M4x10	5	2.7	75
SAPL-CS-12 x 20	12.0	23.0	27.0	33.5	24.5	17	2.75	51	39	M4x10	5	2.7	86
SAPL-CS-14 x 22	12.0	23.0	27.0	35.5	26.5	20	2.75	44	35	M4x10	5	2.7	94
SAPL-CS-15 x 23	14.0	27.0	32.0	38.5	28.5	38	5	59	49	M5x12	4	5.6	135
SAPL-CS-16 x 24	14.0	27.0	32.0	39.5	29.5	41	5	55	47	M5x12	4	5.6	140
SAPL-CS-17 x 25	14.0	27.0	32.0	40.5	30.5	43	5	52	46	M5x12	4	5.6	146
SAPL-CS-18 x 26	14.0	30.0	36.0	46.0	33.0	68	7.4	63	64	M6x14	4	9.6	221
SAPL-CS-19 x 27	14.0	30.0	36.0	47.0	34.0	71	7.4	60	62	M6x14	4	9.6	228
SAPL-CS-20 x 28	14.0	30.0	36.0	48.0	35.0	75	7.4	57	59	M6x14	4	9.6	235
SAPL-CS-22 x 32	16.0	32.0	38.0	52.0	39.0	83	7.4	47	46	M6x14	4	9.6	287
SAPL-CS-24 x 34	16.0	32.0	38.0	54.0	41.0	90	7.4	43	43	M6x14	4	9.6	302
SAPL-CS-25 x 34	16.0	32.0	38.0	54.0	41.0	94	7.4	42	43	M6x14	4	9.6	293
SAPL-CS-28 x 39	20.0	36.0	42.0	59.0	46.0	157	11.1	47	45	M6x14	6	9.6	378
SAPL-CS-30 x 41	20.0	36.0	42.0	61.0	48.0	168	11.1	44	43	M6x14	6	9.6	396

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual


※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-CK

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification

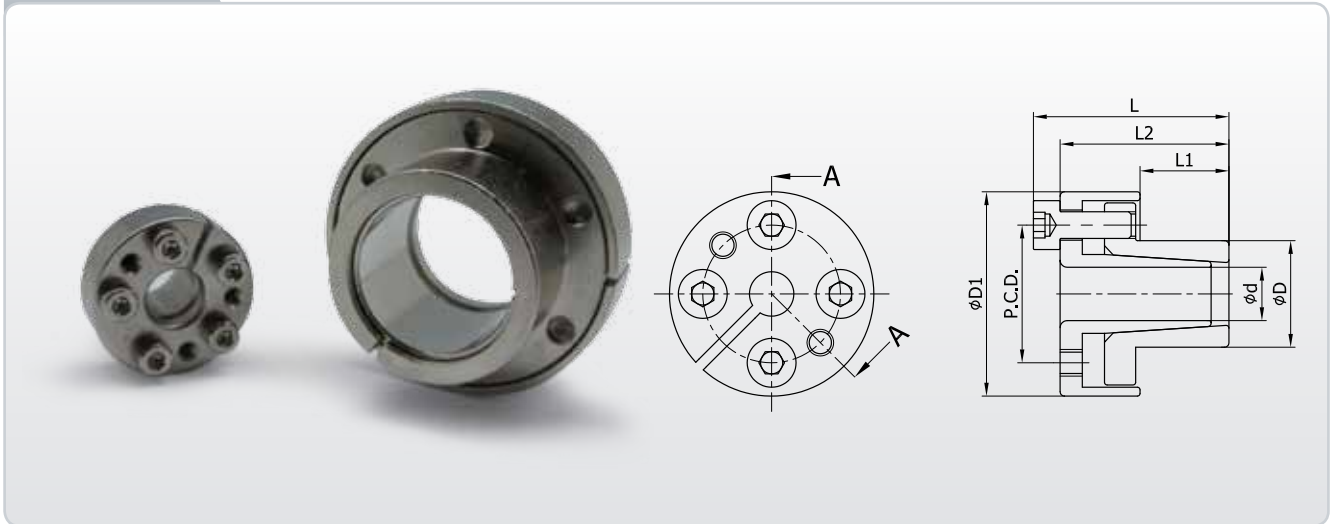

Model d x D	Dimension (mm)					Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [g]
	L ₁	L ₂	L	D ₁	P.C.D.			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-CK-5 x 12	10.0	19.0	22.0	23.0	15.5	9	3.45	188	99	M3x8	4	1.7	36
SAPL-CK-6 x 12	10.0	19.0	22.0	23.0	15.5	11	3.45	156	99	M3x8	4	1.7	34
SAPL-CK-8 x 15	12.0	23.0	27.0	28.0	19.5	25	6.09	174	116	M4x10	4	4	61
SAPL-CK-10 x 18	12.0	23.0	27.0	31.5	22.5	44	8.71	193	134	M4x10	5	4	78
SAPL-CK-11 x 18	12.0	23.0	27.0	31.5	22.5	48	8.71	176	134	M4x10	5	4	75
SAPL-CK-12 x 20	12.0	23.0	27.0	33.5	24.5	53	8.71	161	121	M4x10	5	4	86
SAPL-CK-14 x 22	12.0	23.0	27.0	35.5	26.5	61	8.71	138	110	M4x10	5	4	94
SAPL-CK-15 x 23	14.0	27.0	32.0	38.5	28.5	115	15.3	178	150	M5x12	4	8	135
SAPL-CK-16 x 24	14.0	27.0	32.0	39.5	29.5	123	15.3	167	144	M5x12	4	8	140
SAPL-CK-17 x 25	14.0	27.0	32.0	40.5	30.5	131	15.3	158	138	M5x12	4	8	146
SAPL-CK-18 x 26	14.0	30.0	36.0	46.0	33.0	210	23.2	195	198	M6x14	4	14	221
SAPL-CK-19 x 27	14.0	30.0	36.0	47.0	34.0	221	23.2	185	191	M6x14	4	14	228
SAPL-CK-20 x 28	14.0	30.0	36.0	48.0	35.0	233	23.2	176	184	M6x14	4	14	235
SAPL-CK-22 x 32	16.0	32.0	38.0	52.0	39.0	256	23.2	146	141	M6x14	4	14	287
SAPL-CK-24 x 34	16.0	32.0	38.0	54.0	41.0	279	23.2	134	133	M6x14	4	14	302
SAPL-CK-25 x 34	16.0	32.0	38.0	54.0	41.0	291	23.2	128	133	M6x14	4	14	293
SAPL-CK-28 x 39	20.0	36.0	42.0	59.0	46.0	488	34.8	146	139	M6x14	6	14	378
SAPL-CK-30 x 41	20.0	36.0	42.0	61.0	48.0	523	34.8	136	132	M6x14	6	14	396

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-D1 Series

Sungil Accurate & Powerful Locking Device


'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock.



Features


- Most general locking device structure
- Simple structure and easy assembly
- Comparatively high shaft - tightening force
- Recommendable tolerance of shaft diameter : h8
- Recommendable tolerance of hub's bore diameter : H8

Structure & Materials

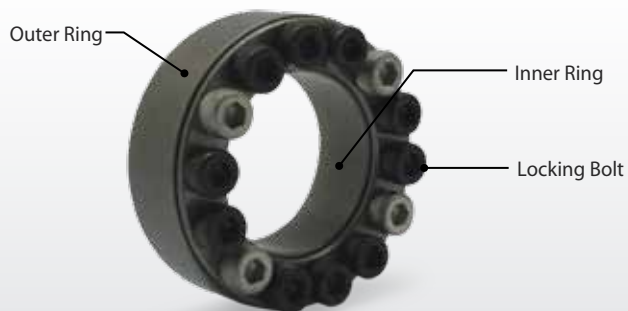


Model	Body & Cover	
	material	Surface Treatment
SAPL-D1	S45C	-

Fastening Principle

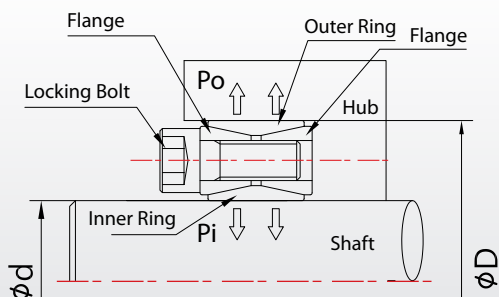

How to Order

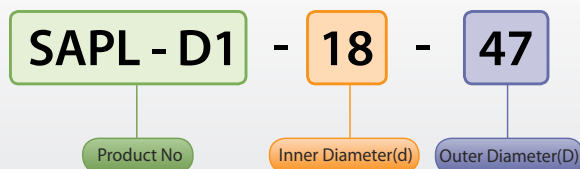

※ Reference :: In case of Using multiple SAPL-D1 Type

SAPL-D1 1 set : Tc(Max. Transferable Torque)



SAPL-D1 2 set : Tc(Max. Transferable Torque) x 1.9

SAPL-D1 3 set : Tc(Max. Transferable Torque) x 2.7

SAPL-D1 Series Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification

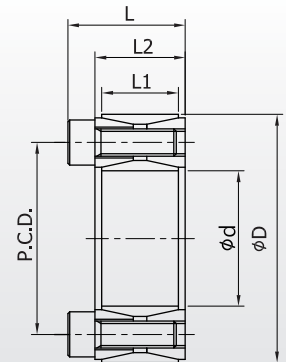

Model d x D	Dimension(mm)			Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure[N/mm ²]		Locking Bolt			Mass [kg]
	L ₁	L ₂	L			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-D1-18 x 47	17	20	26	240	26.5	210	85	M6x18	8	14.9	0.20
SAPL-D1-19 x 47	17	20	26	245	26.5	210	85	M6x18	8	14.9	0.20
SAPL-D1-20 x 47	17	20	26	265	26.5	199	85	M6x18	8	14.9	0.20
SAPL-D1-22 x 47	17	20	26	294	26.5	181	85	M6x18	8	14.9	0.19
SAPL-D1-24 x 50	17	20	26	402	33.3	211	101	M6x18	9	14.9	0.22
SAPL-D1-25 x 50	17	20	26	421	33.3	203	101	M6x18	9	14.9	0.22
SAPL-D1-28 x 55	17	20	26	470	33.3	180	92	M6x18	10	14.9	0.22
SAPL-D1-30 x 55	17	20	26	510	33.3	169	92	M6x18	10	14.9	0.24
SAPL-D1-32 x 60	17	20	26	676	42.1	198	106	M6x18	12	14.9	0.27
SAPL-D1-35 x 60	17	20	26	745	42.1	181	106	M6x18	12	14.9	0.27
SAPL-D1-38 x 65	17	20	26	892	47.0	183	107	M6x18	14	14.9	0.30
SAPL-D1-40 x 65	17	20	26	941	47.0	174	107	M6x18	14	14.9	0.30
SAPL-D1-42 x 75	20	24	32	1490	70.6	214	121	M8x22	12	35	0.51
SAPL-D1-45 x 75	20	24	32	1600	70.6	200	121	M8x22	12	35	0.51
SAPL-D1-48 x 80	20	24	32	1700	70.6	188	113	M8x22	12	35	0.55
SAPL-D1-50 x 80	20	24	32	1770	70.6	180	113	M8x22	12	35	0.55
SAPL-D1-55 x 85	20	24	32	2390	86.2	201	130	M8x22	14	35	0.60
SAPL-D1-60 x 90	20	24	32	2610	86.2	184	123	M8x22	14	35	0.64
SAPL-D1-65 x 95	20	24	32	3228	99	225	154	M8x22	16	35	0.70
SAPL-D1-70 x 110	24	28	38	4811	138	241	154	M10x25	14	69	1.24
SAPL-D1-75 x 115	24	28	38	5154	138	225	147	M10x25	14	69	1.29
SAPL-D1-80 x 120	24	28	38	5497	138	212	140	M10x25	14	69	1.35
SAPL-D1-85 x 125	24	28	38	6675	158	227	155	M10x25	16	69	1.43
SAPL-D1-90 x 130	24	28	38	7069	158	214	149	M10x25	16	69	1.5
SAPL-D1-95 x 135	24	28	38	8393	176	229	161	M10x25	18	69	1.54
SAPL-D1-100 x 145	26	33	45	10226	204	232	160	M12x30	14	69	2.2
SAPL-D1-110 x 155	26	33	45	11248	204	211	149	M12x30	14	123.3	2.3
SAPL-D1-120 x 165	26	33	45	14020	234	221	160	M12x30	16	123.3	2.4
SAPL-D1-130 x 180	34	38	50	18986	293	195	140	M12x35	20	123.3	3.6
SAPL-D1-140 x 190	34	38	50	22494	321	199	147	M12x35	22	123.3	3.9
SAPL-D1-150 x 200	34	38	50	26295	351	203	152	M12x35	24	123.3	4.0
SAPL-D1-160 x 210	34	38	50	33756	422	229	174	M12x35	26	123.3	4.3
SAPL-D1-170 x 225	38	44	58	39483	465	212	160	M14x40	22	187	5.7
SAPL-D1-180 x 235	38	44	58	45606	507	218	167	M14x40	24	187	6.0
SAPL-D1-190 x 250	46	52	66	56163	591	199	152	M14x45	28	187	8.2
SAPL-D1-200 x 260	46	52	66	63342	633	203	156	M14x45	30	187	8.6

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

※d : 65~200 model will be released in May 2015

SAPL-D2 Series

Sungil Accurate & Powerful Locking Device

'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock.



Features

- Interconvertible to D1 Series due to same combination of inner(d) and outer(D) diameter.
- More convenient than D1 since D2 has small number of locking bolts
- Axial movement may be occurred in locking procedure since there is no flange to adhere to the side surface of a Hub.
- Self centering function : prevent tiny off-centering.
- Recommendable tolerance of shaft diameter : h8
- Recommendable tolerance of hub's bore diameter : H8


Structure & Materials




Model	Body & Cover	
	material	Surface Treatment
SAPL-D2	Steel	-

※Electroless nickel plating is available.

Fastening Principle

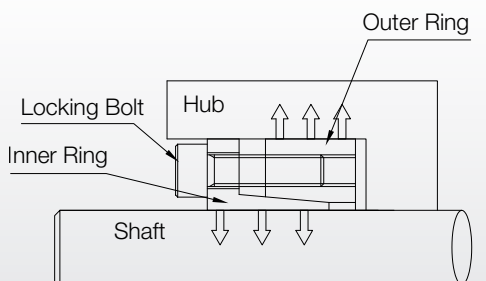

How to Order

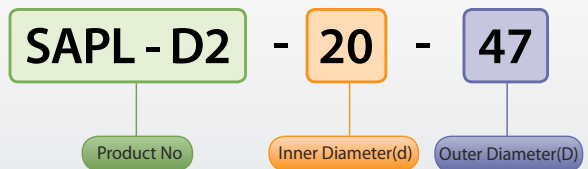

SAPL-D2 Series Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification



Model d x D	Dimension (mm)				Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [kg]
	L ₁	L ₂	L ₃	L			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-D2-19 x 47	17	22	28	34	273	29	262	106	M6x20	5	13	0.3
SAPL-D2-20 x 47	17	22	28	34	287	29	249	106	M6x20	5	13	0.3
SAPL-D2-22 x 47	17	22	28	34	316	29	227	106	M6x20	5	13	0.3
SAPL-D2-24 x 50	17	22	28	34	413	34	249	120	M6x20	6	13	0.3
SAPL-D2-25 x 50	17	22	28	34	431	34	239	120	M6x20	6	13	0.3
SAPL-D2-28 x 55	17	22	28	34	482	34	213	109	M6x20	6	13	0.4
SAPL-D2-30 x 55	17	22	28	34	517	34	199	109	M6x20	6	13	0.4
SAPL-D2-32 x 60	17	22	28	34	734	46	249	133	M6x20	8	13	0.4
SAPL-D2-35 x 60	17	22	28	34	803	46	227	133	M6x20	8	13	0.4
SAPL-D2-38 x 65	17	22	28	34	872	46	210	122	M6x20	8	13	0.4
SAPL-D2-40 x 65	17	22	28	34	918	46	199	122	M6x20	8	13	0.4
SAPL-D2-42 x 75	17	25	33	41	1573	74	261	146	M8x25	7	32	0.8
SAPL-D2-45 x 75	20	25	33	41	1674	74	244	146	M8x25	7	32	0.8
SAPL-D2-48 x 80	20	25	33	41	1750	74	220	146	M8x25	7	32	0.8
SAPL-D2-50 x 80	20	25	33	41	1860	74	219	137	M8x25	7	32	0.8
SAPL-D2-55 x 85	20	25	33	41	2340	85	228	148	M8x25	8	32	0.8
SAPL-D2-60 x 90	20	25	33	41	2553	85	209	139	M8x25	8	32	0.8

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-D3 Series

Sungil Accurate & Powerful Locking Device

'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock



Features

- Interconvertible to D1 Series due to same combination of inner(d) and outer(D) diameter.
- More convenient than D1 since D3 has small number of locking bolts.
- Axial movement do not occurred in locking procedure since there is flange to adhere to the side surface of a Hub.
- Self centering function : prevent tiny off-centering.
- Recommendable tolerance of shaft diameter : h8
- Recommendable tolerance of hub's bore diameter : H8


Structure & Materials




Model	Body & Cover	
	material	Surface Treatment
SAPL-D3	Steel	-

※Electroless nickel plating is available.

Fastening Principle

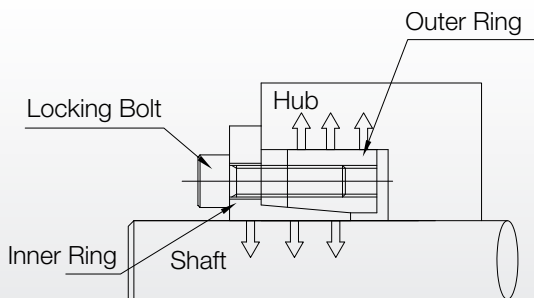

How to Order

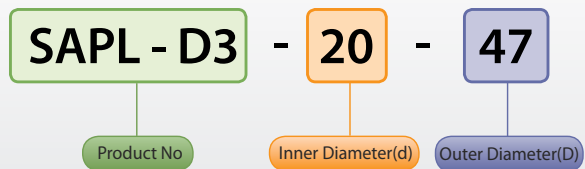

SAPL-D3 Series Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification



Model d x D	Dimension (mm)					Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [kg]
	D ₁	L ₁	L ₂	L ₃	L			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-D3-19 x 47	56	17	22	28	34	243	26	234	94	M6x20	5	17	0.3
SAPL-D3-20 x 47	56	17	22	28	34	256	26	222	94	M6x20	5	17	0.3
SAPL-D3-22 x 47	56	17	22	28	34	282	26	202	94	M6x20	5	17	0.3
SAPL-D3-24 x 50	59	17	22	28	34	368	31	222	106	M6x20	6	17	0.3
SAPL-D3-25 x 50	59	17	22	28	34	383	31	213	106	M6x20	6	17	0.3
SAPL-D3-28 x 55	64	17	22	28	34	429	31	190	97	M6x20	6	17	0.4
SAPL-D3-30 x 55	64	17	22	28	34	460	31	177	97	M6x20	6	17	0.4
SAPL-D3-32 x 60	69	17	22	28	34	655	41	222	118	M6x20	8	17	0.4
SAPL-D3-35 x 60	69	17	22	28	34	716	41	203	118	M6x20	8	17	0.4
SAPL-D3-38 x 65	74	17	22	28	34	778	41	187	109	M6x20	8	17	0.5
SAPL-D3-40 x 65	74	17	22	28	34	819	41	178	109	M6x20	8	17	0.5
SAPL-D3-42 x 75	84	20	25	33	41	1361	65	227	127	M8x25	7	41	0.8
SAPL-D3-45 x 75	84	20	25	33	41	1458	65	212	127	M8x25	7	41	0.7
SAPL-D3-48 x 80	89	20	25	33	41	1550	65	200	123	M8x25	7	41	0.8
SAPL-D3-50 x 80	89	20	25	33	41	1620	65	191	119	M8x25	7	41	0.8
SAPL-D3-55 x 85	94	20	25	33	41	2037	74	199	129	M8x25	8	41	0.9
SAPL-D3-60 x 90	99	20	25	33	41	2223	74	182	121	M8x25	8	41	0.9

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-D4 Series

Sungil Accurate & Powerful Locking Device


'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock.



Features

- Highest Transferable Torque.
- More convenient than use of double D1s since D3 has small number of locking bolts.
- Self centering function : prevent tiny off-centering.
- Recommendable tolerance of shaft diameter : h8
- Recommendable tolerance of hub's bore diameter : H8


Structure & Materials

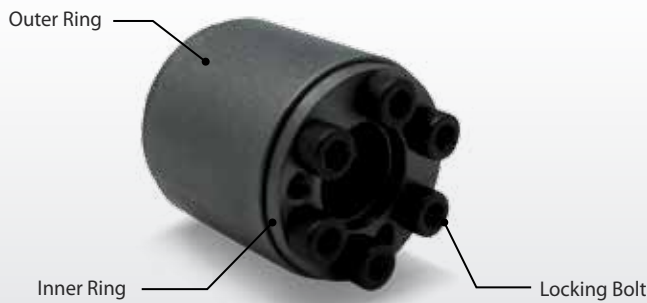


Model	Body & Cover	
	material	Surface Treatment
SAPL-D4	Steel	-

※Electroless nickel plating is available.

Fastening Principle

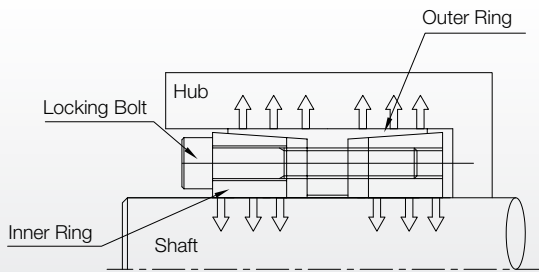

How to Order

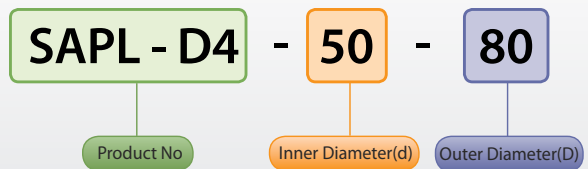

SAPL-D4 Series

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification



Model d x D	Dimension (mm)			Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/ mm ²]		Locking Bolt			Mass [kg]
	L ₁	L ₂	L			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-D4-19 x 47	39	45	51	360	40	135	60	M6	6	17	0.3
SAPL-D4-20 x 47	39	45	51	380	40	140	60	M6	6	17	0.3
SAPL-D4-22 x 47	39	45	51	425	40	125	60	M6	6	17	0.3
SAPL-D4-24 x 50	39	45	51	660	53	155	75	M6	6	17	0.3
SAPL-D4-25 x 50	39	45	51	680	53	150	75	M6	6	17	0.3
SAPL-D4-28 x 55	39	45	51	750	42	135	65	M6	8	17	0.4
SAPL-D4-30 x 55	39	45	51	790	53	120	65	M6	8	17	0.4
SAPL-D4-32 x 60	39	45	51	1250	80	165	90	M6	8	17	0.4
SAPL-D4-35 x 60	39	45	51	1400	80	155	90	M6	8	17	0.4
SAPL-D4-38 x 65	39	45	51	1650	90	160	90	M6	10	17	0.5
SAPL-D4-40 x 65	39	45	51	1750	90	150	90	M6	10	17	0.5
SAPL-D4-42 x 75	39	45	51	3100	155	200	110	M8	8	41	0.8
SAPL-D4S-45 x 75	39	45	51	3200	155	180	110	M8	8	41	0.7
SAPL-D4-45 x 75	56	64	72	3460	155	165	100	M8	8	41	0.7
SAPL-D4-48 x 80	56	64	72	3680	155	150	95	M8	8	41	0.8
SAPL-D4-50 x 80	56	64	72	3820	155	147	95	M8	8	41	0.8
SAPL-D4-55 x 85	56	64	72	4260	155	135	85	M8	8	41	0.9
SAPL-D4-60 x 90	56	64	72	5820	190	155	100	M8	10	41	0.9

※ Pt(allowable thrust) indicates value when torque is 0, Tc(max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※ For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-T Series

Sungil Accurate & Powerful Locking Device


'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock.



Features


- Optimized for a hub that has relatively small bore size.
- Self-centering function
- Simple structure and easy assembly
- Recommendable tolerance of shaft diameter : h8
- Recommendable tolerance of hub's bore diameter : H8

Structure & Materials

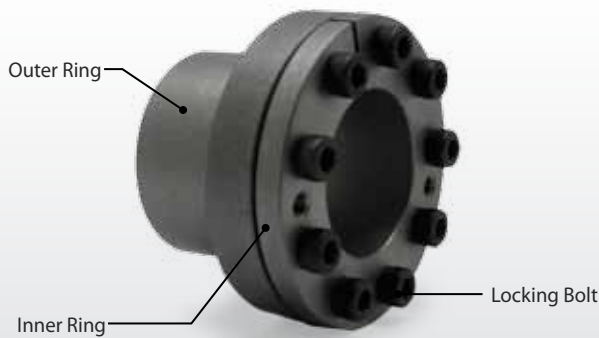


Model	Body & Cover	
	Material	Surface Treatment
SAPL-T	Steel	-

Fastening Principle

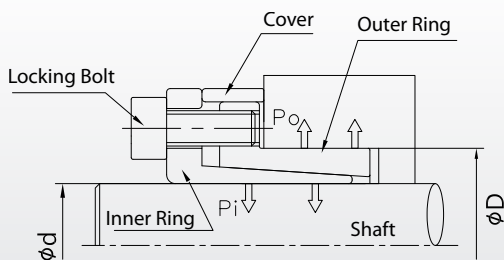

How to Order

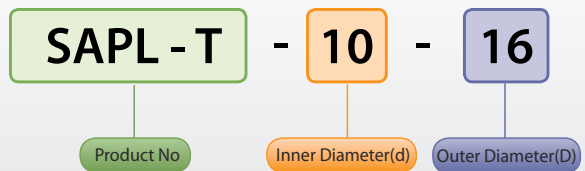


SAPL-T Series

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification

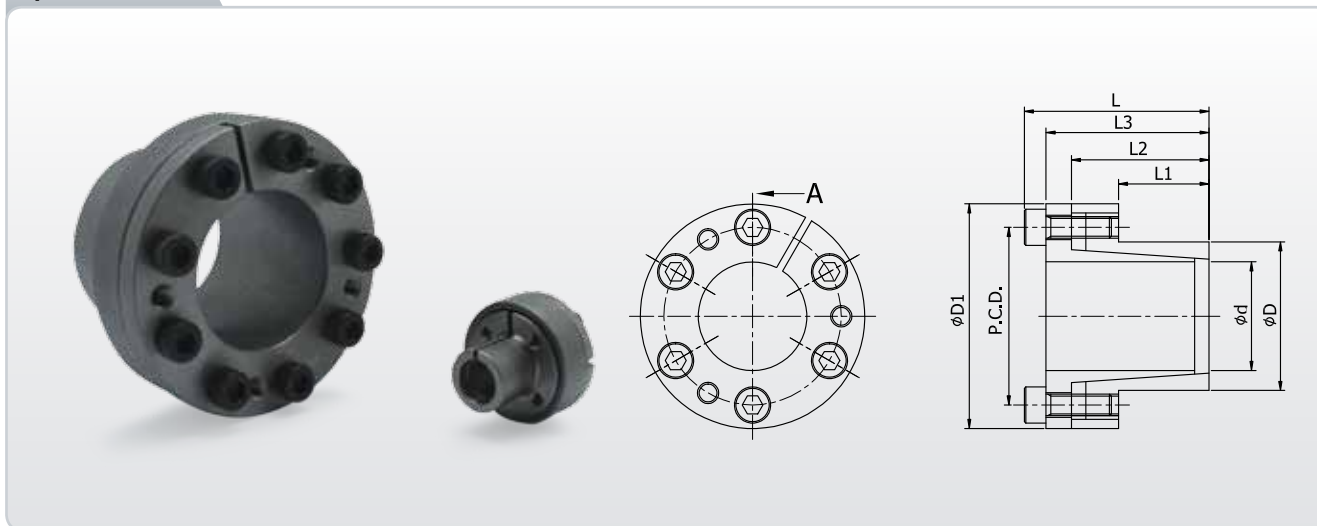

Model d x D	Dimension (mm)					Max. Allowable Torque (Tc) [N·m]	Allowable Thrust Load (Pt) [kN]	Surface Pressure [N/mm ²]		Locking Bolt			Mass [g]
	L ₁	L ₂	L ₃	L	D ₁			Shaft (Pi)	Hub (Po)	Size	Number	Tightening Torque[N·m]	
SAPL-T-6 x 14	10	18.5	21	24	25	12	4.0	185	80	M3	3	2	40
SAPL-T-7 x 15	12	12	24	28	27	25	7.0	235	110	M4	3	5	60
SAPL-T-8 x 15	12	21	24	28	28	29	7.0	205	110	M4x10	3	5	50
SAPL-T-9 x 16	14	23	27	31	32	44	10.0	205	115	M4x12	4	5	60
SAPL-T-10 x 16	14	23	27	31	32	49	10.0	185	115	M4x12	4	5	60
SAPL-T-11 x 18	14	23	27	31	34	53	10.0	170	105	M4x12	4	5	70
SAPL-T-12 x 18	14	23	27	31	34	58	10.0	160	105	M4x12	4	5	70
SAPL-T-13 x 23	14	23	27	31	39	63	10.0	140	80	M4x12	4	5	110
SAPL-T-14 x 23	14	23	27	31	39	68	10.0	130	80	M6x18	4	17	100
SAPL-T-15 x 24	16	29	36	42	45	127	17.0	185	115	M6x18	3	17	220
SAPL-T-16 x 24	16	29	36	42	45	136	17.0	175	115	M6x18	3	17	220
SAPL-T-17 x 26	18	31	38	44	47	180	22.0	190	125	M6x18	4	17	250
SAPL-T-18 x 26	18	31	38	44	47	200	22.0	180	125	M6x18	4	17	240
SAPL-T-19 x 27	18	31	38	44	48	210	22.0	170	120	M6x18	4	17	260
SAPL-T-20 x 28	18	31	38	44	49	220	22.0	160	115	M6x18	4	17	270
SAPL-T-22 x 32	25	38	45	51	54	250	22.0	115	80	M6x18	4	17	340
SAPL-T-24 x 34	25	38	45	51	56	270	22.0	105	75	M6x18	4	17	360
SAPL-T-25 x 34	25	38	45	51	56	280	22.0	100	75	M6x18	4	17	350
SAPL-T-28 x 39	25	38	45	51	61	465	33	135	97	M6x18	5	17	480
SAPL-T-30 x 41	25	38	45	51	63	510	33	127	90	M6x18	6	17	480
SAPL-T-32 x 43	30	43	50	56	65	540	33	120	90	M6x18	6	17	470
SAPL-T-35 x 47	30	43	50	56	69	790	45	105	80	M6x18	8	17	580
SAPL-T-38 x 50	30	43	50	56	72	860	45	100	75	M6x18	8	17	610
SAPL-T-40 x 53	32	45	52	58	75	900	45	95	70	M6x18	9	17	680
SAPL-T-42 x 55	32	45	52	58	77	950	45	90	85	M6x18	9	17	760
SAPL-T-45 x 59	40	56	64	72	85	1890	84	110	80	M8x22	8	41	1200
SAPL-T-48 x 62	40	56	64	72	88	2010	84	105	75	M8x22	8	41	1200
SAPL-T-50 x 65	50	66	74	82	92	2100	84	100	65	M8x22	10	41	1400

※ Pt (allowable thrust) indicates value when torque is 0, Tc (max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※ For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPL-R Series

Sungil Accurate & Powerful Locking Device

'SAP' mark(Trademark : 40-2011-001 1919) is the original trademark for SUNGIL's A.P. Lock.



Features


- Relatively lower tightening torque
- Useful in case of space restriction regarding to hub size
- Recommendable tolerance of shaft diameter : $d \leq 40\text{mm} - h6$, $d \geq 42\text{mm} - h8$
- Recommendable tolerance of hub's bore diameter : $d \leq 40\text{mm} - H7$, $d \geq 42\text{mm} - H8$

Structure & Materials



Model	Material	Surface Treatment
SAPL-R	Steel	-

Fastening Principle

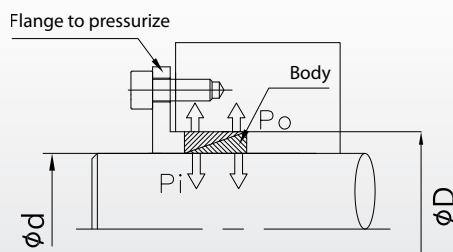

How to Order

SAPL - R

- 24 -

- 28

Product No

Inner Diameter(d)

Outer Diameter(D)

SAPL-R Series


Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Design and Installation manual

How to Design the Flange

SAPL-R is commonly used with a flange to pressurize together. The design of the flange is dependent on material properties and dimension of HUB and SHAFT

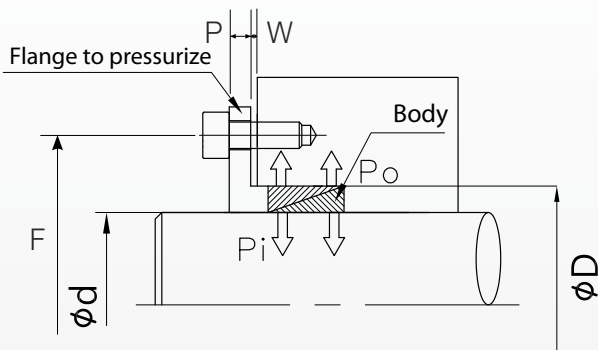

1. PCD of bolt tapping hole (F)

- 1) CASE 1 : Clamping to Hub
 $F = D + 12 + d_b$ ((Bolt Size))
- 2) CASE 2 : Clamping to Shaft
 $F = D - 12 - d_b$ ((Bolt Size))

2. Thickness of the Flange(P)

- 1) CASE 1 : Strength of Bolt 8.8
 $T = 1.3 \times d_b$ ((Bolt Size))
- 2) CASE 2 : Strength of Bolt 12.9
 $T = 1.8 \times d_b$ ((Bolt Size))

※ In case of Using multiple SAPL-R type
 – The width(W) between the Flange and Hub(Shaft) must be changed. Please refer to the next page

How to compute transferable Torque

$$TC = \frac{P_{total} - P_{pre-load}}{0.54} \times 0.12 \times \frac{d}{2000}$$

P_{total} = Number of Screw x P_b

$P_{pre-load}$ = Please refer to the next page

Bolt Size d_b	Force by a Bolt P_b [N]		
	Strength 8.8	Strength 10.9	Strength 12.9
M4	3900	5450	6550
M5	6350	8950	10700
M6	9000	12600	15100
M8	16500	23200	27900
M10	26200	36900	44300
M12	38300	54000	64500

※ In case of Using Multiple SAPL-R


- 1 set : $T_c = T_c$
- 2 set : $T_c = T_c \times 1.55$
- 3 set : $T_c = T_c \times 1.85$
- 3 set : $T_c = T_c \times 2.02$

SAPL-R Series

Sungil Accurate & Powerful Locking Device

Please, download CAD DATA from www.sungilfa.com

Specification

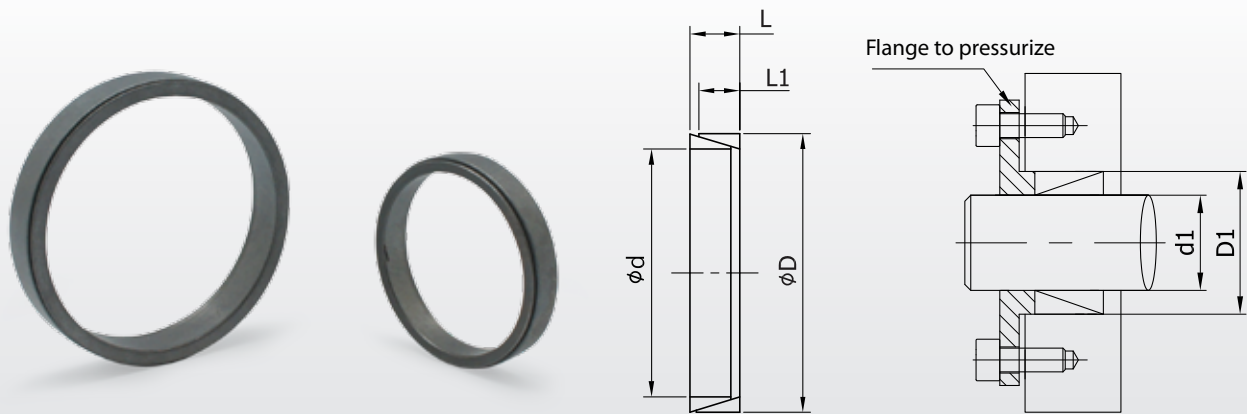

Model d x D	Dimension (mm)		Initial Clamping Force P _{pre-load} [N]	W in case of using several R types[mm]				Dimensions of the flange to pressurize[mm]		Surface Pressure [Mpa]		Mass [g]
	L ₁	L		1 set	2 set	3 set	4 set	d1	D1	Shaft (Pt)	Hub (Po)	
SAPL-R-6 x 9	3.7	4.5	8400	2.5	2.5	3	4	6.1	8.9	115	75	2
SAPL-R-7 x 10	3.7	4.5	8200	2.5	2.5	3	4	7.1	9.9	105	70	2
SAPL-R-8 x 11	3.7	4.5	7700	2.5	2.5	3	4	8.1	10.9	120	90	2
SAPL-R-9 x 12	3.7	4.5	7650	2.5	2.5	3	4	9.1	11.9	140	105	2
SAPL-R-10 x 13	3.7	4.5	7000	2.5	2.5	3	4	10.1	12.9	135	105	2
SAPL-R-11 x 14	3.7	4.5	7000	2.5	2.5	3	4	11.1	13.9	115	90	2
SAPL-R-12 x 15	3.7	4.5	7000	2.5	2.5	3	4	12.1	14.9	115	90	2
SAPL-R-13 x 16	3.7	4.5	6500	2.5	2.5	3	4	13.1	15.9	110	90	2
SAPL-R-14 x 18	5.3	6.3	11000	3.5	3.5	4.5	5.5	14.1	17.9	115	85	5
SAPL-R-15 x 19	5.3	6.3	10800	3.5	3.5	4.5	5.5	15.1	18.9	110	85	5
SAPL-R-16 x 20	5.3	6.3	10000	3.5	3.5	4.5	5.5	16.1	19.9	105	85	6
SAPL-R-17 x 21	5.3	6.3	9600	3.5	3.5	4.5	5.5	17.1	20.9	105	80	6
SAPL-R-18 x 22	5.3	6.3	9150	3.5	3.5	4.5	5.5	18.1	21.9	100	110	7
SAPL-R-19 x 24	5.3	6.3	12500	3.5	3.5	4.5	5.5	19.2	23.8	140	105	7
SAPL-R-20 x 25	5.3	6.3	12000	3.5	3.5	4.5	5.5	20.2	24.8	135	115	9
SAPL-R-22 x 26	5.3	6.3	9000	3.5	3.5	4.5	5.5	22.2	25.8	135	110	7
SAPL-R-24 x 28	5.3	6.3	8400	3.5	3.5	4.5	5.5	24.2	27.8	130	95	8
SAPL-R-25 x 30	5.3	6.3	10000	3.5	3.5	4.5	5.5	25.2	29.8	115	100	9
SAPL-R-28 x 32	5.3	6.3	7500	3.5	3.5	4.5	5.5	28.2	31.8	115	85	10
SAPL-R-30 x 35	5.3	6.3	8600	3.5	3.5	4.5	5.5	30.2	34.8	100	115	11
SAPL-R-32 x 36	5.3	6.3	7900	3.5	3.5	4.5	5.5	32.2	35.8	130	110	11
SAPL-R-35 x 40	6	7	10000	3.5	3.5	4.5	5.5	35.2	39.8	125	100	16
SAPL-R-36 x 42	6	7	11700	3.5	3.5	4.5	5.5	36.2	41.8	115	95	19
SAPL-R-38 x 44	6	7	11000	3.5	3.5	4.5	5.5	38.2	43.8	110	105	21
SAPL-R-40 x 45	6.6	8	13900	3.5	4.5	5.5	6.5	40.2	44.8	115	95	21
SAPL-R-42 x 48	6.6	8	15550	3.5	4.5	5.5	6.5	42.2	47.8	110	95	26
SAPL-R-45 x 52	8.6	10	28300	3.5	4.5	5.5	6.5	45.2	51.8	105	135	45
SAPL-R-48 x 55	8.6	10	24700	3.5	4.5	5.5	6.5	48.2	54.8	155	130	43
SAPL-R-50 x 57	8.6	10	23600	3.5	4.5	5.5	6.5	50.2	56.8	150	125	45

※ Pt (allowable thrust) indicates value when torque is 0, Tc (max allowable torque) indicates value when thrust load is 0. When thrust and torque are combined, use the equation given in design and install manual

※ For the best performance, you must remove rust, dust etc. on shaft, hub, inner side of body and cover's outer surface

SAPC Series



'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock.

Features

1. Aluminum Material

It is important to reduce the moment of inertia for high speed servo motor positioning control. High speed can be achieved by using the suitable aluminum power lock for aluminum pulley to realize low moment of inertia.

2. Optimized for Aluminum Pulley


There was slipping problem with servo motor when it was run by timing pulley since conventional connection unit had high surface pressure and the hub diameter was not appropriate, and unfit to shaft diameter. SAPC series lessened the number of bolts based on the standard specification of servo motor torque and reduced the surface pressure on the hub's inner diameter so that it is possible to connect with aluminum pulley.

3. New Structure for Bearing Positioning

An additional component is unnecessary because the product is designed to work as tension plate for bearing positioning stopper

4. Easy to determine the installation position


We have been suggested to leave the 1mm space for installation in advance considering the disassembling. However SAPC series does not need additional space for the hub to move when disassembling. Also it is easy to determine the power lock's position.

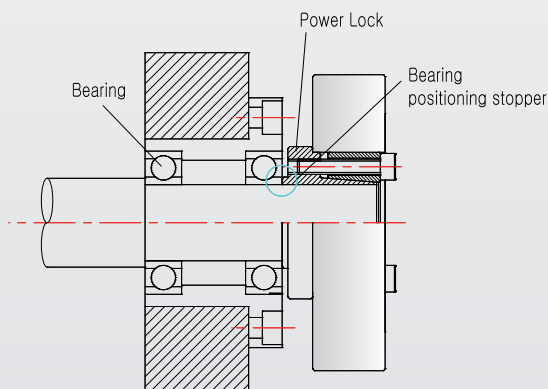

Registration of the patent: 10-1098255

- ※ Be careful for determining the hub's outer diameter because even if you select a high strength aluminum alloy for pulley, its young's modulus is low.
- ※ Contact us if you are using the combination of aluminum alloy and steel shaft over 80 °C circumstances because high temperature may reduce torque.

Structure & Material

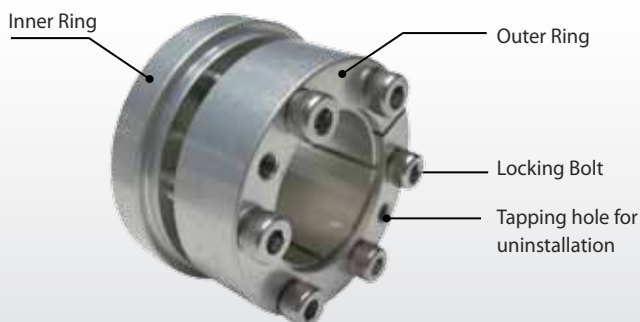


	Material	Surface Treatment
Inner Ring	Aluminum Alloy	Alumite
Outer Ring	Aluminum Alloy	Alumite
Locking Bolt	SCM 435	Electroless Nickel Coating

SAPC Series

Sungil Aluminum A.P. Lock

Specification

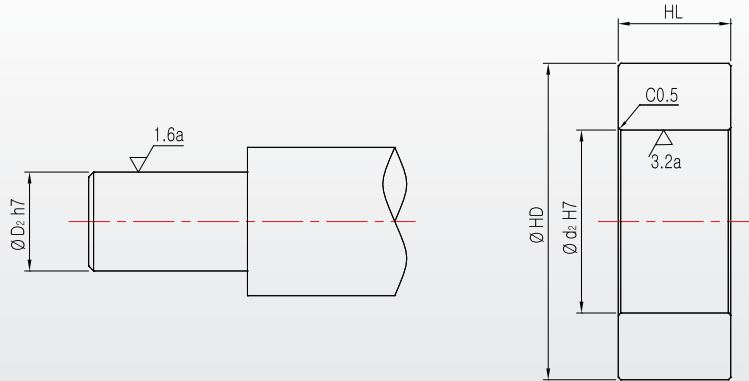

Shaft and Hub Dimension


Model No.	Max Permissible Torque (N.m)	Permissible Thrust Load (kN)	Surface pressure		Moment of Inertia (kg/m ²)	Shaft and Hub Dimension				
			Shaft (N/mm ²)	Hub (N/mm ²)		Dimension			Minimum Diameter of Hub(HD)	
						D ₂	d ₂	HL	Aluminum	S45C
SAPC-5-16	2.5	1.00	121	35	2.65×10^{-7}	5	16	9	20	19
SAPC-6-17	4	1.33	151	49	3.31×10^{-7}	6	17	9	23	21
SAPC-8-19	6	1.51	129	51	5.95×10^{-7}	8	19	10	26	24
SAPC-10-21	8	1.63	104	46	8.52×10^{-7}	10	21	10	29	26
SAPC-11-22	9	1.66	88	41	1.08×10^{-6}	11	22	11	30	26
SAPC-12-24	12	1.99	89	42	1.62×10^{-6}	12	24	12	33	29
SAPC-14-26	18	2.56	91	47	2.16×10^{-6}	14	26	12	38	31
SAPC-15-28	25	3.34	79	38	3.18×10^{-6}	15	28	13	40	33
SAPC-16-29	26	3.34	74	37	3.50×10^{-6}	16	29	13	41	34
SAPC-17-30	27	3.18	66	34	4.23×10^{-6}	17	30	14	42	35
SAPC-18-31	29	3.23	78	41	4.75×10^{-6}	18	31	14	46	36
SAPC-19-32	33	3.50	74	40	5.32×10^{-6}	19	32	14	49	37
SAPC-20-37	54	5.47	92	46	1.06×10^{-5}	20	37	16	54	44
SAPC-22-39	65	5.94	83	43	1.33×10^{-5}	22	39	16	56	46
SAPC-24-41	85	7.07	84	46	1.67×10^{-5}	24	41	18	59	48
SAPC-25-42	110	8.77	97	53	2.08×10^{-5}	25	42	19	64	51
SAPC-28-45	125	8.91	101	57	2.65×10^{-5}	28	45	19	72	55
SAPC-30-50	180	12.08	99	56	4.46×10^{-5}	30	50	20	76	60
SAPC-32-53	210	13.13	104	59	5.55×10^{-5}	32	53	20	81	65
SAPC-35-56	230	13.13	92	54	7.61×10^{-5}	35	56	22.5	85	67

- ※ The young's modulus of Aluminum is relatively low, so because of the deformation of hub, enough surface pressure might not be secured.
- ※ About 15-20% of transmittable Torque will be reduced due to key hole of shaft because surface contact is decreased.

SAPC Series Sungil Aluminum A.P. Lock

Please, download CAD DATA from www.sungilfa.com

Dimension

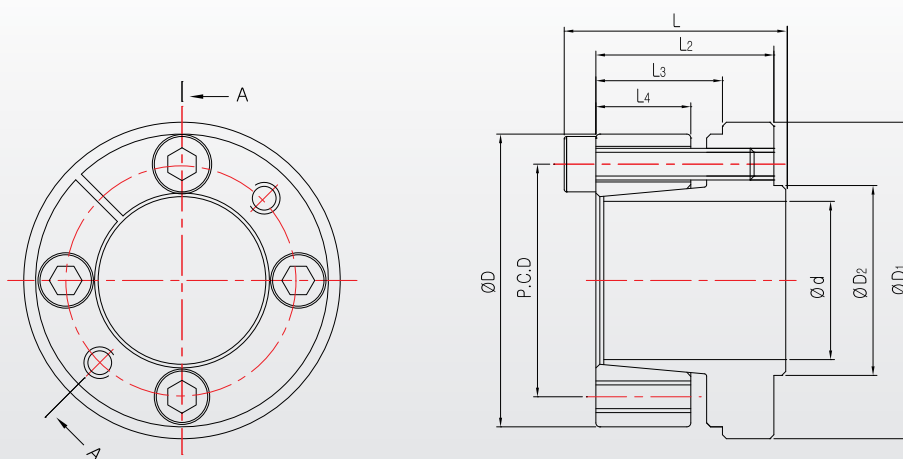

Model No. (dxD)	Dimension (mm)							Fastening Bolt			Mass (g)
	L	L ₂	L ₃	L ₄	D ₁	D ₂	P.C.D	Size	Quantity	Fastening Torque (N.m)	
SAPC-5-16	15.5	13	9	6.5	19	7.5	11.1	M2.5	2	1.3	7
SAPC-6-17	15.5	13	9	6.5	20	8.5	12.1	M2.5	3	1.3	8
SAPC-8-19	17.5	15	10	7.5	22	11	14.1	M2.5	4	1.3	11
SAPC-10-21	17.5	15	10	7.5	24	13	16.1	M2.5	4	1.3	12
SAPC-11-22	19.5	17	11	8	25	14	17.1	M2.5	4	1.3	14
SAPC-12-24	20.5	18	12	9	27	15	19.2	M2.5	5	1.3	17
SAPC-14-26	20.5	18	12	9	29	17	21.2	M2.5	6	1.3	19
SAPC-15-28	23	20	13	9.5	31	18.5	22.2	M3	4	2.3	24
SAPC-16-29	23	20	13	9.5	32	19.5	23.2	M3	4	2.3	25
SAPC-17-30	24	21	14	10	33	20.5	24	M3	4	2.3	28
SAPC-18-31	24	21	14	10	34	21.5	25	M3	5	2.3	29
SAPC-19-32	24	21	14	10	35	22.5	26	M3	5	2.3	30
SAPC-20-37	28	24	16	12	40	24	29.4	M4	4	5.1	47
SAPC-22-39	28	24	16	12	42	26	31.4	M4	4	5.1	52
SAPC-24-41	30	26	18	13	45	28	33.3	M4	5	5.1	57
SAPC-25-42	32	28	19	13.5	46	29	34.3	M4	6	5.1	67
SAPC-28-45	32	28	19	13.5	49	32	37.3	M4	7	5.1	73
SAPC-30-50	35	30	20	14.5	55	34.5	41.3	M5	5	10.0	101
SAPC-32-53	35	30	20	14.5	58	36.5	43.3	M5	6	10.0	112
SAPC-35-56	38	33	22.5	16	62	40	46.6	M5	6	10.0	134

SAPA Series

Sungil Aluminum A.P. Lock



'SAP' mark(Trademark : 40-2011-0011919) is the original trademark for SUNGIL's A.P. Lock.



Features

1. Aluminum Material

It is important to reduce the moment of inertia for high speed servo motor positioning control. High speed can be achieved by using the suitable aluminum power lock for aluminum pulley to realize low moment of inertia.

2. High Transmittable Torque


It is possible to use this type in aluminum pulley and also in steel pulley because it is made by high strength aluminum alloy which is capable to transfer high torque.

3. Optimized in clean Room

SAPA is made with aluminum alloy and nickel-chrome-coated bolt to be optimized in clean room


- ※ Be careful for determining the hub's outer diameter because even if you select a high strength aluminum alloy for pulley, its young's modulus is low.
- ※ Contact us if you are using the combination of aluminum alloy and steel shaft over 80 °C circumstances because high temperature may reduce torque.

Structure & Material

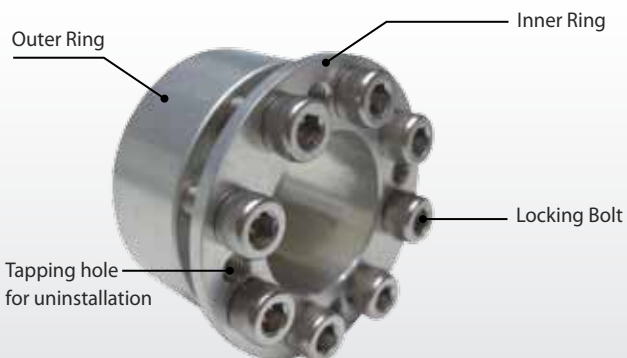

	Locking Bolt	Surface Treatment
Inner Ring	Aluminum Alloy	Alumite
Outer Ring	Aluminum Alloy	Alumite
Locking Bolt	SCM 435	Electroless Nickel Coating

The Principle of Tightening

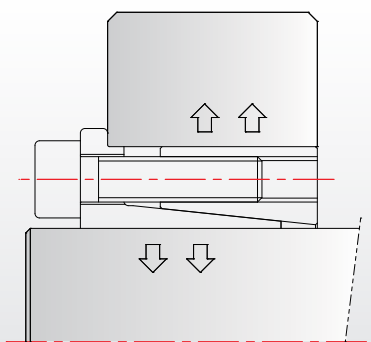


How to Order



SAPA Series Sungil Aluminum A.P. Lock

Please, download CAD DATA from www.sungilfa.com

Specification

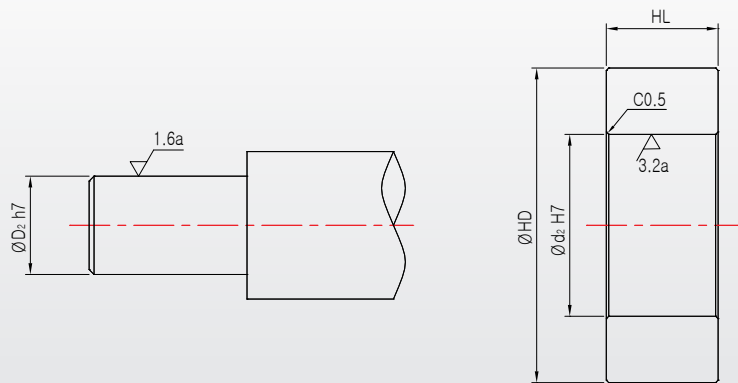

Shaft and Hub Dimension

Model No. (dxD)	Max Permissible Torque (N.m)	Permissible Thrust Load (kN)	Surface pressure		Moment of Inertia (kg/m^2)	Shaft and Hub Dimension				
			Surface pressure	Hub(N/mm^2)		Dimension			Minimum Diameter of Hub (HD)	
						D_2	d_2	HL	알루미늄	S45C
SAPA-5-16	6	2.24	197	64	2.63×10^{-7}	5	16	13	28	22
SAPA-6-19	11	3.74	285	92	6.13×10^{-7}	6	19	14	35	27
SAPA-8-21	18	4.48	214	96	8.74×10^{-7}	8	21	15	39	30
SAPA-10-23	20	4.48	167	86	1.23×10^{-6}	10	23	16	41	32
SAPA-11-24	24	4.48	153	83	1.44×10^{-6}	11	24	16	42	33
SAPA-12-26	40	6.73	209	103	2.38×10^{-6}	12	26	17	50	38
SAPA-14-28	52	7.57	202	108	3.08×10^{-6}	14	28	17	56	42
SAPA-15-29	56	7.57	167	95	3.66×10^{-6}	15	29	18	53	41
SAPA-16-30	60	7.57	149	88	4.28×10^{-6}	16	30	18	54	42
SAPA-17-31	88	10.08	177	109	5.13×10^{-6}	17	31	19	61	46
SAPA-18-32	92	10.08	167	106	5.71×10^{-6}	18	32	19	62	47
SAPA-19-33	96	10.08	159	102	7.20×10^{-6}	19	33	19	63	48
SAPA-20-38	176	17.28	186	111	1.55×10^{-5}	20	38	23	82	60
SAPA-22-40	232	20.80	204	126	1.84×10^{-5}	22	40	23	96	68
SAPA-24-42	256	20.80	173	113	2.23×10^{-5}	24	42	24	92	67
SAPA-25-43	270	21.76	172	109	2.49×10^{-5}	25	43	25	91	67
SAPA-28-46	290	21.60	153	101	3.36×10^{-5}	28	46	25	92	69
SAPA-30-48	320	21.60	142	97	3.86×10^{-5}	30	48	25	94	71
SAPA-32-50	352	21.60	124	88	4.60×10^{-5}	32	50	26	92	71
SAPA-35-57	576	32.88	195	132	8.46×10^{-5}	35	57	28	121	89


※ The young's modulus of Aluminum is relatively low, so because of the deformation of hub, enough surface pressure might not be secured.

※ About 15-20% of transmittable torque will be reduced due to key hole of shaft because surface contact is decreased..

SAPA Series

Sungil Aluminum A.P. Lock

Dimension

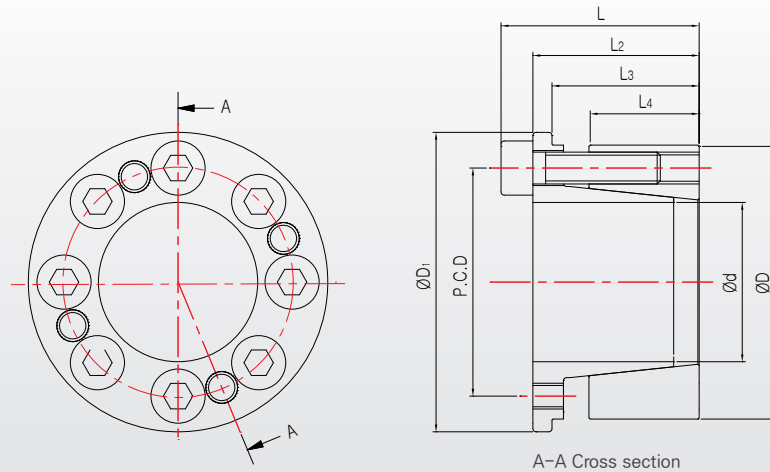

Model No. (dxD)	Dimension (mm)						Fastening Bolt			Mass (g)
	L	L ₂	L ₃	L ₄	D ₁	P.C.D	Size	Quantity	Fastening Torque(N.m)	
SAPA-5-16	16	13	11.2	8	18.5	11.7	M3	4	2.3	7
SAPA-6-19	18.3	14.3	12.3	9	21.5	14	M4	4	5.1	10
SAPA-8-21	18.6	14.6	12.6	9.3	23.5	15.4	M4	4	5.1	13
SAPA-10-23	18.8	14.8	12.8	9.5	25.5	17.5	M4	4	5.1	15
SAPA-11-24	19.8	15.8	13.8	10.5	26.5	18.4	M4	4	5.1	17
SAPA-12-26	22	18	15.5	10.5	28.5	20.2	M4	6	5.1	20
SAPA-14-28	22	18	15.5	10.5	30.5	22.2	M4	6	5.1	23
SAPA-15-29	23	19	16.5	11.5	31.5	23.2	M4	6	5.1	25
SAPA-16-30	23.6	19.6	17.1	12	33	24.2	M4	6	5.1	28
SAPA-17-31	24.1	20.1	17.6	12.5	33.5	25.4	M4	8	5.1	28
SAPA-18-32	24.1	20.1	17.6	12.5	34.5	26.4	M4	8	5.1	30
SAPA-19-33	24.1	20.1	17.6	12.5	35.5	27.4	M4	8	5.1	31
SAPA-20-38	29.1	24.1	21.1	15.3	42	30.8	M5	8	10.0	53
SAPA-22-40	29.1	24.1	21.1	15.3	44	32.8	M5	8	10.0	60
SAPA-24-42	30.1	25.1	22.1	16.3	46	34.8	M5	8	10.0	65
SAPA-25-43	31.1	26.1	23.1	17.3	47	35.8	M5	8	10.0	68
SAPA-28-46	31.6	26.6	23.1	17.3	50	38.8	M5	10	10.0	71
SAPA-30-48	31.6	26.6	23.1	17.3	52	40.8	M5	10	10.0	76
SAPA-32-50	32.6	27.6	24.1	18.3	54	42.8	M5	10	10.0	80
SAPA-35-57	36	30	26	19.5	62	48.4	M6	8	18.0	117

MEMO

A series of horizontal dotted lines for writing a memo.



SUNGIL MACHINERY CO., LTD.

www.sungilfa.co.kr / www.sungilfa.com

Main Office and factory

Mullae-dong2ga, 9, Gyeonin-Ro77Gil, Yeongdeungpo-gu Seoul Korea

TEL: +82-2-2635-7161 / FAX: +82-2635-7162 / E-mail: info@sungilfa.co.kr / URL: www.sungilfa.co.kr

Overseas Sales Dept.

#1101-1104 Guro STX W-Tower 615-3 Guro-gu Seoul Korea 152-721

TEL: +82-2-2613-9933 / FAX: +82-2-2613-8911 / E-mail : sales@sungilfa.co.kr

Domestic Sales Office

#1101-1104 Guro STX W-Tower 615-3 Guro-gu Seoul Korea 152-721

TEL: +82-2-2613-9933 / FAX: +82-2-2613-8911 / E-mail : sales@sungilfa.co.kr



Inquiry

TEL: +82-2-2613-9933 / FAX: +82-2-2613-8911 / E-mail : sales@sungilfa.co.kr