





Everyday's Solution



Control24.ir



05137292424





09027292424

Intelligent Voltage-Current Protector 1P/3P



Technical Data

1P	
Model	ISVAP-1
Rated supply voltage	220VAC
Rated frequency	50/60 Hz
Electric current(>A) setting range	1-63A
Consumption power	2W±
Mechanic and Electrical life	10 ⁵ ·10 ⁶
Reset/start delay	1-300S
Operation voltage range	80V-400VAC
Voltage measurement accuracy	1%
Overvoltage(>U) setting range	230-300V
Undervoltage (<U) setting range	120-210V
>U and < U trip delay	0.5 S
Rated insulation voltage	400 V
Output contact	1 NO
Operating temperature	-50 ~ +55 °C
Pollution degree	IP20
Rail	
Standard No	EN61000-3-2: 2019/2013 / JB/T 12762-2015

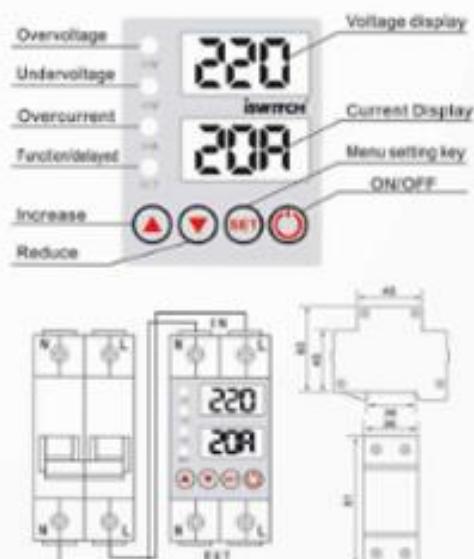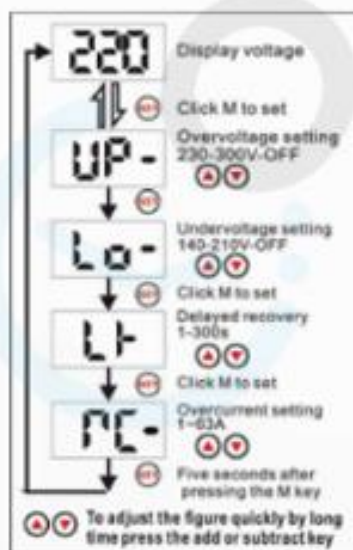



SGS

EN61000-3-2: 2019/2013
JB/T 12762-2015

iSWITCH | ele.®



Technical Data

3P

Model	ISVAP-3
Rated supply voltage	380VAC
Rated frequency	50/60 Hz
Electric current(>A) setting range	1-63A
Consumption power	2W≤
Mechanic and Electrical life	10S-106
Reset/start delay	1-500S
Operation voltage range	140V-500VAC
Voltage measurement accuracy	1%
Overvoltage(>U) setting range	390-500V
Undervoltage (<U) setting range	140-370V
>U and < U trip delay	0.5 S
Rated insulation voltage	400 V
Output contact	3 NO
Operating temperature	-50 ~ +55°C
Pollution degree	IP20
Rail	
Standard No	EN61000-3-2: 2019/2013 / JB/T 12762-2015

